

BEFORE THE WASHINGTON UTILITIES AND TRANSPORTATION COMMISSION

DOCKET NO. UG-15\_\_\_\_\_

EXHIBIT NO. \_\_\_\_ (JM-2)

JODY MOREHOUSE

REPRESENTING AVISTA CORPORATION



# 2014 Natural Gas Integrated Resource Plan

August 31, 2014





## **Safe Harbor Statement**

This document contains forward-looking statements. Such statements are subject to a variety of risks, uncertainties and other factors, most of which are beyond the Company's control, and many of which could have a significant impact on the Company's operations, results of operations and financial condition, and could cause actual results to differ materially from those anticipated.

For a further discussion of these factors and other important factors, please refer to the Company's reports filed with the Securities and Exchange Commission. The forward-looking statements contained in this document speak only as of the date hereof. The Company undertakes no obligation to update any forward-looking statement or statements to reflect events or circumstances that occur after the date on which such statement is made or to reflect the occurrence of unanticipated events. New factors emerge from time to time, and it is not possible for management to predict all of such factors, nor can it assess the impact of each such factor on the Company's business or the extent to which any such factor, or combination of factors, may cause actual results to differ materially from those contained in any forward-looking statement.

## TABLE OF CONTENTS

0	Executive Summary .....	Page 1
1	Introduction .....	Page 15
2	Demand Forecasts .....	Page 25
3	Demand Side Resources .....	Page 43
4	Supply Side Resources .....	Page 61
5	Integrated Resource Portfolio.....	Page 81
6	Alternate Scenarios, Portfolios, and Stochastic Analysis .....	Page 111
7	Distribution Planning .....	Page 125
8	Action Plan.....	Page 133
9	Glossary of Terms and Acronyms .....	Page 137

## Executive Summary

Avista Corporation's 2014 Natural Gas Integrated Resource Plan (IRP) identifies a strategic natural gas resource portfolio to meet customer demand requirements over the next 20 years. While the primary focus of the IRP is meeting customers' needs under peak weather conditions, this process also provides a methodology for evaluating customer needs under normal or average conditions. The formal exercise of bringing together customer demand forecasts with comprehensive analyses of resource options, including supply-side resources and demand-side measures, is valuable to Avista, its customers, regulatory agencies, and other stakeholders for long-range planning.

## IRP Process and Stakeholder Involvement

The IRP is a coordinated effort by several Avista departments along with input from our Technical Advisory Committee (TAC), which includes Commission Staff, peer utilities, customers, and other stakeholders. This group is a vital component of our IRP process, as it provides a forum for the exchange of ideas from multiple perspectives, identifies issues and risks, and improves analytical methods. Topics discussed with the TAC include natural gas demand forecasts, demand-side management (DSM), supply-side resources, modeling tools, and distribution planning. The process results in a resource portfolio designed to serve our customers' natural gas needs while balancing cost and risk.

*Avista's collaborative planning process results in a resource portfolio that meets customers' long-term needs considering cost and risk.*

## Planning Environment

A long-term resource plan must address the uncertainties inherent in any planning exercise. Compared to prior planning cycles, there is more certainty about the availability of natural gas and that much of it can be extracted at favorable prices for consumers. However, some of the uses of this plentiful and economic energy resource are unknown. There are questions concerning an industrial renaissance, the amount of liquefied natural gas (LNG) exports, the market for natural gas vehicles, and power generation. We continue to challenge key assumptions by evaluating multiple scenarios over a range of possible outcomes to address the uncertainties.

## Demand Forecasts

Avista defines eight distinct demand areas in this IRP structured around the pipeline transportation and storage resources that serve them. Demand areas include four large Avista service territories (Washington/Idaho; Medford/Roseburg, Oregon; Klamath Falls,

## Executive Summary

Oregon and La Grande, Oregon) and then disaggregated by the pipelines that serve them. The Washington/Idaho service territory includes areas served only by Northwest Pipeline (NWP), only by Gas Transmission Northwest (GTN), and by both pipelines. The Medford service territory includes an area served by NWP and GTN.

Avista's approach to demand forecasting focuses on customer growth and use-per-customer as the base components of demand. Avista recognizes and accounts for weather as the most significant direct demand-influencing factor. Other demand influencing factors studied include population, employment trends, age and income demographics, construction trends, conservation technology, new uses (e.g. natural gas vehicles), and use-per-customer trends.

Recognizing that customers may adjust consumption in response to price, Avista analyzed factors that could influence natural gas prices and demand through price elasticity. These included:

- **Supply Trends:** shale gas, Canadian supply availability, and export LNG.
- **Infrastructure Trends:** regional pipeline projects, national pipeline projects, and storage.
- **Regulatory Trends:** subsidies, market transparency/speculation, and carbon legislation.
- **Other Trends:** thermal generation and energy correlations (i.e. oil/gas, coal/gas, liquids/gas).

Avista developed a historical-based reference case and conducted sensitivity analysis on key demand drivers by varying assumptions to understand how demand changes. Using this information and incorporating input from the TAC, Avista created several alternate demand scenarios for detailed analysis. Table 1 summarizes these scenarios, which represent a range of potential outcomes. The Average Case represents Avista's demand forecast for normal planning purposes. The Expected Case is the most likely scenario for peak day planning purposes.

**Table 1: Demand Scenarios**

<b>2014 IRP Demand Scenarios</b>
<b>Average Case</b>
<b>Expected Case</b>
<b>High Growth, Low Price</b>
<b>Low Growth, High Price</b>
<b>Alternate Weather Standard</b>

## Executive Summary

The IRP process defines the methodology for the development of two primary types of demand forecasts – annual average daily and peak day. The annual average daily demand forecast is useful for preparing revenue budgets, developing natural gas procurement plans, and preparing purchased gas adjustment filings. Forecasts of peak day demand are critical for determining the adequacy of existing resources or the timing for new resource acquisitions to meet our customers' natural gas needs in extreme weather conditions. The demand forecasts from the Average and Expected Cases revealed the following as shown in Table 2:

**Annual Average Daily Demand** – Expected average day, system-wide core demand increases from an average of 91,352 dekatherms per day (Dth/day) in 2014 to 102,937 Dth/day in 2033. This is an annual average growth rate of 0.7 percent and is net of projected conservation savings from DSM programs. Appendix 3.9 shows gross demand, DSM savings and net demand.

**Peak Day Demand** – Expected coincidental peak day, system-wide core demand increases from a peak of 358,736 Dth/day in 2014 to 404,122 Dth/day in 2033. Forecasted non-coincidental peak day demand peaks at 333,129 Dth/day in 2014 and increases to 375,747 Dth/day in 2033 a 0.6 percent compounded growth rate in peak day requirements. This is also net of projected conservation savings from DSM programs.

**Table 2: Annual Average and Peak Day Demand Cases (Dth/day)**

Year	Annual Average Daily Demand	Peak Day Demand	Non-coincidental Peak Day Demand
2014	91,352	358,736	333,129
2033	102,937	404,122	375,747

Figure 1 shows forecasted average daily demand for the five main demand scenarios modeled over the IRP planning horizon.

Executive Summary

**Figure 1: Average Daily Demand**


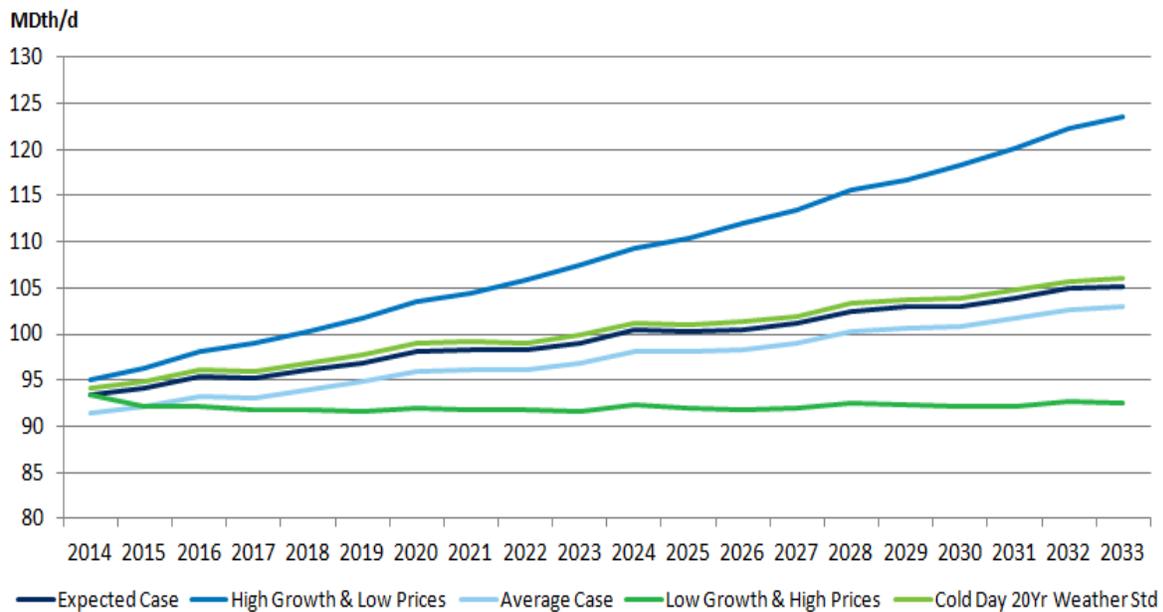


Figure 2 shows forecasted system-wide peak day demand for the five main demand scenarios modeled over the IRP planning horizon.

**Figure 2: Peak Day Demand Scenarios (Net of DSM Savings)**

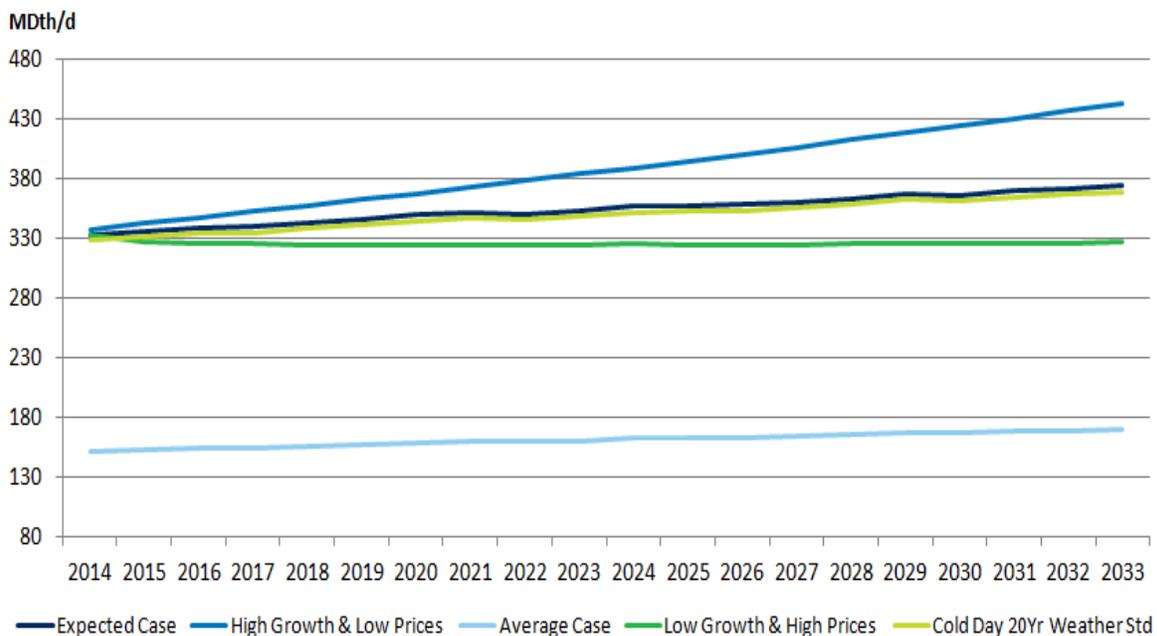

## Executive Summary

**Natural Gas Price Forecasts**


Natural gas prices are a fundamental component of integrated resource planning because the commodity price is a significant component of the total cost of a resource option. This affects the avoided cost threshold for determining cost-effectiveness of conservation measures. The price of natural gas also influences the consumption of natural gas by customers. A price elasticity adjustment to use per customer reflects customer response to changing natural gas prices.

With more information known about the costs and volumes produced by shale gas there appears to be consensus that production costs will continue to stay low for quite some time. Avista expects continued low prices even with increased incremental demand for LNG exports, transportation fuels, and increased industrial consumption.

The carbon legislation debate continues. Avista's current thinking is that carbon legislation at the federal level may not occur, but will occur at the state level or in a regulatory setting like the Environmental Protection Agency's (EPA) recent proposals to regulate carbon emissions from electric generation. Current IRP price forecasts include a lower federal carbon tax that occurs later than prior IRPs. To address the uncertainty about carbon legislation, Avista analyzed three carbon sensitivities and their impact to the demand forecasts.

Avista reviewed several price forecasts from credible sources and selected high, medium, and low price forecasts to represent a reasonable range of pricing possibilities for the IRP analysis. The range of prices provides necessary variation for addressing uncertainty of future prices. Figure 1.3 depicts the price forecasts used in this IRP.

## Executive Summary

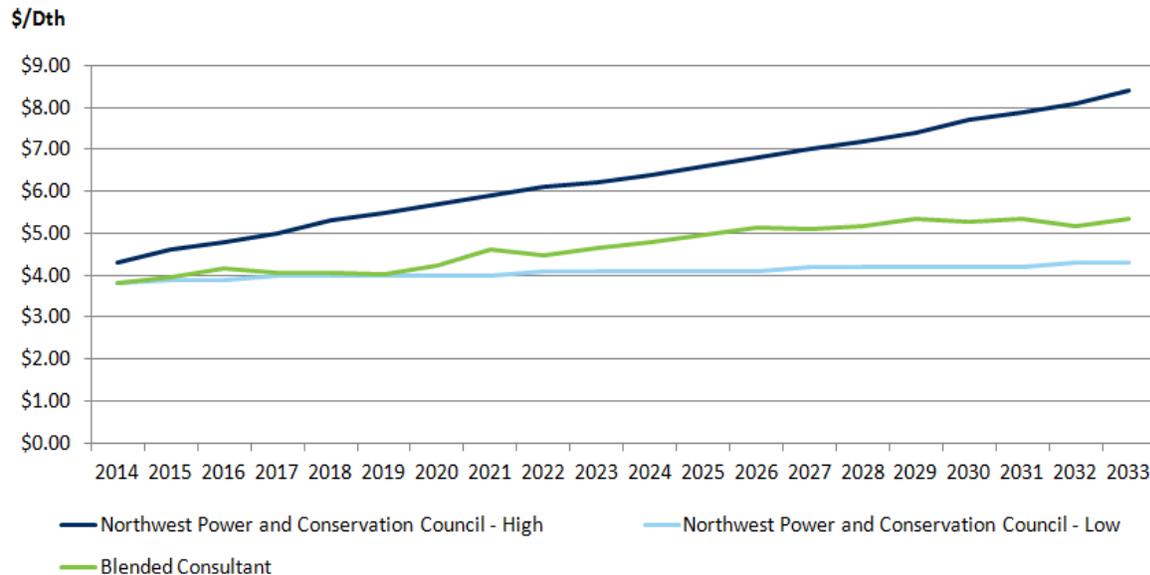**Figure 3: Low/Medium/High Henry Hub Forecasts (Real \$/Dth)**

Historical statistical analysis shows a long run consumption response to price changes. In order to model consumption response to these price curves, Avista utilized an expected elasticity response factor that was applied under various scenarios. Avista will continue to monitor and research this assumption and make any necessary adjustments as described in the Ongoing Activities section of Chapter 8 – Action Items.

## Existing and Potential Resources

Avista has a diversified portfolio of natural gas supply resources, including access to and contracts for the purchase of natural gas from several supply basins; owned and contracted storage providing supply source flexibility; and firm capacity rights on six pipelines. For potential resource additions, Avista considers incremental pipeline transportation, storage options, distribution enhancements, and various forms of LNG storage or service.

Avista models aggregated conservation potential that reduces demand if the conservation programs are cost-effective over the planning horizon. The identification and incorporation of conservation savings into the SENDOUT® model utilize projected natural gas prices and the estimated cost of alternative supply resources. The operational business planning process starts with IRP identified savings and ultimately determines the near term program offerings. Given current avoided costs, a limited number of programs are cost effective in Idaho, Oregon, and Washington. Currently, Avista is not running natural gas DSM programs in Idaho. Avista actively promotes cost-


## Executive Summary

effective efficiency measures to our customers as one component of a comprehensive strategy to arrive at mix of best cost/risk adjusted resources.

### Resource Needs

In the Average Case demand scenario, using Avista's existing supply resources, the analysis showed no resource deficiencies in the 20-year planning horizon. The Expected Case demand scenario, using the existing resources, determined when the first year peak day demand would not be fully served. Figure 4 summarizes the results of this portfolio. Avista is not resource deficient in the Expected Case in the 20-year planning horizon.


**Figure 4: Expected Case – First Year Demand Not Met with Existing Resources**

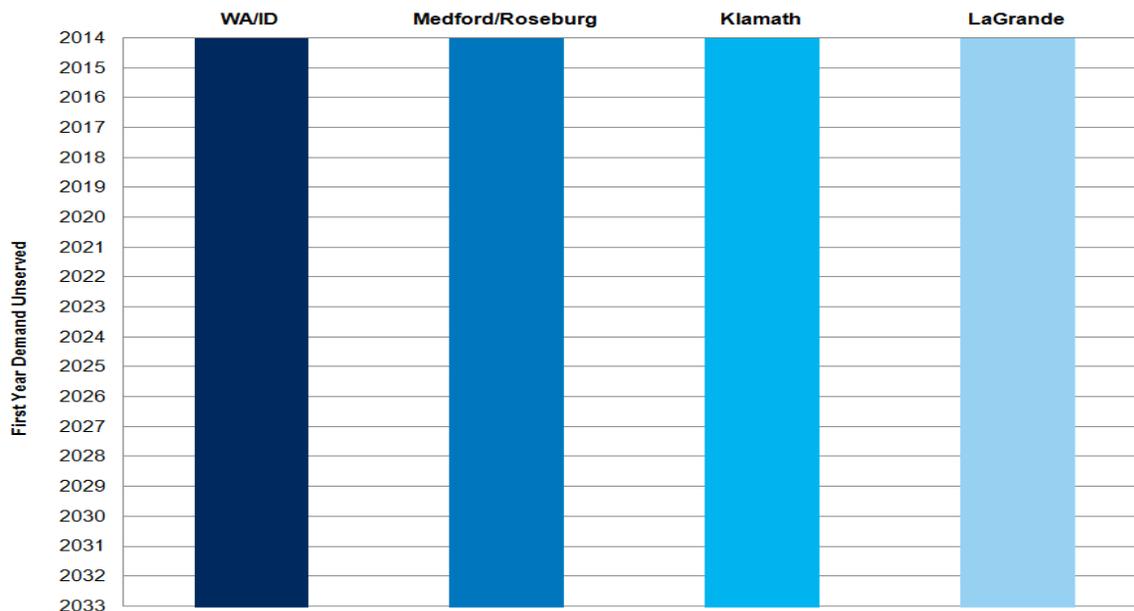


Figures 5 through 8 illustrate Avista's peak day demand by service territory for both this and the prior IRP. These charts compare existing peak day resources to expected peak day demand by year and show the timing and extent of resource deficiencies, if any, for the Expected Case. Based on this information, Avista has time to carefully monitor, plan and take action on potential resource additions as described in Chapter 8 – Ongoing Activities.

Executive Summary

**Figure 5: Expected Case – WA/ID Existing Resources vs. Peak Day Demand (Net of DSM)**

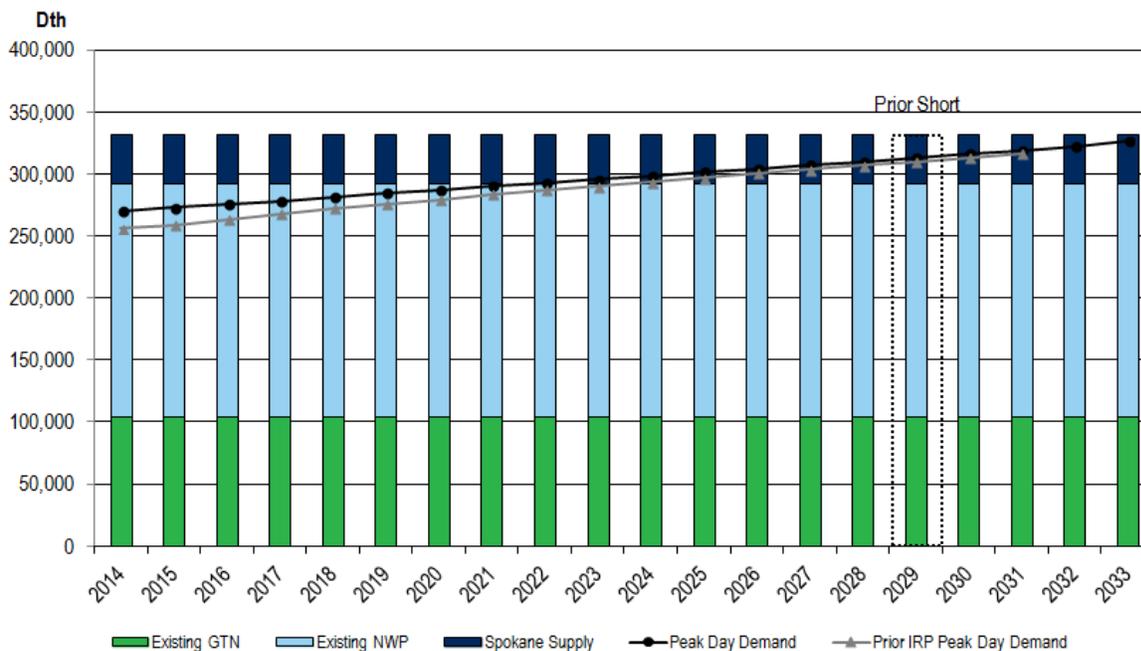


**Figure 6: Expected Case – Medford/Roseburg Existing Resources vs. Peak Day Demand (Net of DSM)**

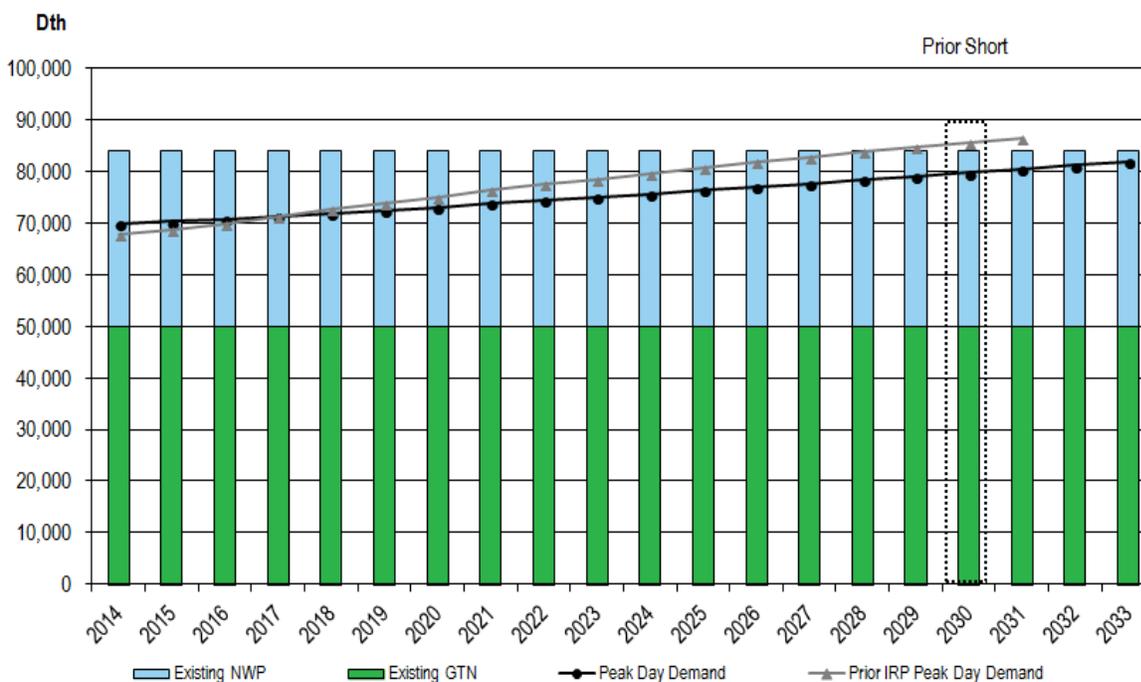


Executive Summary

**Figure 7: Expected Case – Klamath Falls Existing Resources vs. Peak Day Demand (Net of DSM)**

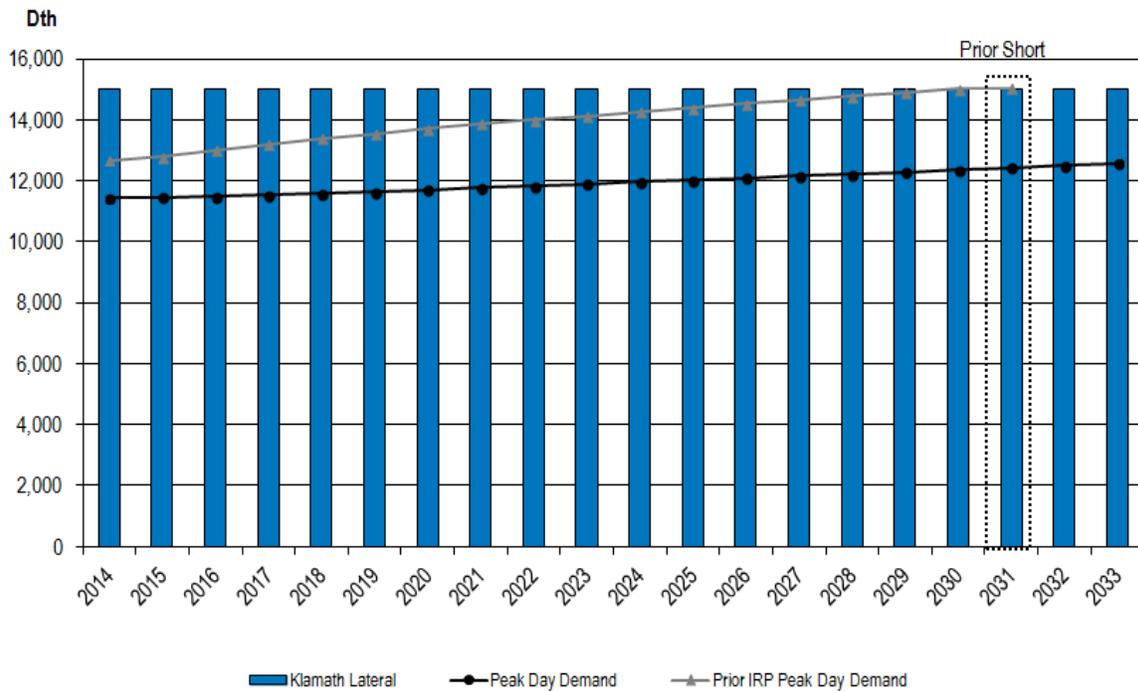


**Figure 8: Expected Case – La Grande Existing Resources vs. Peak Day Demand (Net of DSM)**

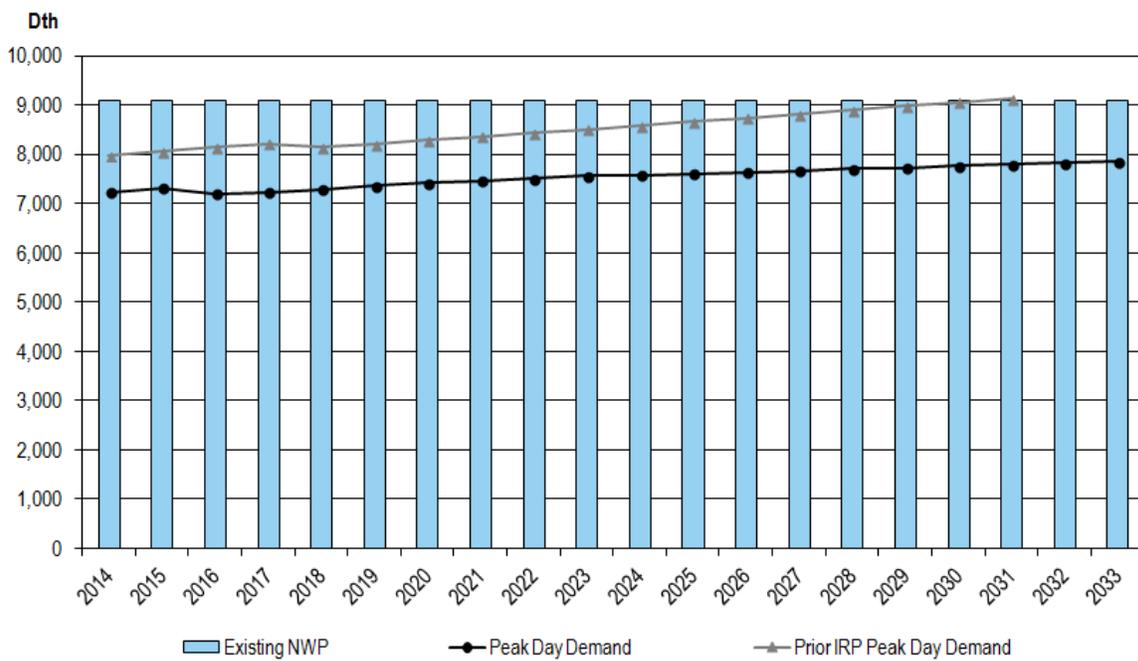

## Executive Summary

A critical risk is the slope of forecasted demand growth, which is almost flat in Avista's current projections. This outlook implies that existing resources will be sufficient within the planning horizon to meet demand. However, if demand growth accelerates, the steeper demand curve could quickly accelerate resource shortages by several years. Figure 1.9 conceptually illustrates this risk. In this hypothetical example, a resource shortage does not occur until year eight in the initial demand case. However, the shortage dramatically accelerates by five years under the revised demand case to year three. This "flat demand risk" necessitates close monitoring of accelerating demand, as well as careful evaluation of lead times to acquire the preferred incremental resource.


**Figure 9: Flat Demand Risk Example**

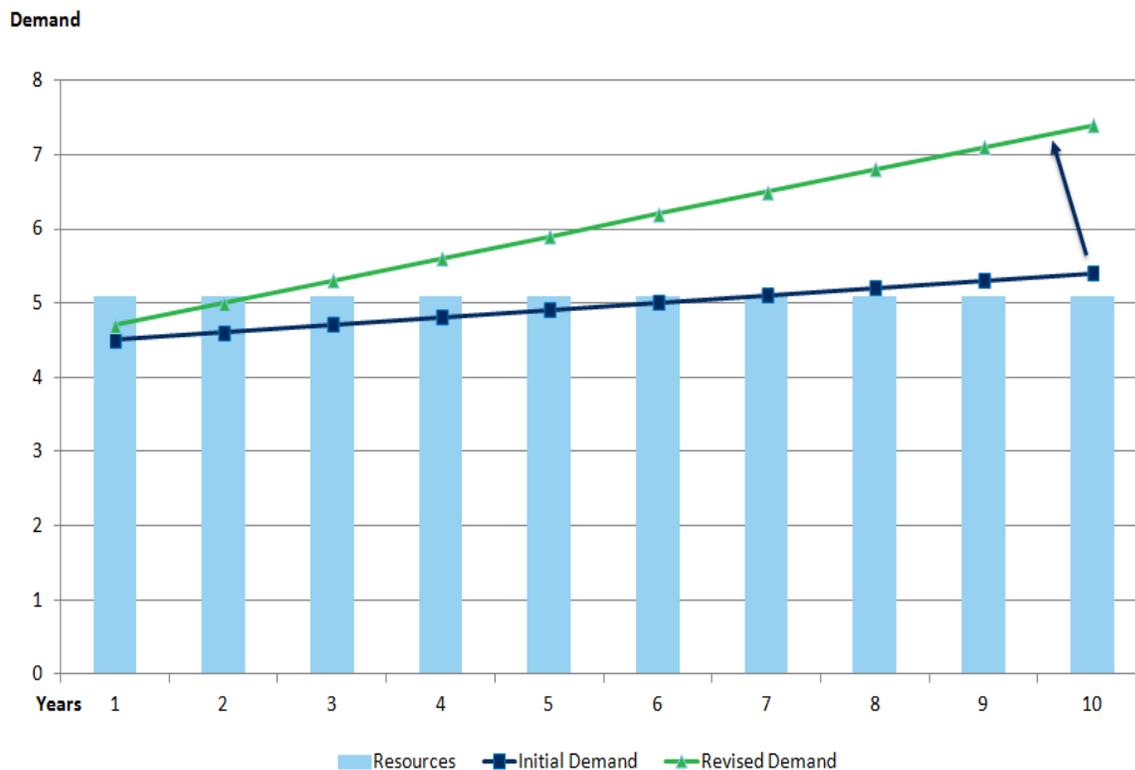

### Alternate Demand Scenarios

Avista performed the same analysis for four other demand scenarios- Average, High Growth/Low Price, Low Growth/High Price, and Coldest in 20 years. As expected, the High Growth/Low Price scenario has the most rapid growth and is the only scenario with unserved demand. This "steeper" demand lessens the "flat demand risk" discussed above, yet resource deficiencies occur very late in the planning horizon. Figure 10 shows first year resource deficiencies under each scenario.

**Figure 10: Scenario Comparisons of First Year Peak Demand Not Met with Existing Resources**

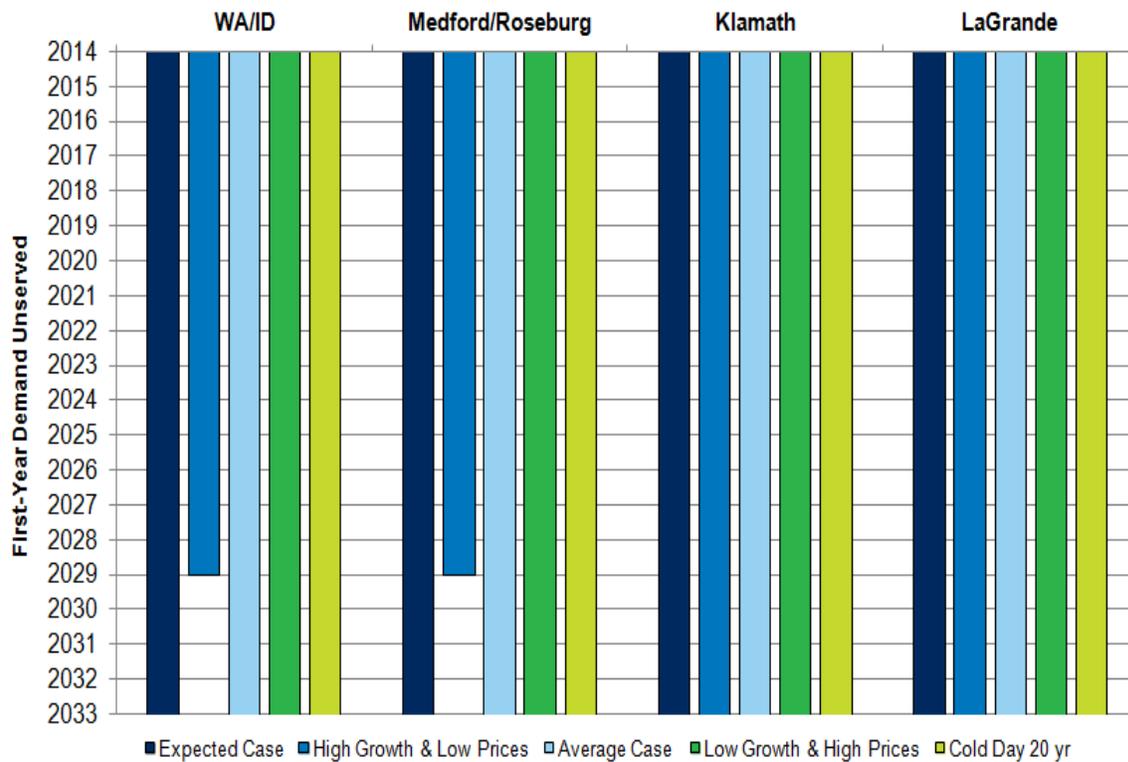

## Issues and Challenges

Even with the planning, analysis, and conclusions reached in this IRP, there is still uncertainty requiring diligent monitoring of the following issues and challenges.

### Demand Issues

The recent recession had a significant impact on the future customer growth trajectory in Avista’s service territory leading to a declining use per customer. Because of this the long-term forecast for natural gas demand has declined dramatically. Considering a broad range of demand scenarios provides insight into how quickly resource needs can change if demand varies from the Expected Case.

With an increase in natural supply and subsequent low costs, there is increasing interest in using natural gas. Avista does not anticipate that traditional residential and commercial customers will provide growth in demand. There is potential for increased natural gas usage in other markets, such as transportation fuel and power generation, or as an industrial feedstock. Most of these emerging markets will not be core customers of the LDC, however they will affect regional gas infrastructure and could affect natural gas pricing.

## Executive Summary

**Price Issues**

Shale gas has changed the face of North American gas supply. The abundance of shale along with lagging demand has created a near-term supply glut that kept prices at low levels. The winter of 2013-2014 brought increased demand and rebalanced the market, reversing the downward pricing trend. However, the relatively higher prices are a short-term phenomenon and forecasters anticipate a return to lower prices. This would be beneficial for customers, but experience has shown that markets can change quickly and dramatically. To address this uncertainty, this plan includes high and low price scenarios along with stochastic price analysis to capture a range of possible prices.

**LNG Exports**

The availability of plentiful amounts of natural gas in North America has changed global LNG dynamics. Existing and new LNG facilities are looking to export low cost North American gas to the higher priced Asian and European markets. In Canada, 16 LNG export projects are in various stages of the permitting process. In the Northwest, there are 2 proposed terminals in Oregon. How many of these terminals actually get approval and ultimately built is yet to be determined. However, LNG exporting has the potential to alter the price, constrain existing pipeline networks, stimulate development of new pipeline resources, and change flows of natural gas across North America.

**Action Plan**

Avista's 2015-2016 Action Plan outlines activities identified by the IRP team, with input from management and TAC members, for development and inclusion in this IRP. The purpose of these action items is to position Avista to provide the best cost/risk resource portfolio and to support and improve IRP planning. The Action Plan identifies needed supply and demand side resources and highlights key analytical needs in the near term. It also highlights essential ongoing planning initiatives and gas industry trends Avista will be monitoring as a part of its routine planning processes (Chapter 8 – Action Items).

The IRP analysis indicates there is no near term needs to acquire additional supply side resources to meet customer demand. Therefore, appropriate management of existing resources is paramount. Optimizing underutilized resources reduces costs to customers while providing reliability if customers' needs exceed forecasted expectations.

Avista also pursues cost-effective demand-side solutions, but recognizes the challenges of the current low cost environment. Within the IRP, Washington and Idaho conservation measures aim to reduce demand by approximately 151,500 dekatherms in 2015. In Oregon, conservation measures aim to reduce demand by approximately 16,100 dekatherms in 2015.

Avista will comply with Commission findings to try to increase the cost effectiveness of measures within the portfolio by reducing administration and audit costs, analyzing non-

## Executive Summary

natural gas benefits, and increasing measure lives. Natural gas prices will be monitored as a leading indicator for increasing avoided costs. If avoided costs increase, DSM programs will be evaluated for cost-effectiveness and Avista will be proactive in submitting to the Commissions to resume natural gas DSM options.

Completion of the gate station analysis to assess any resource deficiencies masked by Avista's aggregated IRP analysis. Should deficiencies be identified we will discuss findings and potential solutions with Commission Staff. Avista will continue to coordinate analytic efforts between Gas Supply, Gas Engineering, and the intrastate pipelines to perform gate station analysis and develop least cost solutions for any future deficiencies.

Key ongoing components of the Action Plan include:

- Monitor actual demand for growth exceeding the forecast to respond aggressively to address potential accelerated resource deficiencies arising from exposure to "flat demand" risk. This will include providing Commission Staff with IRP demand forecast-to-actual variance analysis on customer growth and use per customer. Avista will provide these updates to each Commission Staff at least bi-annually.
- Continue to monitor supply resource trends including the availability and price of natural gas to the region, LNG exports, Canadian natural gas supply availability and interprovincial consumption, and pipeline and storage infrastructure availability.
- Monitor availability of current resource options and assess new resource lead-time requirements relative to resource need to preserve flexibility.
- Meet regularly with Commission Staff to provide information on market activities and significant changes in assumptions and/or status of Avista activities related to the IRP or natural gas procurement practices.

## **CONCLUSION**

Anticipated low customer growth has eliminated the need for Avista to acquire additional supply-side resources, therefore appropriate management of underutilized resources to reduce costs until resources are needed is essential. Additionally, the lower cost of natural gas continues to challenge the cost-effectiveness of DSM programs. While Avista believes adoption of conservation is the best strategy for minimizing costs to customers and promoting a cleaner environment, this IRP shows a lower conservation potential than previous IRP's because of the relatively low avoided cost of natural gas. The IRP has many objectives, but foremost is to ensure that proper planning will enable

Executive Summary

Avista to continue delivering safe, reliable, and economic natural gas service to our customers.


## 1: Introduction

Avista is involved in the production, transmission and distribution of natural gas and electricity, as well as other energy-related businesses. Avista was founded in 1889 as Washington Water Power and has been providing reliable, efficient and competitively priced energy to customers for over 125 years.

Avista entered the natural gas business with the purchase of Spokane Natural Gas Company in 1958. In 1970, it expanded into natural gas storage with Washington Natural Gas (now Puget Sound Energy) and El Paso Natural Gas (its interest subsequently purchased by NWP) to develop the Jackson Prairie natural gas underground storage facility in Chehalis, Wash. In 1991, Avista added 63,000 customers with the acquisition of CP National Corporation's Oregon and California properties. Avista subsequently sold the California properties and its 18,000 South Lake Tahoe customers to Southwest Gas in 2005. Figure 1.1 shows where Avista currently provides natural gas service to approximately 325,000 customers in eastern Washington, northern Idaho and several communities in northeast and southwest Oregon. Figure 1.2 shows the number of natural gas customers by state.

**Figure 1.1: Avista Service Territory**

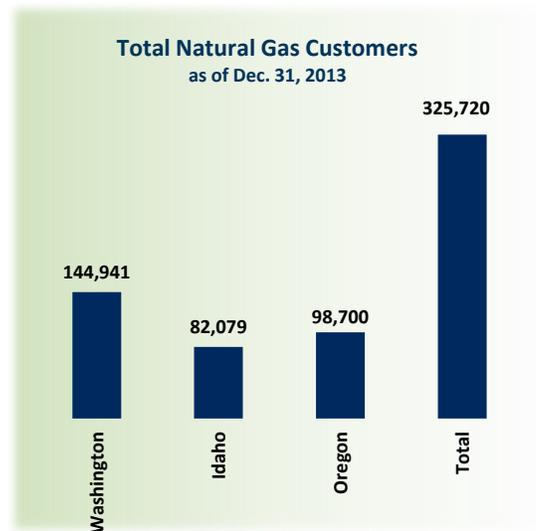

**Figure 1.2: Avista's Natural Gas Customer Counts**

Avista manages its natural gas operation through two operating divisions – North and South:

- The North Division covers about 26,000 square miles, primarily in eastern Washington and northern Idaho. Over 840,000 people live in Avista's Washington/Idaho service area. It includes urban areas, farms, timberlands, and the Coeur d'Alene mining district. Spokane is the largest metropolitan area with a regional population of approximately 470,000 followed by the Lewiston, Idaho/Clarkston, Washington and Coeur d'Alene, Idaho areas. The North Division has about 74 miles of natural gas distribution mains and 5,000 miles of distribution lines. The North Division receives natural gas at more than 40 points along interstate pipelines and distributes it to over 227,000 customers.
- The South Division serves four counties in southwest Oregon and one county in northeast Oregon. The combined population of these areas is over 480,000 residents. The South Division includes urban areas, farms and timberlands. The Medford, Ashland and Grants Pass areas, located in Jackson and Josephine Counties, is the largest single area served by Avista in this division with a regional population of approximately 290,000 residents. The South Division consists of about 67 miles of natural gas distribution mains and 2,000 miles of distribution lines. Avista receives natural gas at more than 20 points along interstate pipelines and distributes it to almost 96,000 customers.


## Customers

Avista provides natural gas services to “core” and “transportation-only” customer classes. Core or retail customers purchase natural gas directly from Avista with delivery to their home or business under a bundled rate. Core customers on firm rate schedules are entitled to receive any volume of gas they require. Some core customers are on interruptible rate schedules. These customers pay a lesser rate than firm customers since their service can be interrupted. Interruptible customers are not considered in peak day IRP planning.

Transportation-only customers purchase natural gas from third parties who deliver the purchased gas to our distribution system. Avista delivers this gas to their business charging a distribution rate only. Avista can interrupt the delivery service when following the priority of service tariff. The long-term resource planning exercise excludes transportation-only customers because they purchase their own gas and utilize their own interstate pipeline transportation contracts. However, distribution planning exercises include these customers.


Avista’s core or retail customers include residential, commercial and industrial categories. Most of Avista’s customers are residential, followed by commercial and relatively few industrial accounts (Figure 1.3).

**Figure 1.3 Firm Customer Mix**

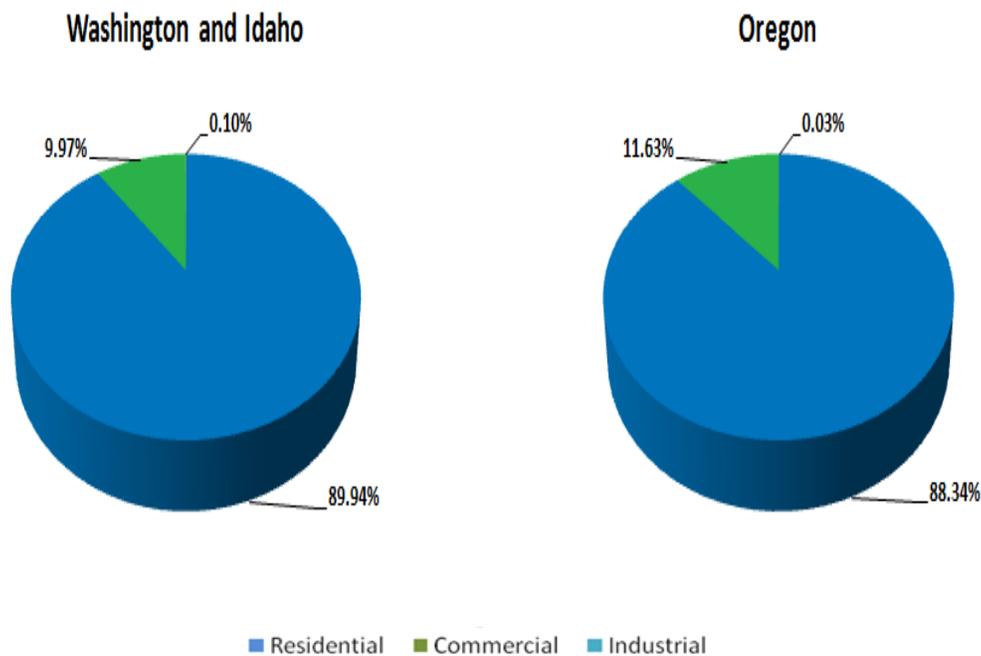


The mix is more balanced between residential and commercial accounts on an annual volume basis (Figure 1.4). Volume consumed by core industrial customers is not significant to the total, partly because most industrial customers in Avista's service territories are transportation-only customers.

**Figure 1.4 Therms by Class**

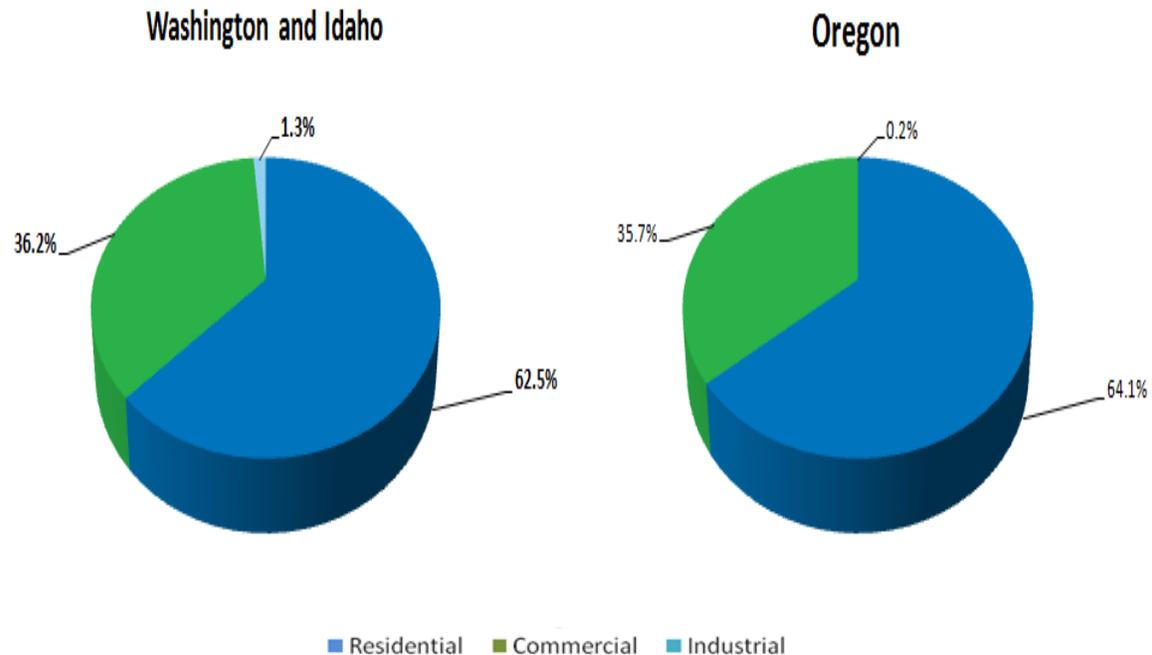

Core customer demand is seasonal, especially residential accounts in service territories with colder winters (Figure 1.5). Industrial demand, which is typically not weather sensitive, has very little seasonality. However, the La Grande service territory has several industrially classified agricultural processing facilities that produce a late summer seasonal demand spike.

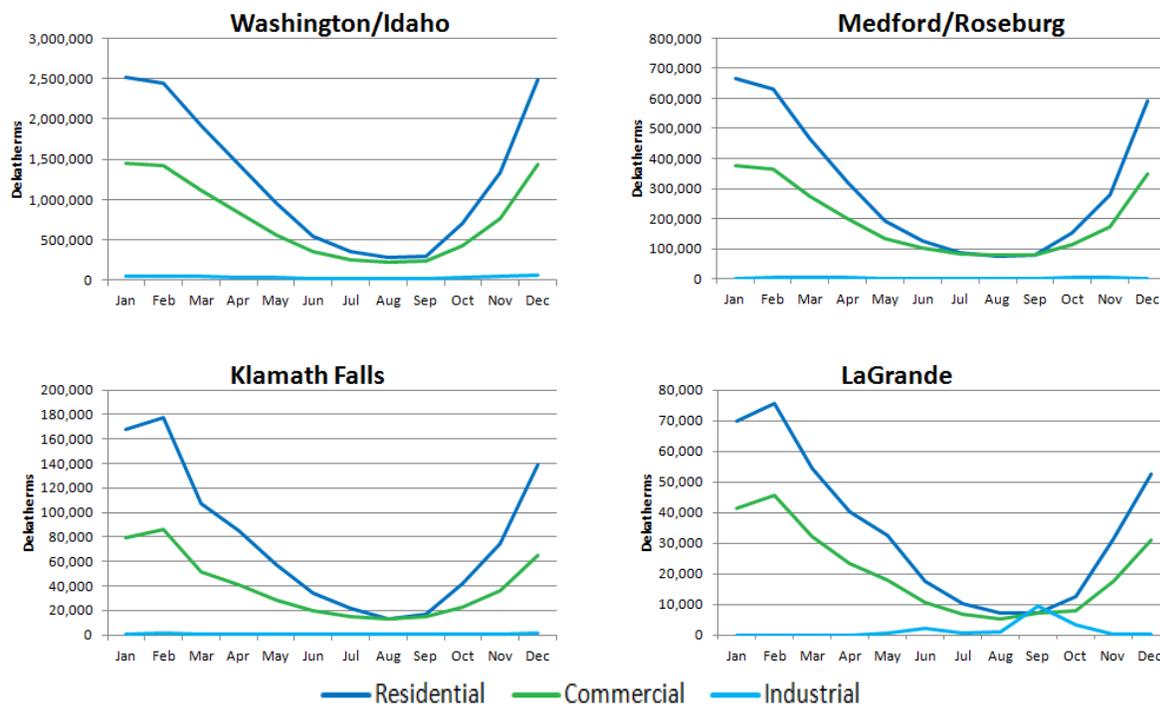**Figure 1.5: Customer Demand by Service Territory**

## Integrated Resource Planning

Avista's IRP involves a comprehensive analytical process to ensure that core firm customers receive long-term reliable natural gas service at a competitive price. The IRP includes evaluation, identification, and planning for the acquisition of an optimal combination of expected costs and associated risk of existing and future resources to meet average daily and peak-day demand delivery requirements over a 20-year planning horizon.

### Purpose of the IRP

Avista's 2014 Natural Gas IRP:

- Provides a comprehensive long-range planning tool.
- Fully integrates forecasted requirements with existing and potential resources.
- Determines the most cost-effective, risk-adjusted means for meeting future demand requirements.
- Responds to Washington, Idaho and Oregon rules, orders, and guidelines.

**Avista's IRP Process**

The IRP process considers:

- Customer growth and usage.
- Weather planning standard.
- DSM opportunities.
- Existing and potential supply-side resource options.
- Current and potential legislation/regulation.
- Risk.

**Public Participation**

Avista's TAC members play a key role and have a significant impact in development of the IRP. TAC members include Commission Staff, peer utilities, public interest groups, customers, academics, government agencies, and other interested parties. TAC members provide important input on modeling, planning assumptions, and the general direction of the process.

Avista sponsored four TAC meetings to facilitate stakeholder involvement in the 2014 IRP. The first meeting convened on January 24, 2014, and the last meeting occurred on April 23, 2014. Meetings are at a variety of locations convenient for stakeholders and are electronically available for those unable to attend in person. Each meeting included a broad spectrum of stakeholders. The meetings focused on specific planning topics, reviewing the progress of planning activities, and soliciting input on IRP development. TAC members received a draft of this IRP on May 30, 2014, for their review. Avista addressed the comments and concerns about that draft, and they enhanced this document. Avista appreciates all of the time and effort TAC members gave to the IRP process; they provided valuable input through their participation in the TAC process.

Preparation of the IRP is a coordinated endeavor by several departments within Avista with involvement and guidance from management. We are grateful for their efforts and contributions.

**Regulatory Requirements**

Avista submits an IRP to the public utility commissions in Idaho, Oregon and Washington on or before August 31 every two years as required by state regulation.<sup>1</sup> There is a statutory obligation to provide reliable natural gas service to customers at rates, terms and conditions that are fair, just, reasonable and sufficient. Avista regards

---

<sup>1</sup> The Washington IRP requirements are in WAC 480-90-238 on Integrated Resource Planning. Case No. GNR-G-93-2, Order No. 25342 outlines the Idaho IRP requirements. Order Nos. 07-002, 07-047 and 08-339 outline the Oregon IRP requirements. Appendix 2.2 provides details of these requirements and how this IRP meets those requirements.

the IRP as a means for identifying and evaluating potential resource options and as a process to establish an Action Plan for resource decisions. Ongoing investigation, analysis and research may cause Avista to determine that alternative resources are more cost effective than resources reviewed and selected in this IRP. Avista will continue to review and refine our understanding of resource options and will act to secure these risk-adjusted, least-cost options when appropriate.

## Planning Model

Consistent with prior IRPs, Avista used the SENDOUT® planning model to perform comprehensive natural gas supply planning and analysis for this IRP. SENDOUT® is a linear programming-based model that is widely used to solve natural gas supply, storage and transportation optimization problems. This model uses present value revenue requirement (PVRR) methodology to perform least-cost optimization based on daily, monthly, seasonal and annual assumptions related to the following:

- Customer growth and customer natural gas usage to form demand forecasts.
- Existing and potential transportation and storage options.
- Existing and potential natural gas supply availability and pricing.
- Revenue requirements on all new asset additions.
- Weather assumptions.
- Demand-Side management.

Avista incorporated stochastic modeling by utilizing a SENDOUT® module to simulate weather and price uncertainty. The module generates Monte Carlo weather and price simulations, running concurrently to account for events and to provide a probability distribution of results that aid resource decisions. Some examples of the types of stochastic analysis provided include:

- Price and weather probability distributions.
- Probability distributions of costs (i.e. system costs, storage costs, commodity costs).
- Resource mix (optimally sizing a contract or asset level of competing resources).

These computer-based planning tools were used to develop the 20-year best cost/risk resource portfolio plan to serve customers.

## Planning Environment

Even though Avista publishes an IRP biannually, the process is ongoing with new information and developments. In normal circumstances, the process can become complex as underlying assumptions evolve, impacting previously completed analyses. Every planning cycle has challenges and uncertainties; this cycle was no different. For example, the recession greatly impacted Avista's forecasted demand growth and has significantly reduced long-term natural gas needs. Widespread agreement on the availability of shale gas and the ability to produce it at lower prices has increased interest in the use of natural gas for LNG exports and for more transportation and industrial uses. However, there is uncertainty about the timing and size of those markets.

## IRP Planning Strategy

Planning for an uncertain future requires robust analysis that encompasses a wide range of possibilities. Avista has determined that the planning approach needs to:

- Recognize that historical trends may be fundamentally altered.
- Critically review all assumptions.
- Stress test assumptions via sensitivity analysis.
- Pursue a spectrum of possible scenarios.
- Develop a flexible analytical framework to accommodate changes.
- Maintain a long-term perspective.

With these objectives in mind, Avista developed a strategy encompassing all required planning criteria. This produced a complete IRP that effectively analyzes risks and resource options, which sufficiently ensures customers will receive safe and reliable energy delivery services with the best-risk, lease-cost, long-term solutions.

## Summary of changes from the 2012 IRP

Chapter	Issue	2014 Natural Gas IRP	2012 Natural Gas IRP
Demand	Expected Customer Growth	Expected Case customer growth is 1% compounded annually.	Expected Case customer growth of 1.8% compounded annually.
	High/Low Growth	High and low growth based on forecasted long run employment growth.	Based on Washington State Office of Financial Management, 40% below and 60% above expected growth.
	Price Elasticity	Utilized a -0.15 response based on multiple historic analysis. Incorporated mechanism to	Utilized a -0.13 response based on AGA survey. Applied to change year-over-

## Chapter 1: Introduction

		represent existing rate mechanisms that shield customers from timely price signals (i.e. comfort level billing, PGA mechanisms, deferrals, etc.)	year on commodity price.
	Weather	Rolling 20-year average with no adjustment for global warming.	Rolling 30-year average with an adjustment for global warming.
<b>Demand Side Management</b>	SENDOUT® modeling methodology	Integrated by price. SENDOUT® will be run without DSM and the resulting avoided costs will be calculated. Those costs will be given to ENERNOC to determine cost effective programs and savings. Resultant savings and costs will be incorporated into SENDOUT® and avoided costs will be re-evaluated until there is not a material change.	Utilized SENDOUT® DSM module, aggregated program bundles by demand area and type. Modeling at this level can mask individual cost effectiveness of programs and results in more DSM selected than might otherwise be selected.
<b>Environmental Issues</b>	Carbon Dioxide Emission (Carbon)	Three sensitivities on level of carbon tax (\$/ton) were compared. The base carbon case is the medium case. The high and low cases help bracket the base case results.	Analyzed one carbon sensitivity case.
<b>Supply Side Resources</b>	Spokane Supply	Increased the amount of supply available to take from GTN onto NWP to serve WA/ID that was not included in the 2012 IRP.	Resource not included in this IRP.
	Resource Deficiency	Not resource deficient in the Expected Case.	Resource deficient in 2029 in Oregon and 2030 in Washington and Idaho in the Expected Case.
	Supply Side Scenarios	The only case that identifies a resource deficiency is the High Growth/Low Price scenario. Avista utilized only the existing resource scenario and existing plus expected available resource scenario for modeling purposes.	Evaluated three supply side scenarios on cases with resource deficiencies. Existing resources, Existing plus Expected Available, and GTN fully subscribed.

Chapter 1: Introduction

## 2: Demand Forecasts

### Overview

The integrated resource planning process begins with the development of forecasted demand. Understanding and analyzing key demand drivers and their potential impact on forecasts is vital to the planning process. Utilization of historical data provides a reliable baseline, however past trends may not be indicative of future trends. This IRP mitigates the uncertainty by considering a range of scenarios to evaluate and prepare for a broad spectrum of outcomes.

### Demand Areas

Avista defined eight demand areas, structured around the pipeline transportation resources that serve them, within the SENDOUT® model (Table 2.1). These demand areas are aggregated into four service territories and further summarized into two divisions for presentation throughout this IRP.

**Table 2.1 Geographic Demand Classifications**

Demand Area	Service Territory	Division
Spokane NWP	Washington/Idaho	North
Spokane GTN	Washington/Idaho	North
Spokane Both	Washington/Idaho	North
Medford NWP	Medford/Roseburg	South
Medford GTN	Medford/Roseburg	South
Roseburg	Medford/Roseburg	South
Klamath Falls	Klamath Falls	South
La Grande	La Grande	South

### Demand Forecast Methodology

Avista uses the IRP process to develop two types of demand forecasts – “annual” and “peak day.” Annual average demand forecasts are useful for several purposes, including preparing revenue budgets, developing natural gas procurement plans, and preparing purchased gas adjustment filings. Peak day demand forecasts are critical for

## Chapter 2: Demand Forecasts

determining the adequacy of existing resources or the timing for acquiring new resources to meet customers' natural gas needs in extreme weather conditions.

In general, if existing resources are sufficient to meet peak day demand, they will be sufficient to meet annual average day demand. Developing annual average demand first and evaluating it against existing resources is an important step in understanding the performance of the portfolio under normal circumstances. It also facilitates synchronization of modeling processes and assumptions for all planning purposes.

Peak weather analysis aids in assessing not only resource adequacy, but differences, if any, in resource utilization. For example, storage may be dispatched differently under peak weather scenarios.

## Demand Modeling Equation

Because natural gas demand can vary widely from day-to-day, especially in winter months when heating demand is at its highest, developing daily demand forecasts is essential. In its most basic form, natural gas demand is a function of customer base usage (non-weather sensitive usage) plus customer weather sensitive usage. Basic demand takes the formula in Table 2.2:

**Table 2.2: Basic Demand Formula**

# of customers x Daily <b>base usage</b> / customer
<b>Plus</b>
# of customers x Daily <b>weather sensitive</b> usage / customer

SENDOUT® requires inputs as expressed in the Table 2.3 format to compute daily demand in dekatherms (Dth):

**Table 2.3: SENDOUT® Demand Formula**

# of customers x Daily <b>Dth base usage</b> / customer
<b>Plus</b>
# of customers x Daily Dth <b>weather sensitive</b> usage / customer x # of daiy degree days

## Chapter 2: Demand Forecasts

SENDOUT® performs this calculation daily for each customer class and each demand area. The base and weather sensitive usage (heating degree day usage) factors use customer demand coefficients developed outside the SENDOUT® model, and the coefficients capture a variety of demand usage assumptions. This is discussed in more detail in the Use-per-Customer Forecast section below. The number of daily degree days is simply heating degree days (HDDs), which are further discussed in the Weather Forecast section later in this chapter.

## Customer Forecasts


Avista's customer base includes residential, commercial and industrial categories. For each of the customer categories, Avista develops customer forecasts incorporating national economic forecasts and then drilling down into regional economies. U.S. GDP growth, U.S. and regional employment growth, and regional population growth expectations are key drivers in regional economic forecasts and are useful in estimating the number of natural gas customers. A detailed description of the customer forecast is found in Appendix 2.1. Avista combines this data with local knowledge about sub-regional construction activity, age and other demographic trends, and historical data to develop the 20-year customer forecasts.

Several departments within Avista use these forecasts, but Finance, Accounting, Rates, and Gas Supply are the primary users of these forecasts. Additionally, the distribution engineering group utilizes the forecast data for system optimization and planning purposes (see further discussion in Chapter 7 – Distribution Planning).

Forecasting customer growth is an inexact science, so it is important to consider alternative forecasts. Two alternative growth forecasts were developed for consideration in this IRP. Avista developed High and Low growth forecasts to provide potential paths and test resource adequacy. Appendix 2.1 contains a description of how these alternatives were developed.


Figure 2.1 shows these three customer growth forecasts. Due to a change in forecasting customer growth, the expected case customer counts are lower than the last IRP. This has impacted forecasted demand from both an average and peak day perspective. Detailed customer count data by region and class for all three scenarios is in Appendix 2.2.

**Figure 2.1: Customer Growth Scenarios**

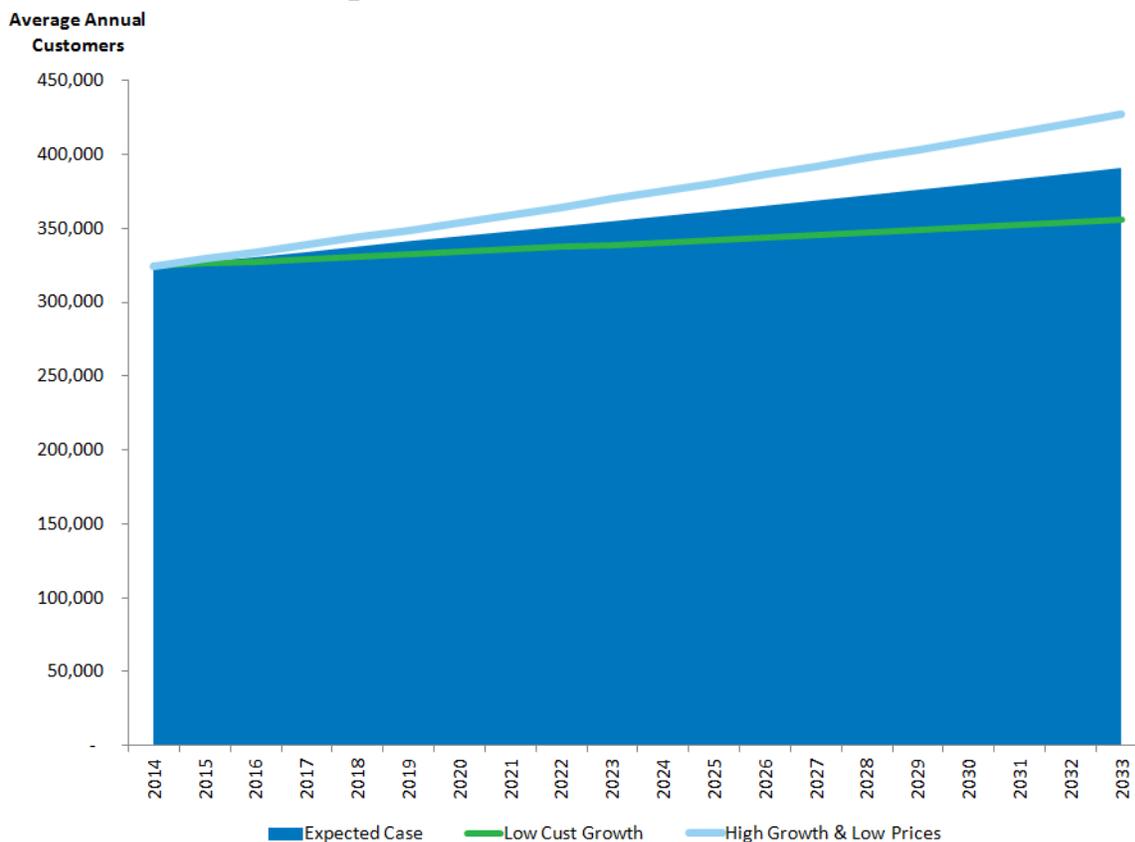

**Use-per-Customer Forecast**


The goal for a use-per-customer forecast is to develop base and weather sensitive demand coefficients that can be combined and applied to HDD weather parameters to reflect average use per customer. This produces a reliable forecast because of the high correlation between usage and temperature as depicted in the example scatter plot in Figure 2.2.

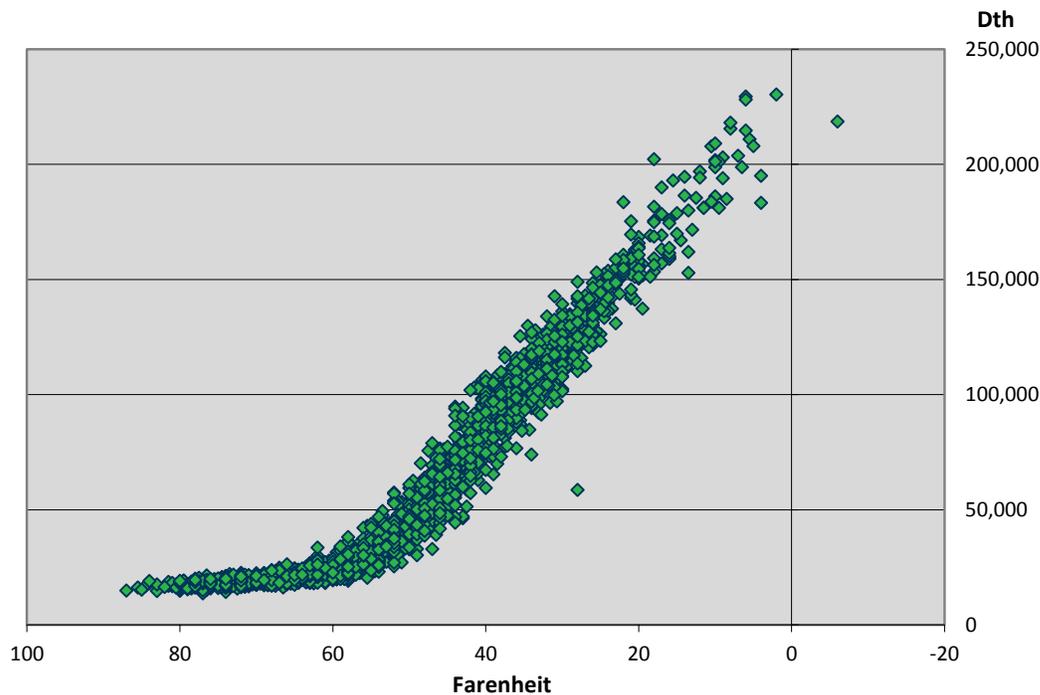**Figure 2.2: Example Demand vs. Average Temperature – WA/ID**

The first step in developing demand coefficients was gathering daily historical gas flow data for all of Avista’s city gates. The use of city gate data over revenue data is due to the tight correlation between weather and demand. The revenue system does not capture data on a daily basis and, therefore, makes a statistical analysis with tight correlations on a daily basis virtually impossible. Avista reconciles city gate flow data to revenue data to ensure that total demand is properly captured.

The historical city gate data was gathered, sorted by service territory/temperature zone, and then by month. As in the last IRP, Avista used three years of historical data to derive the use-per-customer coefficients, but also considered varying the number of years of historical data. When comparing five years of historical use-per-customer to the three years of data, the five-year data had slightly lower use-per-customer, which may understate use as the economy moderately recovers and customers’ usage patterns return to pre-recession patterns. Three years struck a balance between historical and current customer usage patterns. Figure 2.3 illustrates the annual demand differences between the three and five-year use-per-customer with normal and peak weather conditions.

## Chapter 2: Demand Forecasts

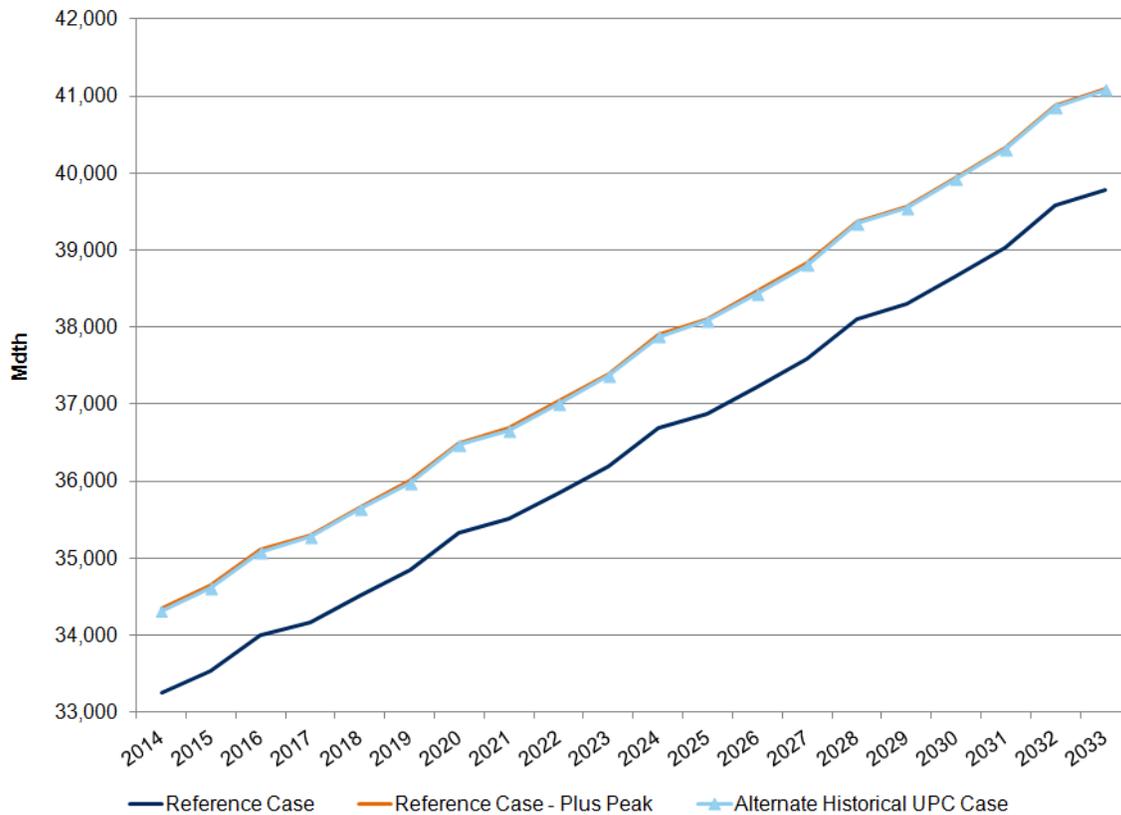**Figure 2.3: Annual Demand – Demand Sensitivities 3-Year vs. 5-Year Use-per-Customer**

The base usage calculation used three years of July data to derive coefficients. Average usage in these months divided by the average number of customers provides the base usage coefficient input into SENDOUT®. This calculation is done for each area and customer class based on customer billing data demand ratios.

To derive weather sensitive demand coefficients for each monthly data subset, Avista removed base demand from the total and plotted usage by HDD in a scatter plot chart to verify correlation visually. The process included the application of a linear regression to the data by month to capture the linear relationship of usage to HDD. The slopes of the resulting lines are the monthly weather sensitive demand coefficients input into SENDOUT®. Again, this calculation is done by area and by customer class using allocations based on customer billing data demand ratios.

In extreme weather conditions, demand can begin to flatten out relative to the linear relationships at less extreme temperatures. This occurs, for example, when furnaces reach maximum output and do not consume any more natural gas, regardless of how

## Chapter 2: Demand Forecasts

much colder temperatures get. Avista sought to capture this phenomenon through development of super peak coefficients.

The methodology for deriving super peak coefficients was derived by averaging the heat coefficients for December, January and February. One inherent drawback to this methodology is the lack of sufficient data points to develop a strong linear relationship. Avista will continue to test this theory and monitor trends as described in Chapter 8 - Ongoing Activities.

As a final step, coefficient reasonableness was checked by applying the coefficients to actual customer count and weather data to backcast demand. This was compared to actual demand with satisfactory results.

## **Weather Forecast**

The last input in the demand modeling equation is weather (specifically HDDs). This started with the most current 20 years of daily weather data from the National Oceanic Atmospheric Administration (NOAA), converted to HDDs, and used to compute an average for each day to develop the weather forecast. The Oregon weather input used four weather stations, corresponding to the areas where Avista provides natural gas services. HDD weather patterns between these areas are uncorrelated. Weather data for the Spokane Airport is used for the eastern Washington and northern Idaho portions of the service area, as HDD weather patterns within that region are correlated.

The NOAA 20-year average weather serves as the base weather forecast to prepare the annual average demand forecast. The peak day demand forecast includes adjustments to average weather to reflect a five-day cold weather event. This consists of adjusting the middle day of the five-day cold weather event to the coldest temperature on record for a service territory, as well as adjusting the two days on either side of the coldest day to temperatures slightly warmer than the coldest day. For the Washington/Idaho and La Grande service territories, the model assumes this event on and around February 15 each year. For the southwestern Oregon service territories (Medford, Roseburg, Klamath Falls), the model assumes this event on and around December 20 each year.

The following section provides details about the coldest days on record for each service territory.

The Washington/Idaho service areas coldest day on record was an 82 HDD for Spokane and occurred on Dec. 30, 1968. This is equal to an average daily temperature of -17 degrees Fahrenheit. Only one 82 HDD has been experienced in the last 40 years

## Chapter 2: Demand Forecasts

for this area; however, within that same time period, 80, 79 and 74 HDD events occurred on Dec. 29, 1968, Dec. 31, 1978 and Jan. 5, 2004, respectively.

Medford experienced the coldest day on record, a 61 HDD, on Dec. 9, 1972. This is equal to an average daily temperature of 4 degrees Fahrenheit. Medford has experienced only one 61 HDD in the last 40 years; however, it has also experienced 59 and 58 HDD events on Dec. 8, 1972 and Dec. 21, 1990, respectively.

The other three areas in Oregon have similar weather data. For Klamath Falls, a 72 HDD occurred on Dec. 8, 2013; in La Grande a 74 HDD occurred on Dec. 23, 1983; and a 55 HDD occurred in Roseburg on Dec. 22, 1990. As with Washington/Idaho and Medford, these days are the peak day weather standard for modeling purposes.

Utilizing a peak planning standard of the coldest temperature on record may seem aggressive given a temperature experienced rarely, or only once. Given the potential impacts of an extreme weather event on customers' personal safety and property damage to customer appliances and Avista's infrastructure, it is a prudent planning standard. While remote, peak days do occur, as on Dec. 8, 2014, when Avista matched the previous peak HDD in Klamath Falls.

Avista analyzes an alternate planning standard using the coldest temperature in the last twenty years the Washington/Idaho service area uses a 76 HDD, which is equal to an average daily temperature of -11 degrees Fahrenheit. In Medford, the coldest day in 20 years is a 54 HDD, equivalent to a temperature of 11 degrees Fahrenheit. In Roseburg, the coldest day in 20 years is a 48 HDD, equivalent to a temperature of 17 degrees Fahrenheit. In Klamath Falls, the coldest day in 20 years is a 72 HDD, equivalent to a temperature of -7 degree Fahrenheit. In La Grande, the coldest day in 20 years is a 64 HDD, equivalent to a temperature of 1 degree Fahrenheit.

The HDDs by area, class and day entered into SENDOUT® are in Appendix 2.4.

## Global Warming

In previous IRP's, an adjustment has been made to NOAA weather data to incorporate estimates for global warming. This adjustment was based on analysis of historical weather data in each of the areas served. In this IRP, Avista moved away from adjusting the weather data in favor of moving from a rolling 30-year average to a 20-year average.

Avista chose a 20-year average for several reasons. First, NASA climate studies indicate that the distribution of temperatures in North America began to shift upwards

## Chapter 2: Demand Forecasts

significantly about 20 years ago.<sup>1</sup> In this case, a 20-year average coincides with the period when the temperature shift occurred. Second, there is a tradeoff between the length of the normal weather definition and its volatility.<sup>2</sup> For example, although a 10-year moving average captures turning points in climate trends more quickly than 15, 20 or 30-year averages, it will do so at the cost of larger year-to-year changes in the measurement of normal weather. That is, short-term weather variations not necessarily related to climate change will play a larger role in the defining normal weather as the number of years used for calculating the moving average declines. This can lead to excessive forecast volatility for each update to the 10-year average. In this respect, the 20-year average is a compromise between the traditional 30-year average, which may not capture climate trends, and the 10-year average, which greatly increases the volatility of year-to-year normal weather.

Avista was unable to find any definitive evidence to support a peak day warming trend. After discussion with the TAC, Avista decided to discontinue global warming trend adjustments to the peak day weather events in the HDD forecast. Therefore, the modeling and analysis with respect to peak day planning is unaffected by global warming.

### Developing a Reference Case

To adjust for uncertainty, Avista developed a dynamic demand forecasting methodology that is flexible to changing assumptions. To understand how various alternative assumptions influence forecasted demand Avista needed a reference point for comparative analysis. For this, Avista defined the reference case demand forecast shown in Figure 2.4. This case is only a starting point to compare other cases.

---

<sup>1</sup> See Hansen, J.; M. Sato; and R. Ruedy, "Global Temperature Update Through 2012," *Science Summary of NASA's 2012 Temperature Summary* January 2013, <http://www.nasa.gov/topics/earth/features/2012-temps.html>

<sup>2</sup> For a detailed discussion of this issue, see Livezey, R. E., and P. Q. Hanser, "Redefining Normal Temperatures: Resource Planning and Forecasting in a Changing Environment," *Public Utilities Fortnightly*, May 2013, 151(5), pp. 28-33,56.

**Figure 2.4: Reference Case Assumptions****1. Customer Annual Average Growth Rates**

Area	Residential	Commercial	Industrial
Washington - Idaho	1.0%	1.0%	-0.53%
Klamath Falls	0.66%	0.66%	0.0%
LaGrande	0.40%	0.40%	0.0%
Medford	1.1%	1.1%	0.0%
Roseburg	0.8%	0.02%	0.0%

**2. Use Per Customer Coefficients**

Flat Across All Classes

3-year Average Use per Customer per HDD by Area/Class

**3. Weather**

20-year Normal - NOAA (1994-2013)

**4. Elasticity**

None

**5. Demand Side Management**

None


## Dynamic Demand Methodology

The dynamic demand planning strategy examines a range of potential outcomes. The approach consists of:

- Identifying key demand drivers behind natural gas consumption.
- Performing sensitivity analysis on each demand driver.
- Combining demand drivers under various scenarios to develop alternative potential outcomes for forecasted demand.
- Matching demand scenarios with supply scenarios to identify unserved demand.

Figure 2.5 represents our methodology of starting with sensitivities, progressing to scenarios, and ultimately creating portfolios.

Figure 2.5: Sensitivities, Scenarios and Portfolios

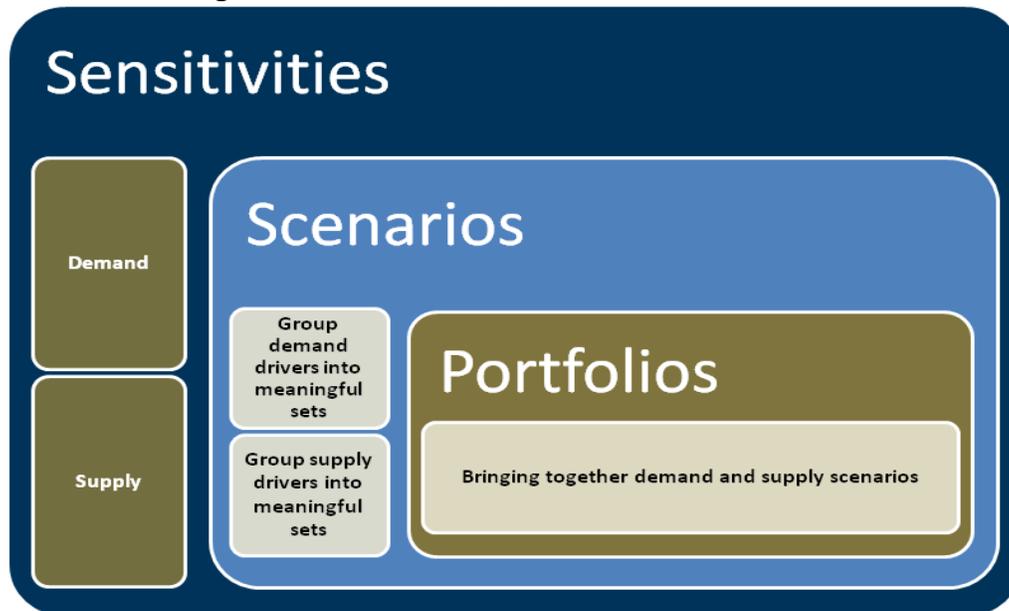

## Sensitivity Analysis

In analyzing demand drivers, Avista grouped them into two categories based on:

- Demand Influencing Factors directly influencing the volume of natural gas consumed by core customers.
- Price Influencing Factors indirectly influencing the volume of natural gas consumed by core customers through a price elasticity response.

After identifying demand and price influencing factors, Avista developed sensitivities to focus on the analysis of a specific natural gas demand driver and its impact on forecasted demand relative to the Reference Case when modifying the underlying input assumptions.

Sensitivity assumptions reflect incremental adjustments not captured in the underlying Reference Case forecast. Avista analyzed 17 demand sensitivities to determine the results relative to the reference case. Table 2.4 lists these sensitivities. Detailed information about these sensitivities is in Appendix 3.6.


Chapter 2: Demand Forecasts

**Table 2.4: Demand Sensitivities**

Scenario	Influence	Weather	Growth	Use per Customer	Price Curve	Carbon Adder	LNG Adder	DSM	New Markets	Elasticity
Reference Case	Direct	Normal	Expected	3 year	Expected	No	No	No	No	No
Reference Case plus Peak Weather	Direct	Peak	Expected	3 year	Expected	No	No	No	No	No
High Growth Case	Direct	Peak	High	3 year	Expected	No	No	No	No	No
Low Growth Case	Direct	Peak	Low	3 year	Expected	No	No	No	No	No
Alternate Use per Customer	Direct	Peak	Expected	5 year	Expected	No	No	No	No	No
New Markets Case	Direct	Peak	Expected	3 year	Expected	No	No	No	Yes	No
DSM	Direct	Normal	Expected	3 year	Expected	No	No	No	No	No
Peak plus DSM	Direct	Peak	Expected	3 year	Expected	No	No	Yes	No	No
Alternate Weather Planning Standard	Direct	Coldest in 20	Expected	3 year	Expected	No	No	Yes	No	No
Expected Elasticity	Indirect	Peak	Expected	3 year	Expected	No	No	No	No	Yes
Low Price	Indirect	Peak	Expected	3 year	Low	No	No	No	No	No
High Price	Indirect	Peak	Expected	3 year	High	No	No	No	No	No
Carbon Legislation - Low	Indirect	Peak	Expected	3 year	Expected	Yes	No	No	No	No
Carbon Legislation - Medium	Indirect	Peak	Expected	3 year	Expected	Yes	No	No	No	No
Carbon Legislation - High	Indirect	Peak	Expected	3 year	Expected	Yes	No	No	No	No
Exported LNG	Indirect	Peak	Expected	3 year	Expected	No	Yes	No	No	No

Figure 2.6 shows the annual demand from each of the sensitivities modeled for this IRP.

**Figure 2.6: 2014 IRP Demand Sensitivities**

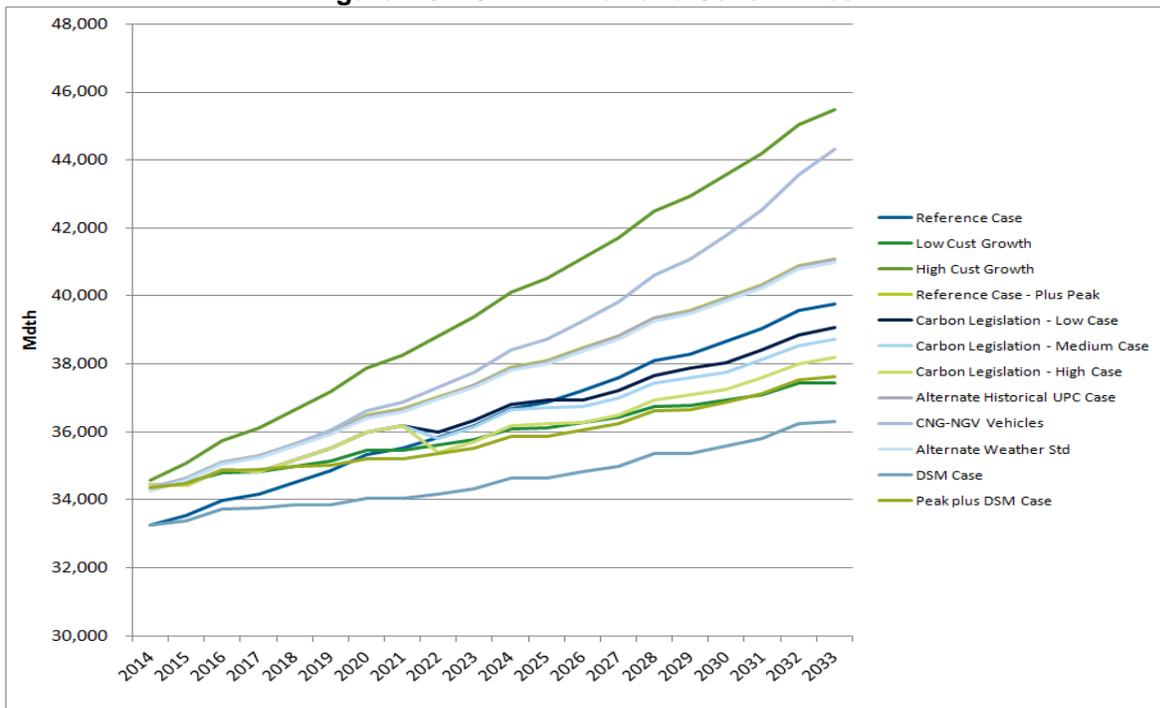

**Scenario Analysis**

After testing the sensitivities, Avista grouped them into meaningful combinations of demand drivers to develop demand forecasts representing scenarios. Table 2.5

## Chapter 2: Demand Forecasts

identifies the scenarios developed. The Average Demand Case represents the case used for normal planning purposes, such as corporate budgeting, procurement planning, and PGA/General Rate Cases. The Expected Case reflects the demand forecast Avista believes is most likely given peak weather conditions. The High Growth/Low Price and Low Growth/High Price cases represent a range of possibilities for customer growth and future prices. The Alternate Weather Standard case utilizes the coldest day in Avista’s service territories in the last 20 years. Each of these scenarios provides a “what if” analysis given the volatile nature of key assumptions, including weather and price. Appendix 2.6 lists the specific assumptions within the scenarios while Appendix 2.7 contains a detailed description of each scenario.

**Table 2.5: Demand Scenarios**

<b>2014 IRP Demand Scenarios</b>
<b>Average Case</b>
<b>Expected Case</b>
<b>High Growth, Low Price</b>
<b>Low Growth, High Price</b>
<b>Alternate Weather Standard</b>

## Price Elasticity

The economic theory of price elasticity states that the quantity demanded for a good or service will change with its price. Price elasticity is a numerical factor that identifies the relationship of a consumer’s consumption change in response to a price change. Typically, the factor is a negative number as consumers normally reduce their consumption in response to higher prices or will increase their consumption in response to lower prices. For example, a price elasticity factor of negative 0.15 for a particular good or service means a 10 percent price increase will prompt a 1.5 percent consumption decrease and a 10 percent price decrease will prompt a 1.5 percent consumption increase.

Complex relationships influence price elasticity and given the current economic environment, Avista questions whether current behavior will become normal or if customers will return to historic usage patterns. Furthermore, complex regulatory pricing mechanisms shield customers from price volatility, thereby dampening price signals and affecting price elastic responses. For example, budget billing averages a customer’s bills into equal payments throughout the year. This popular program helps customers

## Chapter 2: Demand Forecasts

manage household budgets, but does not send a timely price signal. Additionally, natural gas cost adjustments, such as the Purchased Gas Adjustment (PGA), annually adjusts the commodity cost which shields customers from daily gas price volatility. These mechanisms do not completely remove price signals, but they can significantly dampen the potential demand impact.

When considering a variety of studies on energy price elasticity, a range of potential outcomes was identified, including the existence of positive price elastic adjustments to demand. One study looking at the regional differences in price elasticity of demand for energy found that the statistical significance of price becomes more uncertain as the geographic area of measurement shrinks.<sup>3</sup> This is particularly important given Avista's geographically diverse and relatively small service territories.

Avista acknowledges changing price levels can and do influence natural gas usage, so this IRP includes a price elasticity of demand factor of -0.15 into the modeling assumptions to allow use-per-customer to vary into the future as the natural gas price forecast changes.

Recent usage data indicates that even with declines in the retail rate for natural gas, long run use-per-customer continues to decline. This likely includes a confluence of factors including high unemployment, increased investments in energy efficiency measures, building code improvements, behavioral changes, and heightened focus of consumers' household budgets.

## Results

During 2014, the Average Case demand forecast indicates Avista will serve an average of 324,606 core natural gas customers with 33,343,423 dekatherms of natural gas. By 2033, Avista projects 391,203 core natural gas customers with an annual demand of over 38,069,627 dekatherms. In Washington/Idaho, the projected number of customers increases at an average annual rate of 0.99 percent with demand growing at a compounded average annual rate of 1.03 percent. In Oregon, the projected number of customers increases at an average annual rate of 1.7percent, with demand growing 1.3 percent per year.

During 2014, the Expected Case demand forecast indicates Avista will serve an average of 324,606 core natural gas customers with 34,095,766 dekatherms of natural gas. By 2033, Avista projects 391,203 core natural gas customers with an annual demand of over 38,889,977 dekatherms.

---

<sup>3</sup> Bernstein, M.A. and J. Griffin (2005). Regional Differences in Price-Elasticity of Demand for Energy, Rand Corporation.

Figure 2.7 shows system forecasted demand for the demand scenarios on an average daily basis for each year.<sup>4</sup>

**Figure 2.7: Average Daily Demand – 2014 IRP Scenarios**

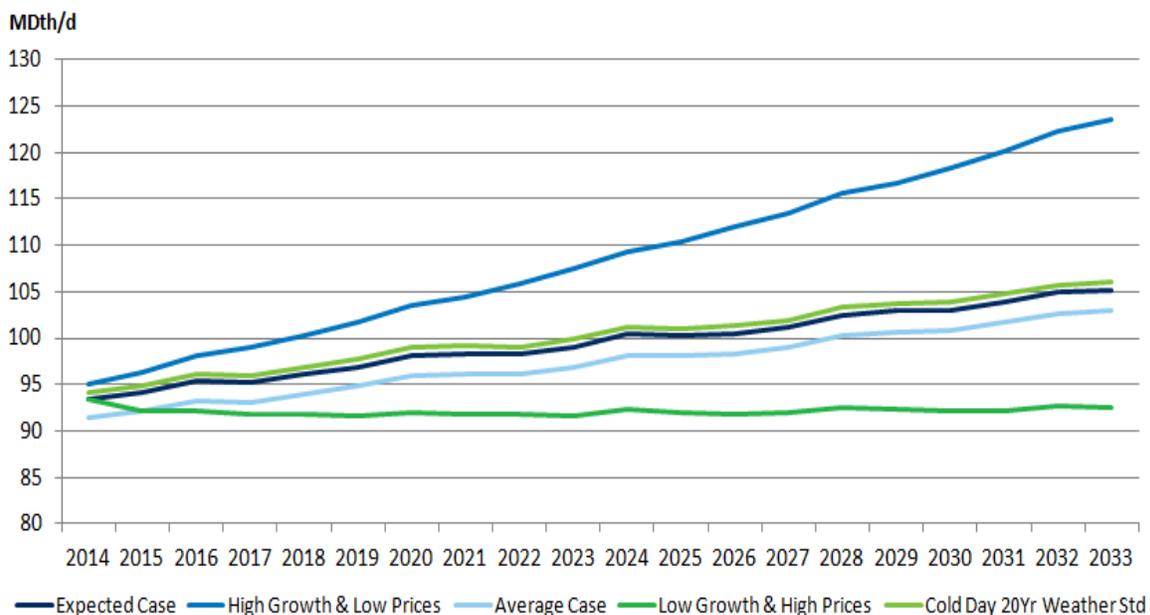
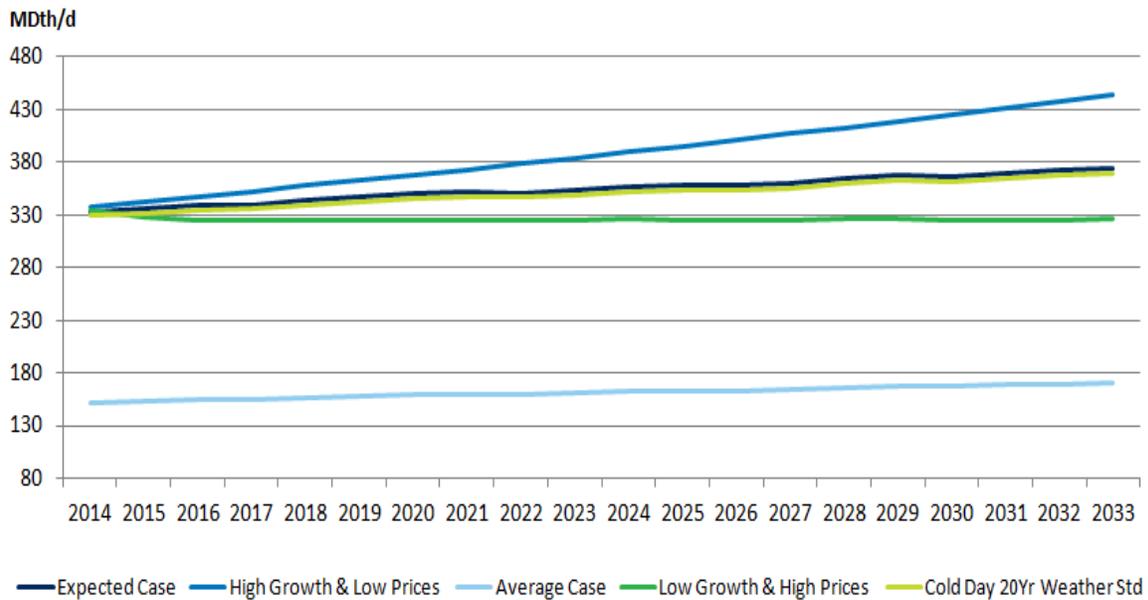


Figure 2.8 shows system forecasted demand for the Expected, High and Low Demand cases on a peak day basis for each year relative to the Average case average daily winter demand. Detailed data for all demand scenarios is in Appendix 2.8.

<sup>4</sup> Appendix 3.9 shows gross demand, DSM savings and net demand.

**Figure 2.8: February 15th – Peak Day – 2014 IRP Demand Scenarios**

The purpose of the IRP is to balance forecasted demand with existing and new supply alternatives. Since new supply sources include conservation resources, which act as a demand reduction, the demand forecasts prepared and described in this section include existing efficiency standards and normal market acceptance levels. The methodology for modeling DSM initiatives is in Chapter 3 – Demand-Side Resources.

## Alternative Forecasting Methodologies

There are many forecasting methods available and used throughout different industries. Avista strives to use methods that enhance forecast accuracy, facilitate meaningful variance analysis, and allows for modeling flexibility to incorporate different assumptions. Avista believes the statistical methodology to be sound and provides a robust range of demand considerations. The methodology allows for the analysis of different statistical inputs by considering both qualitative and quantitative factors. These factors can come from data, surveys of market information, fundamental forecasts, and industry experts. Avista is always open to new methods of forecasting natural gas demand and will continue to assess which, if any, alternative methodologies to include in the dynamic demand forecasting methodology.

## Chapter 2: Demand Forecasts

**Key Issues**

Demand forecasting is a critical component of the IRP requiring careful evaluation of the current methodology and use of sufficient scenario planning to understand how changes to the underlying assumptions will affect the results. The evolution of demand forecasting over recent years has been dramatic, causing a heightened focus on variance analysis and trend monitoring. Current techniques have provided sound forecasts with appropriate variance capabilities. However, Avista is mindful of the importance of the assumptions driving current forecasts and understands that these can and will change over time. Therefore, monitoring key assumptions driving the demand forecast is an ongoing effort that will be shared with the TAC as they develop.

**Price Elasticity**

Avista continues to study how to incorporate a price elastic response to demand given the complex cross commodity relationships, regulatory pricing mechanisms, flat forward price curve and changing technologies in energy efficiency that make discerning how much demand response to expect over the long term.

An action item from the previous IRP was to explore the possibility of a regional elasticity study facilitated by Avista in conjunction with a third-party such as the NWGA or the AGA. Avista approached the NWGA and they are willing to assess regional interest and facilitate the process. Avista is developing the scope, assessing who is best to conduct a study, and determining the associated costs. Avista will assess the interest level of regional stakeholders before deciding to proceed with the study.

**Flat Demand Risk**

Forecasting customer usage is a complex process because of the number of underlying assumptions and the relative uncertainty of future patterns of usage with a goal of increasing forecast accuracy. There are many factors that can be incorporated into these models, assessing which ones are significant and improving the accuracy are key. Avista continues to evaluate economic and non-economic drivers to determine which factors improve forecasting accuracy. The forecasting process will continue to review research on climate change and the best way to incorporate the results of that research into the forecasting process.

For the last few planning cycles, the TAC has discussed the changing slope of forecasted demand. Growth has slowed due to the recent recession and declining use-per-customer. This is primarily driven by energy efficiency and responses to higher

## Chapter 2: Demand Forecasts

commodity costs and general inflation. Use-per-customer seems to have stabilized, but customer growth in Avista's service territory may not return to pre-recession levels.

This reduced demand pushes the need for resources beyond the planning horizon, which means no new investment in resources is necessary. However, should assumptions about lower customer growth prove to be inaccurate and there is a rebound in demand, new resource needs will occur sooner than expected. Therefore, careful monitoring of demand trends in order to identify signposts of accelerated demand growth is critical to the identification of new resource needs coming earlier.

### **Emerging Natural Gas Demand**

The shale gas revolution has fundamentally changed the long-term availability and price of natural gas. This revolution prompts an evolution in the increased use of natural gas. From fertilizer plants to food processors, interest in industrial processes that use natural gas as a feedstock is growing. Another likely demand growth area is in the transportation sector; both land-based and marine fleets are turning to natural gas for their fuel supply due to its low price and better environmental footprint when compared to diesel. It remains to be seen if these new customers are served by an LDC, in all likelihood they will not be firm sales customers. , However, their demands will have an impact on regional supply which could trigger price movement.

### **Conclusion**

Recessionary impacts have significantly reduced Avista's outlook for customer growth and reduced the long-term demand forecasts. Avista's dynamic demand methodology provides a means to assess the individual and collective demand impact of a variety of economic and non-economic drivers. The results of this comprehensive analysis provides a better understanding of the possible outcomes with respect to core consumption of natural gas and helps drive resource decisions based on changing consumer needs.

## Chapter 3: Demand-Side Resources

### Overview

Avista is committed to offering natural gas DSM portfolios to residential, commercial and industrial customers when it is feasible to do so in a cost-effective manner as prescribed within each jurisdiction. In recent years, customers have benefitted from precipitous declines in natural gas avoided costs. At the same time, these falling avoided costs have made it more challenging to design a cost effective DSM portfolio as well as limiting the cost incentives that efficiency programs have with retail customers. The Avista continues to work with regulators and key external stakeholders on potential natural gas DSM opportunities to achieve a cost effective portfolio in each of its jurisdictions. Currently, the status of the Avista's natural gas DSM programs differs significantly in each of its three jurisdictions.

Avista manages the Washington and Idaho DSM programs, to the extent possible, as a single portfolio due to the geography and communications inherent within that portion of the service territory. Previous analysis, using the then-prevailing avoided cost that were more favorable to DSM resources, led Avista to the conclusion that it was not possible to field a Washington and Idaho natural gas DSM portfolio that would be cost-effective under the traditional Total Resource Cost (TRC) test. The TRC cost-benefit test is a measurement of the success that a portfolio has in reducing the customer's total energy cost for providing end-use services. As a result, in May 2012 Avista proposed revisions to its natural gas energy efficiency tariffs in Washington and Idaho that would have, if adopted as filed, suspended all incentives and direct marketing of natural gas efficiency programs. As happened with the Company's previous experience of suspending natural gas programs in 1997, Avista committed to reinstitute natural gas programs when and if natural gas avoided costs increased to a level sufficient to field a cost-effective portfolio. Due to the inability to offer a TRC cost-effective portfolio, in Idaho, Avista received approval for the suspension of the natural gas DSM portfolio.

The Washington Utilities and Transportation Commission responded to Avista's request to suspend its natural gas DSM portfolio by initiating a rulemaking proceeding.<sup>1</sup> After much discussion and process, at the direction of the Commission, the Company withdrew its filing and applied the Program Administrator Cost (PAC) test (also known as the Utility Cost Test) in place of the TRC test. The PAC cost-effectiveness test takes the perspective of managing only the customer's utility bill through efficiency programs

---

<sup>1</sup> Docket No. UG-121207 - The result of this rulemaking was a Policy Statement on the "Evaluation of the Cost-Effectiveness of Natural Gas Conservation Programs."

## Chapter 3: Demand-Side Resources

and not the customers total cost of energy. It does this by excluding from consideration the customer's incremental investment in purchasing efficiency beyond incentives paid by the utility. Since incentives are almost invariably only part of the incremental cost associated with efficiency measures, the restricted cost definition of the PAC test leads to higher benefit-to-cost ratios. Avista found it necessary to reduce financial incentives, but was able to design a DSM portfolio anticipated to be cost-effective under the more narrowly defined PAC test.

Avista's Oregon DSM portfolio is distinctly separate from the portfolios offered in the Washington and Idaho jurisdictions. In September of 2012, Avista filed to suspend certain programs and modify many others within its Oregon DSM portfolio for the same reasons it did so in Washington and Idaho. However, on April 30, 2013 the Oregon Public Utility Commission granted a two-year exception period for Avista to identify and implement strategies that could potentially have a significant impact on the cost-effectiveness of the DSM portfolio in a low avoided cost environment. Many of these strategies have been completed and more are in-progress with favorable impacts upon the cost-effectiveness performance to date.

### **Conservation Potential Assessment Methodology**


Avista engaged EnerNOC (now Applied Energy Group) to perform an independent evaluation of the technical, economic and achievable DSM potential within each of Avista's three jurisdictions over a 20-year planning horizon. This process involves indexing existing nationally recognized Conservation Potential Assessment (CPA) models to the Avista service territory load forecast, housing stock, end-use saturations and other key characteristics. Additional consideration of the impact of energy codes and appliance standards for end-use equipment at both the state and national level are incorporated into the projection of energy use and the baseline for the evaluation of efficiency options. The modeling process also utilizes ramp rates for the acquisition of efficiency resources over time in a manner generally consistent with the assumptions used by the Northwest Power Planning Council. This includes adjusted ramp rates to better align with Avista's recent program accomplishments and adjusted in the later years for some measures.

The process described above defines an Avista-specific supply curve for conservation resources. Simultaneously, the avoided cost of natural gas consistent with serving the full forecasted demand was defined as part of the SENDOUT® modeling of the Avista system. The preliminary cost-effective conservation potential is determined by applying the stream of annual natural gas avoided costs to the Avista-specific supply curve for conservation resources. This quantity of conservation acquisition is then decremented

## Chapter 3: Demand-Side Resources

from the load, which the utility must serve, and the SENDOUT® model run against the modified (reduced) load requirements. The resulting avoided costs are compared to those obtained from the previous iteration of SENDOUT® avoided costs. This reiteration process continues until the differential between the avoided cost streams of the most recent and the immediately previous iteration becomes immaterial. At that point both supply and demand side options are functioning from comparable (including a 10 percent preference for DSM resources) avoided costs and the resulting load is meeting all load requirements.

Figure 3.1 is a graphical depiction of the previously described methodology used in the presentation of this methodology to the TAC.

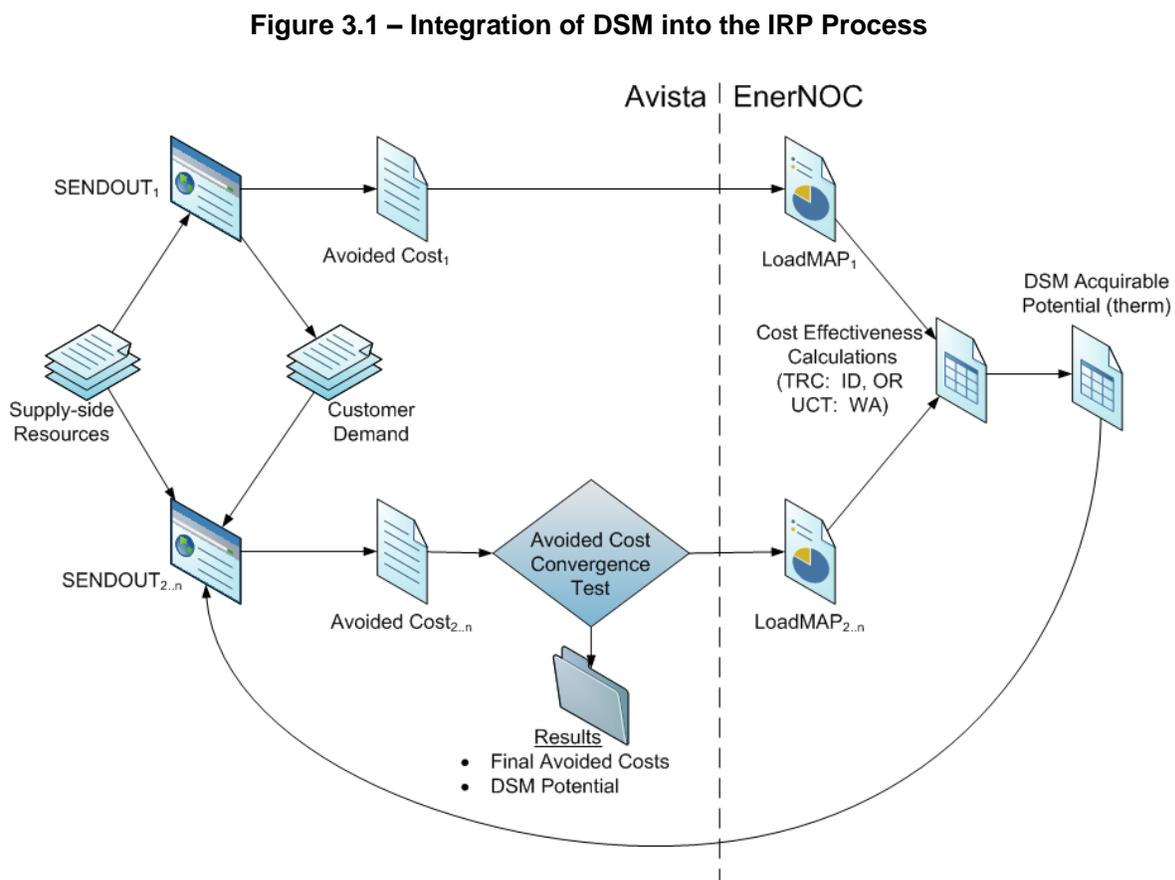

Integrating the DSM portfolio into the IRP process by equilibrating the avoided costs in this iterative process is useful since Avista's DSM acquisition is small relative to the total

## Chapter 3: Demand-Side Resources

western natural gas market used to establish the commodity prices driving the avoided cost stream. Therefore, few iterations are necessary to reach a stable avoided cost. Additionally it provides some assurance, at least at the aggregate level, that the quantity of DSM resource selected will be cost-effective when the final avoided cost stream is used in retrospective portfolio evaluation.

It should be noted that, based upon guidance provided by the Washington Commission, and as previously explained, the cost-effectiveness metric applied in developing the Washington DSM supply curve was the PAC test rather than the TRC test used in past IRP evaluations of Washington and continues to be used in the Idaho and Oregon jurisdictions. The PAC tests narrower definition of costs led to proportionately higher DSM acquisition targets within the Washington jurisdiction.

### **Environmental Externalities**

The gathering, transmission, distribution and end-use of natural gas involve some inherent environmental costs that are not necessarily borne by the parties to the transaction or the user of the resource. These costs are externalities since they represent those costs that are external to the parties involved in the transaction. It is difficult to quantify the value of these externalities since they are borne by individuals within society who may drastically differ on the value that they place on the absence of these impacts. Furthermore, there are no well-defined markets for measuring the economic impact of these externalities.

This IRP intends to consider the full cost of the resources acquired by the utility and used by customers in the resource selection process. Towards that end, Avista incorporates a DSM preference in recognition of the lower environmental externality cost incurred when efficiency resources meet customer end-use needs rather than supply resources. The CPA incorporates this preference by increasing the avoided cost used to determine if DSM resources are within 10 percent of being cost-effective. By artificially increasing the avoided cost price signal, DSM measures that would not otherwise pass the cost-effectiveness test are accepted into the optimized DSM portfolio and incorporated within the acquisition target. This preference for DSM resources is separate from, and in addition to, any quantifiable non-energy impacts (generally benefits) that Avista is able to quantify for inclusion as an efficiency resource option benefit within the TRC cost-effectiveness test.

## Chapter 3: Demand-Side Resources

## Conservation Potential Assessment Findings

Prior to the development of potential estimates, EnerNOC created a baseline end-use forecast to quantify the use of natural gas by end-use, in the base year, and projections of consumption in the future in the absence of utility programs and naturally occurring conservation. The end-use forecast includes the relatively certain impacts of codes and standards that will unfold over the study timeframe. All such mandates that were defined as of January 2013 are included in the baseline. The baseline forecast is the foundation for the analysis of savings from future DSM efforts as well as the metric against which potential savings are measured.

Inputs to the baseline forecast include current economic growth forecasts, natural gas price forecasts, trends in fuel shares and equipment saturations developed by EnerNOC, existing and approved changes to building codes and equipment standards, and Avista's internally developed load forecast.

According to the CPA completed for Avista, the residential sector natural gas consumption for all end uses and technologies increases primarily due to the projected 1.0 percent annual growth in the number of households, but also due to the slight increase in the average home size. Other heating, which includes unit wall heaters and miscellaneous loads, have a relatively high growth rate compared to other loads. However, at the end of the 20-year planning period these loads represent only a small part of overall natural gas use.

For the commercial and industrial sectors, natural gas use continues to grow slowly over the 20-year planning horizon as new construction increases the overall square footage in this sector. Growth in heating, ventilation and air conditioning (HVAC) and water heating end uses is moderate. Food preparation, though a small percentage of total usage, grows at a higher rate than other end uses. Consumption by miscellaneous equipment and process heating are also projected to increase.

Table 3.1 illustrates the system-wide baseline forecast of natural gas use across all sectors for selected years to include the baseline year, annually for the years to the next IRP cycle, and selected years thereafter. This baseline increases by 11 percent over the 20-year planning horizon corresponding to an annualized growth of 0.5 percent. Overall, the forecast projects steady growth over the next 20 years with growth in the residential sector making up for the decrease in industrial sector sales. Idaho is projected to experience the highest level of growth, with Oregon having the next highest level of growth.

## Chapter 3: Demand-Side Resources

**Table 3.1 Baseline Forecast Summary (1,000's of therms)**

Sector	2013	2015	2016	2019	2024	2034	% Change (2013-2034)	Avg. Growth Rate (2013-2034)
Residential	199,115	197,496	199,264	204,876	206,391	232,976	17%	0.7%
Commercial	126,489	126,009	127,191	129,099	127,577	129,402	2%	0.1%
Industrial	5,015	5,252	5,524	5,867	5,477	4,491	-10%	-0.5%
<b>Total</b>	<b>330,619</b>	<b>328,757</b>	<b>331,980</b>	<b>339,842</b>	<b>339,444</b>	<b>366,869</b>	<b>11%</b>	<b>0.5%</b>

State	2013	2015	2016	2019	2024	2034	% Change (2013-2034)	Avg. Growth Rate (2013-2034)
Washington	173,409	171,422	172,719	176,166	175,134	183,693	6%	0.3%
Idaho	76,250	77,988	79,291	82,207	82,739	91,603	20%	0.9%
Oregon	80,960	79,346	79,969	81,469	81,571	91,574	13%	0.6%
<b>Total</b>	<b>330,619</b>	<b>328,757</b>	<b>331,980</b>	<b>339,842</b>	<b>339,444</b>	<b>366,869</b>	<b>11%</b>	<b>0.5%</b>

The next step in the study is the development of the three types of potential: technical, economic and achievable. Technical potential is the theoretical upper limit of conservation potential. This assumes that all customers replace equipment with the most efficient option available and adopt the most efficient energy use practices possible at every opportunity without regard to cost-effectiveness. Economic potential represents the adoption of all cost-effective conservation measures based on the TRC test in Idaho and Oregon and the PAC test in Washington. The achievable potential takes into account market maturity, customer preferences for energy efficiency technologies and expected program participation. Achievable potential establishes a realistic target for conservation savings that a utility can expect to achieve through its efficiency programs.

DSM measures that achieve generally uniform year round energy savings independent of weather are considered base load measures. Examples include high efficiency water heaters, cooking equipment and front load clothes washers. Weather sensitive measures are those which are influenced by HDD factors and include higher efficiency furnaces, ceiling/wall/floor insulation, weather stripping, insulated windows, duct work improvements (tighter sealing to reduce leaks) and ventilation heat recovery systems (capturing chimney heat). Weather sensitive measures are often referred to as winter

## Chapter 3: Demand-Side Resources

load shape measures and are typically valued using a higher avoided cost (due to summer to winter pricing differentials) while base load measures (often called annual load shape measures) are valued at a lower avoided cost.

Avista offers conservation measures to residential, non-residential and low-income customers.<sup>2</sup> Measures offered to residential customers are almost universally on a prescriptive basis, meaning they have a fixed incentive for all customers and do not require individual pre-project analysis by the utility. Low income customers are treated with a more flexible approach through cooperative arrangements with participating Community Action Agency partnerships. Non-residential customers have access to prescriptive and site-specific conservation measures. Site-specific measures customized to specific applications have cost and therm savings unique to the individual facility.

In Oregon, some conservation measures are legally required and therefore their costs and benefits become part of the portfolio without being subject to cost-effectiveness testing. These measures, for example, include energy audits that do not in and of themselves generate energy savings absent customer action and the timing and cost-effectiveness of the action(s) taken by the customer are uncertain.

See Table 3.2 for residential, commercial and industrial measures evaluated in this study for all three states.

---

<sup>2</sup> For purposes of tables, figures and targets, low-income is a subset of residential class.

## Chapter 3: Demand-Side Resources

Table 3.2 Conservation Measures

Residential Measures	Commercial and Industrial Measures
Furnace – Maintenance Boiler – Pipe Insulation Insulation – Ducting Insulation – Infiltration Control Insulation – Ceiling Insulation – Wall Cavity Insulation – Attic Hatch Insulation – Foundation (new only) Ducting – Repair and Sealing Doors – Storm and Thermal Windows – ENERGY STAR Thermostat – Clock/Programmable Water Heating – Faucet Aerators Water Heating – Low Flow Showerheads Water Heating – Pipe Insulation Water Heating – Tank Blanket/Insulation Water Heating – Thermostat Setback Water Heating – Timer Water Heating – Hot Water Saver Water Heating – Drain Water Heat Recovery (new only) Home Energy Management System Advanced new Construction Designs (new only) ENERGY STAR Homes (new only)	Furnace – Maintenance Boiler – Maintenance Boiler – Hot Water Reset Boiler – High Efficiency Hot Water Circulation Space Heating – Heat Recovery Ventilator Insulation – Ducting Insulation – Ceiling Insulation – Wall Cavity Ducting – Repair and Sealing Windows – High Efficiency Energy Management System Thermostat – Clock/Programmable Water Heating – Faucet Aerators Water Heating – Pipe Insulation Water Heating – Tank Blanket/Insulation Water Heating – Hot Water Saver Advanced New Construction Designs (new only) Comprehensive Commissioning Process – Boiler Hot Water Reset (industrial only)

## Conservation Potential Assessment Results

Based upon the previously described methodology and baseline forecasts, EnerNOC developed technical, economic and achievable potentials by jurisdiction and segment over a 20-year horizon.

The technical potential for Avista’s service territory for the 20-year IRP period reaches 46.5 percent of the baseline end-use forecast. This would be the full DSM potential without regard for cost effectiveness.

Economic potential applies the cost-effectiveness metric appropriate to each jurisdiction to measures identified within the technical potential and quantifies the impact of the adoption of cost-effective DSM measures. By the end of the 20-year timeframe, this represents 13.5 percent of the baseline energy forecast. The significant difference between the technical and economic potential is a reflection of the economic impact of falling natural gas avoided costs as well as the market saturation achieved in previous years with higher prevailing natural gas avoided costs. Past adoption of the most cost-effective measures leads to progressively higher costs for the remaining measures. At the same time the avoided cost value of these future adoptions is falling.

## Chapter 3: Demand-Side Resources

The achievable potential across the residential, commercial and industrial sectors, incorporating ramp rates derived from the Northwest Power and Conservation Council, is 10.1 percent of the baseline energy forecast by the end of 2034.

Tables 3.3 and 3.4 summarize cumulative conservation for each potential type for selected years across the 20-year CPA and IRP horizon. Initially, the large commercial sector provides a relatively higher percentage of the achievable savings compared with its share of sales, but this situation reverses so the residential sector's share of savings is the greatest due to growth in residential customer count. Please refer to the natural gas CPA provided in Appendix 3.1 for more details.

**Table 3.3 Summary of Cumulative Achievable, Economic and Conservation Potential**

	2015	2016	2019	2024	2034
<b>Baseline projection (1,000's of Therms)</b>	328,757	331,980	339,842	339,444	366,869
<b>Cumulative Natural Gas Savings (1,000's of Therms)</b>					
Achievable Potential	1,677	2,639	9,890	20,615	36,887
Economic Potential	4,152	5,877	17,371	32,580	49,566
Technical Potential	12,512	19,298	53,433	100,103	170,543
<b>Cumulative Natural Gas as a percentage of Baseline</b>					
Achievable Potential	0.5%	0.8%	2.9%	6.1%	10.1%
Economic Potential	1.3%	1.8%	5.1%	9.6%	13.5%
Technical Potential	3.8%	5.8%	15.7%	29.5%	46.5%


The overall achievable potential is presented first by state and then by sector in Table 3.4.

Chapter 3: Demand-Side Resources

**Table 3.4 Summary of Cumulative Achievable Potential by State and Sector**

Cumulative Savings (1,000's of Therms)	2015	2016	2019	2024	2034
Washington	1,287	2,024	7,781	15,822	26,997
Idaho	228	342	1,029	2,316	4,504
Oregon	161	272	1,080	2,477	5,386
<b>Total</b>	<b>1,677</b>	<b>2,639</b>	<b>9,890</b>	<b>20,615</b>	<b>36,887</b>
Cumulative Savings (1,000's of Therms)	2015	2016	2019	2024	2034
Residential	384	727	5,279	10,154	15,957
Small Commercial	296	480	1,400	3,286	6,924
Large Commercial	969	1,390	3,085	6,907	13,599
Industrial	27	42	126	268	407
<b>Total</b>	<b>1,677</b>	<b>2,639</b>	<b>9,890</b>	<b>20,615</b>	<b>36,887</b>

Figure 3.1 illustrates the impact of the DSM potential forecast upon the end-use baseline absent any DSM acquisition. By the end of the 20-year period, the achievable potential (indicated by the light blue line) offsets 102 percent of the growth in the baseline forecast for the Avista service territory. This is in part the consequence of low load growth as well as the higher level of achievable DSM identified within Washington (Avista’s largest jurisdiction) using the more generous PAC cost-effectiveness test metric.

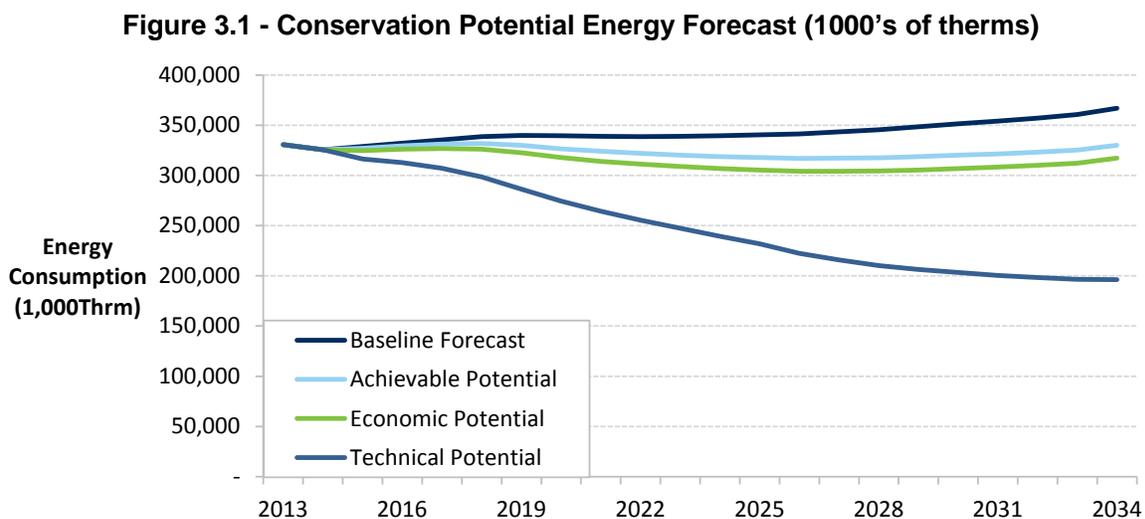

## Chapter 3: Demand-Side Resources

## Residential Potential Results

Single-family homes represent 78 percent of Avista’s residential natural gas customers, but account for 83 percent of the sector’s consumption in the study base year 2013. The state of Washington is a disproportionate quantity of the savings since the target acquisition relies on the PAC test while Oregon and Idaho relies on the TRC test.

Table 3.5 provides a distribution of achievable potential by state for the residential sector.

**Table 3.5 – Residential Cumulative Achievable Potential by State, Selected Years**

	2015	2016	2019	2024	2034
<b>Baseline Projection (1,000’s of Therms)</b>					
Washington	101,488	102,205	105,064	105,708	116,970
Idaho	46,978	47,633	49,224	49,670	58,109
Oregon	49,029	49,426	50,589	51,012	57,897
<b>Total</b>	<b>197,496</b>	<b>199,264</b>	<b>204,876</b>	<b>206,391</b>	<b>232,976</b>
<b>Natural Gas Cumulative Savings (1,000’s of Therms)</b>					
Washington	370	682	4,643	8,898	13,676
Idaho	6	18	261	493	875
Oregon	8	27	375	763	1,405
<b>Total</b>	<b>384</b>	<b>727</b>	<b>5,279</b>	<b>10,154</b>	<b>15,957</b>
<b>% of Total Residential Savings</b>					
Washington	96%	94%	88%	88%	86%
Idaho	1%	3%	5%	5%	5%
Oregon	2%	4%	7%	8%	9%

Most residential potential exists in space heating end-uses and water heating applications. Appliances and miscellaneous end-use loads contribute a small percentage of potential. Based on measure-by-measure finding of the potential study the greatest sources of residential achievable potential across all three jurisdictions are:

- Shell measures and insulation.
- Thermostats and home energy monitoring systems.
- Water-saving devices, such as low-flow showerheads and faucet aerators.

## Chapter 3: Demand-Side Resources

- Water heater tank blankets and pipe insulation.

## Commercial and Industrial Potential Results

The baseline forecast for the commercial and industrial sector grows steadily during the forecast period. Consequently, energy efficiency opportunities are significant for this sector. However, similar to the residential sector, the historically low avoided cost projections limit the achievable potential.

The large commercial sector provides the greatest opportunities for savings. Although potential as a percentage of baseline use varies from one sector to the next, results do not vary greatly among the three states under the TRC test; Washington has higher savings due to using the PAC cost effectiveness test. Tables 3.6 and 3.7 show the commercial and industrial achievable potential by sector for selected years.

**Table 3.6 – Commercial and Industrial Cumulative Achievable Potential by Selected Years**

	2015	2016	2019	2024	2034
<b>Baseline projection (1,000's of Therms)</b>					
Small Commercial	51,170	51,514	51,931	50,861	52,475
Large Commercial	74,839	75,677	77,168	76,716	76,927
Industrial	5,252	5,524	5,867	5,477	4,491
<b>Total</b>	<b>178,239</b>	<b>180,349</b>	<b>184,098</b>	<b>182,156</b>	<b>189,882</b>
<b>Natural Gas Savings (1,000's of Therms)</b>					
Small Commercial	296	480	1,400	3,286	6,924
Large Commercial	969	1,390	3,085	6,907	13,599
Industrial	27	42	126	268	407
<b>Total</b>	<b>1,292</b>	<b>1,912</b>	<b>4,611</b>	<b>10,461</b>	<b>20,930</b>
<b>% of Total Commercial and Industrial Savings</b>					
Small Commercial	23%	25%	30%	31%	33%
Large Commercial	75%	73%	67%	66%	65%
Industrial	2%	2%	3%	3%	2%

## Chapter 3: Demand-Side Resources

**Table 3.7 – Commercial and Industrial Cumulative Achievable Potential by State, Selected Years**

Cumulative Savings (1,000's of Therms)	2015	2016	2019	2024	2034
Washington	917	1,343	3,138	6,924	13,321
Idaho	223	324	768	1,824	3,629
Oregon	153	245	705	1,714	3,981
<b>Total</b>	<b>1,292</b>	<b>1,912</b>	<b>4,611</b>	<b>10,461</b>	<b>20,930</b>
Cumulative Natural Gas Savings (% of Statewide Baseline)					
Washington	1.3%	1.9%	4.4%	10.0%	20.0%
Idaho	0.7%	1.0%	2.3%	5.5%	10.8%
Oregon	0.5%	0.8%	2.3%	5.6%	11.8%
<b>Total</b>	<b>1.0%</b>	<b>1.4%</b>	<b>3.4%</b>	<b>7.9%</b>	<b>15.6%</b>

Similar to residential sector, most of the commercial and industrial potential exists in space and water heating applications. Food preparation, process and miscellaneous represents a smaller proportion of potential. Primary sources of commercial and industrial sector achievable savings are:

- Energy management systems and programmable thermostats.
- Boiler operating measures such as maintenance.
- Hot water reset and efficient circulation.
- Equipment upgrades for furnaces, boilers and unit heaters.
- Food service equipment.

## Aggregate Potential Results

The following three tables provide the 2015-2016 CPA identified DSM opportunities for Idaho, Oregon and Washington, respectively.

## Chapter 3: Demand-Side Resources

**Table 3.8 – Idaho Natural Gas Savings Target (2015-2016)**

<b>Incremental Annual Savings (1,000's of Therms)</b>	<b>2015</b>	<b>2016</b>
Residential	6	13
Commercial & Industrial	223	101
<b>Total</b>	<b>228</b>	<b>114</b>

**Table 3.9 – Oregon Natural Gas Savings Target (2015-2016)**

<b>Incremental Annual Savings (1,000's of Therms)</b>	<b>2015</b>	<b>2016</b>
Residential	8	19
Commercial & Industrial	153	92
<b>Total</b>	<b>161</b>	<b>111</b>

**Table 3.10 – Washington Natural Gas Savings Target (2015-2016)**

<b>Incremental Annual Savings (1,000's of Therms)</b>	<b>2015</b>	<b>2016</b>
Residential	370	311
Commercial & Industrial	917	426
<b>Total</b>	<b>1,287</b>	<b>737</b>

## CPA Uses and Applications

It is useful to place the IRP process, and the CPA component of that process, into the larger perspective of Avista's efforts to acquire all available cost-effective DSM resources. Those activities outside the immediate scope of the IRP process include the formal annual business planning and annual cost-effectiveness and acquisition reporting processes, in addition to the ongoing management of the DSM portfolio.

The IRP process establishes a 20-year avoided cost stream that is essential not only to determining the quantity of DSM resources that are cost-effective when compared to the CPA-identified DSM supply curve, but also and perhaps more importantly the management of the DSM portfolio between the two-year IRP cycles. The avoided costs are critical to the selection and optimization of DSM delivery options on a real-time basis and as part of a comprehensive annual business planning process. The IRP-identified avoided costs also serve as the foundation for calculating the portfolios actual cost-effectiveness performance as part of Avista's retrospective DSM Annual Report.

## Chapter 3: Demand-Side Resources

These related and coordinated processes contribute to the planning and management of the DSM portfolio towards meeting its cost-effectiveness and acquisition goals.

The relationship between the CPA and the annual business planning process is of particular note. The CPA is a high-level tool useful for establishing aggregate targets and identifying general target markets and target measures. However, the CPA must make certain broad assumptions regarding key characteristics that are fine-tuned in the operational business plan. Some of the most frequently modified assumptions include market segmentation, customer eligibility, measure definition, incentive level, interaction between measures and opportunities for packaging measures or coordinating the delivery of measures.

The increased level of detail in the operational business planning process generally improves the cost-effectiveness of the individual measures and the overall portfolio. Eligibility and measure definitions can be fine-tuned to target the most cost-effective elements of a measure in such a way that marginally cost-ineffective measures can become cost-effective contributors to the portfolio. However, it can also be true that the high-level assumptions made as part of the CPA may be overly optimistic when applied to individual programs.

One issue that inevitably arises when moving from the CPA to the business planning process is the treatment of market segments. The CPA defines market segments (e.g. by residential building type or vintage) to appropriately define the cost-effective potential for efficiency options and to ensure consistency with system loads and load forecasts. However, it is often infeasible to recognize these distinctions on an operational basis. This may result in aggregations of market segments into programs that could lead to more or less operationally achievable savings.

The continuation of the downward trend in natural gas avoided cost expectations is causing a growing deviation between the CPA and business planning process. CPA processes generally make the simplifying assumption that non-incentive utility costs are a constant percentage of the customer's incremental cost or of the offered incentive. Operationally there may be fixed and incremental components to these non-incentive costs and there may be economies of scale when enlarging the size of the portfolio (or conversely diseconomies of scale when the portfolio decreases due to lower avoided costs). CPA processes often function at too high of a level to recognize these operational details and are unable to predict the point at which the quantity of cost-effective DSM and the cost-effectiveness margin associated with those measures are insufficient to offset fixed portfolio costs and diseconomies of scale. These challenges are more appropriately left to the operational business planning processes.

## Chapter 3: Demand-Side Resources

## Conclusion

Avista has a long-term commitment to responsibly pursuing all available and cost-effective efficiency options as an important means to reduce customer's energy costs. Cost-effective DSM options are a key element in Avista's strategy to meet those commitments. Falling avoided costs and low growth in customer demand have led to a reduced role for DSM in the natural gas portfolio, although as a consequence of the lower growth and the change in the cost-effectiveness metric applicable to the Washington jurisdiction, DSM greatly offset future load growth.

Avista is working to optimize how natural gas efficiency resource acquisition under this radically different economic environment. Important factors that must be considered within this optimization include:

- The criteria for adopting measures within the portfolio.
- The nature of Avista's non-incentive utility cost.
- The level of incentives established with particular attention to their implications upon the PAC test performance.
- Alternative means of moving cost-effective efficiency options forward.

In June 2014, Avista will begin developing the Washington and Idaho 2015 DSM Business Plan. This process is an opportunity to review the electric and natural gas DSM portfolios and perform the optimizations noted above. Within Washington, where the PAC test is being applied to this optimization process, there will be a review of the customer financial incentives to determine if the lower avoided costs are sufficient to support existing incentive levels. The Idaho portfolio review will determine if there are new opportunities that would allow a TRC cost-effective portfolio offering.

In Oregon the on-going optimization of the DSM portfolio has led to significant improvements in TRC cost-effectiveness performance in 2013, though revised unit energy savings may make it difficult to deliver the same level of performance in 2014. Nevertheless, there is a favorable trend occurring in the cost-effectiveness of the non-mandated portfolio components.

Perhaps of most importance in the long-term are Avista's ongoing efforts to work with others to develop a regional natural gas market transformation organization and portfolio. This concept has been developing for nearly a decade, but current circumstances have moved the discussion closer to the realization of such an organization. Regional natural gas utilities are actively working with the Northwest Energy Efficiency Alliance (NEEA) to develop a proposal for a natural gas market

## Chapter 3: Demand-Side Resources

transformation entity similar to the electric market transformation efforts. The viability of market transformation efforts are likely to be less impacted by falling avoided costs since they focus upon technologies and markets where strategically selected market transformation interventions can have a disproportionate impact upon markets for efficient products and services. This makes market transformation a valuable tool in a lower avoided cost environment.

The CPA does not specify market transformation since it focuses on conservation potential without regard to how that potential is achieved. The prospect for a regional market transformation entity will potentially bring a valuable tool in working towards the achievement of the cost-effective conservation opportunities identified in the CPA.

Avista is also working with regional natural gas utilities on an ad hoc natural gas heat pump water heater technology pilot in anticipation of a future market transformation portfolio. The progress and prospective funding of this venture is a favorable indication that a cooperative regional market transformation effort is viable.

Avista anticipates that a proposal for a permanent natural gas market transformation organization will advance for regional discussion by the end of 2014. It is hoped that successes in this area will augment cost-effective local efforts and create additional local programmatic DSM opportunities.

## Chapter 3: Demand-Side Resources

## 4: Supply-Side Resources

### Overview

Avista analyzed a range of future demand scenarios and possible cost-effective conservation measures to reduce demand. This chapter discusses supply options to meet net demand. Avista's objective is to provide reliable natural gas to customers with an appropriate balance of price stability and prudent cost under changing market conditions. To achieve this objective, Avista evaluates a variety of supply-side resources and attempts to build a diversified natural gas supply portfolio. The resource acquisition and commodity procurement programs resulting from the evaluation consider physical and financial risks, market-related risks, and procurement execution risks; and identify the methods to mitigate these risks.

Avista manages natural gas procurement and related activities on a system-wide basis with several regional supply options available to serve core customers. Supply options include firm and non-firm supplies, firm and interruptible transportation on six interstate pipelines, and storage. Because Avista's core customers span three states, the diversity of delivery points and demand requirements adds to the options available to meet customers' needs. The utilization of these components varies depending on demand and operating conditions. This chapter discusses the available regional commodity resources and Avista's procurement plan strategies, the regional pipeline resource options available to deliver the commodity to customers, and the storage resource options available to provide additional supply diversity, enhanced reliability, favorable price opportunities, and flexibility to meet a varied demand profile. Non-traditional resources are also considered.

### Commodity Resources

#### Supply Basins

Avista is fortunate to be located near the two largest natural gas producing regions in North America – the Western Canadian Sedimentary Basin (WCSB), located in the Canadian provinces of Alberta and British Columbia, and the Rocky Mountain (Rockies) gas basin, located in Wyoming, Utah and Colorado. Avista sources most of its natural gas supplies from these two basins.

Several large pipelines connect the WCSB and Rockies gas basins to the Pacific Northwest, Southwest, Midwest and Northeast sections of the continent. Historically, natural gas supplies from the WCSB and Rockies cost less relative to other parts of the

## Chapter 4: Supply-Side Resources

country. Shale gas production from the Northeast has altered flow dynamics and helped sustain the regional pricing discount. Forecasts show a long-term regional price advantage for WCSB and Rockies basins as the need for these supplies in the East diminishes as more shale gas supply develops in the East.

Increased availability of North American natural gas has prompted a change in the global LNG landscape. Excess supply has prompted LNG developers to consider exporting natural gas to capture higher prices in the Asian and European markets. Regionally, there are two proposed projects in Oregon - Jordan Cove and Oregon LNG. Jordan Cove and Oregon LNG have each received their FERC export authorization. There are 16 announced export LNG projects in British Columbia. While there is much uncertainty about the number of completed facilities, the bigger question is the impact of exports on regional infrastructure and prices.

### Regional Market Hubs

There are numerous regional market hubs where natural gas is traded extending from the two primary basins. These regional hubs are typically located at pipeline interconnects. Avista is located near and transacts at most of the Pacific Northwest regional market hubs, enabling flexible access to several supply points. These supply points include:

- **AECO** – The AECO-C/Nova Inventory Transfer market center located in Alberta is a major connection region to long-distance transportation systems, which take natural gas to points throughout Canada and the United States. Alberta is the major Canadian exporter of natural gas to the U.S. and historically produced 90 percent of Canada's natural gas.
- **Rockies** – This pricing point represents several locations on the southern end of the NWP system in the Rocky Mountain region. The system draws on Rocky Mountain natural gas-producing areas clustered in areas of Colorado, Utah and Wyoming.
- **Sumas/Huntingdon** – This pricing point at Sumas, Washington, is on the U.S./Canadian border where the northern end of the NWP system connects with Spectra Energy's Westcoast Pipeline and predominantly markets Canadian gas from Northern British Columbia.
- **Malin** – This pricing point is at Malin, Oregon, on the California/Oregon border where the pipelines of TransCanada Gas Transmission Northwest (GTN) and Pacific Gas & Electric Company connect.


## Chapter 4: Supply-Side Resources

- **Station 2** – Located at the center of the Spectra Energy/Westcoast Pipeline system connecting to northern British Columbia natural gas production.
- **Stanfield** – Located near the Washington/Oregon border at the intersection of the NWP and GTN pipelines.
- **Kingsgate** – Located at the U.S./Canadian (Idaho) border where the GTN pipeline connects with the TransCanada Foothills pipeline.

Given the ability to transport natural gas across North America, natural gas pricing is often compared to the Henry Hub price for natural gas. Henry Hub, located in Louisiana, is the primary natural gas pricing point in the U.S. and is the trading point used in NYMEX futures contracts.

Figure 4.1 shows historic natural gas prices for first-of-month index physical purchases at AECO, Sumas, Rockies and Henry Hub. The figure illustrates there is usually a tight relationship among the regional market hubs; however, there have been periods where one or more price points have disconnected.

**Figure 4.1: Monthly Index Prices**

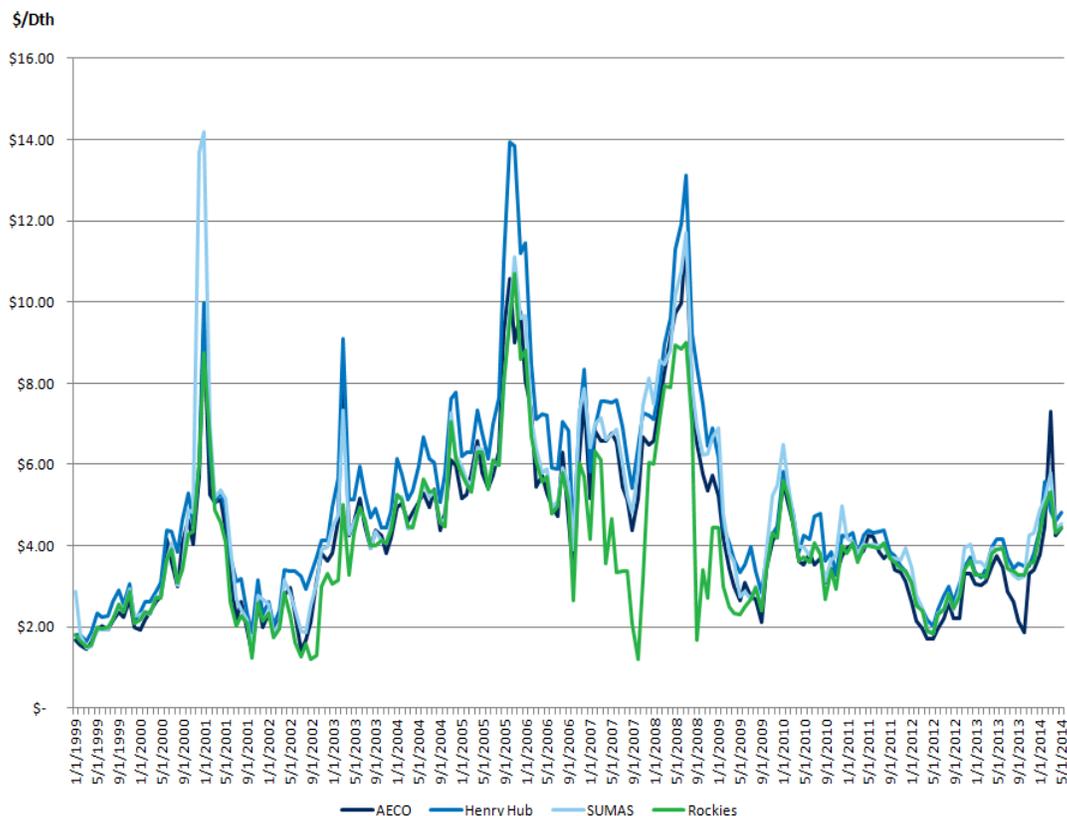

## Chapter 4: Supply-Side Resources

Northwest regional natural gas prices typically move together; however, the basis differential can change depending on market or operational factors. This includes differences in weather patterns, pipeline constraints, and the ability to shift supplies to higher-priced delivery points in the U.S. or Canada. By monitoring these price shifts, Avista can often purchase at the lowest-priced trading hubs on a given day, subject to operational and contractual constraints.

Liquidity is generally sufficient in the day-markets at most Northwest supply points. AECO continues to be the most liquid supply point, especially for longer-term transactions. Sumas has historically been the least liquid of the four major supply points (AECO, Rockies, Sumas and Malin). This illiquidity contributes to generally higher relative prices in the high demand winter months.

Avista procures natural gas via contracts. Contract specifics vary from transaction-to-transaction, and many of those terms or conditions affect commodity pricing. Some of the terms and conditions include:

- **Firm vs. Non-Firm:** Most term contracts specify that supplies are firm except for force majeure conditions. In the case of non-firm supplies, the standard provision is that they may be cut for reasons other than force majeure conditions.
- **Fixed vs. Floating Pricing:** The agreed-upon price for the delivered gas may be fixed or based on a daily or monthly index.
- **Physical vs. Financial:** Certain counterparties, such as banking institutions, may not trade physical natural gas, but are still active in the natural gas markets. Rather than managing physical supplies, those counterparties choose to transact financially rather than physically. Financial transactions provide another way for Avista to financially hedge price.
- **Load Factor/Variable Take:** Some contracts have fixed reservation charges assessed during each of the winter months, while others have minimum daily or monthly take requirements. Depending on the specific provisions, the resulting commodity price will contain a discount or premium compared to standard terms.
- **Liquidated Damages:** Most contracts contain provisions for symmetrical penalties for failure to take or supply natural gas.

For this IRP, the SENDOUT® model assumes natural gas purchases under a firm, physical, fixed-price contract, regardless of contract execution date and type of contract. Avista pursues a variety of contractual terms and conditions to capture the most value for customers. Avista's natural gas buyers actively assess the most cost-effective way to meet customer demand and optimize unutilized resources.

## Chapter 4: Supply-Side Resources

**Avista's Procurement Plan**

No company can accurately predict future natural gas prices, but market conditions and experience help shape the overall approach. Avista's natural gas procurement plan process seeks to acquire natural gas supplies while reducing exposure to short-term price volatility. The procurement strategy includes hedging, storage utilization and index purchases. Although the specific provisions of the procurement plan will change based on ongoing analysis and experience, the following principles guide Avista's procurement plan.

**Avista employs a time, location and counterparty diversified hedging strategy.** It is appropriate to hedge over a period and establish hedge periods when portions of future demand are physically and/or financially hedged. Avista views hedging as an appropriate part of a diversified procurement plan and provides a level of known pricing and stability to customers. Hedges may not be at the lowest possible price, but they still protect customers from price volatility. With access to multiple supply basins, Avista transacts with the lowest priced basin at the time of the hedge. Furthermore, Avista transacts with a range of counterparties to spread supply among a wider range of market participants.

**Avista uses a disciplined, but flexible hedging approach.** In addition to establishing periods when hedges are to be completed, Avista also sets upper and lower pricing points. This reduces Avista's exposure to extreme price spikes in a rising market and encourages capturing the benefit associated with lower prices.

**Avista regularly reviews its procurement plan in light of changing market conditions and opportunities.** Avista's plan is open to change in response to ongoing review of the procurement plan assumptions. Even though the initial plan establishes various targets, policies provide flexibility to exercise judgment to revise targets in response to changing conditions.

Avista utilizes a number of tools to help mitigate financial risks. Avista purchases gas in the spot market and forward markets. Spot purchases are for the next day or weekend. Forward purchases are for future delivery. Many of these tools are financial instruments or derivatives that can provide fixed prices or dampen price volatility. Avista continues to evaluate how to manage daily demand volatility, whether through option tools from counterparties or through access to additional storage capacity and/or transportation.

**Market-Related Risks and Risk Management**

There are several definitions of risk management. The IRP focuses on two areas of risk: the financial risk where the cost to supply customers will be unreasonably high or

## Chapter 4: Supply-Side Resources

volatile, and the physical risk that there may not be enough natural gas resources (either transportation capacity or the commodity) to serve core customers.

Avista's Risk Management Policy describes the policies and procedures associated with financial and physical risk management. The Risk Management Policy addresses issues related to management oversight and responsibilities, internal reporting requirements, documentation and transaction tracking, and credit risk.

Two internal organizations assist in the establishment, reporting and review of Avista's business activities as they relate to management of natural gas business risks:

- The Risk Management Committee includes corporate officers and senior-level management. The committee establishes the Risk Management Policy and monitors compliance. They receive regular reports on natural gas activity and meet regularly to discuss market conditions, hedging activity and other natural gas-related matters.
- The Strategic Oversight Group coordinates natural gas matters among internal natural gas-related stakeholders and serves as a reference/sounding board for strategic decisions, including hedges, made by the Natural Gas Supply department. Members include representatives from the Accounting, Regulatory, Credit, Power Resources, and Risk Management departments. While the Natural Gas Supply department is responsible for implementing hedge transactions, the Strategic Oversight Group provides input and advice.

### Transportation Resources

Although proximity to liquid market hubs is important from a cost perspective, supplies are only as reliable as the pipeline transportation from the hubs to Avista's service territories. Capturing favorable price differentials and mitigating price and operational risk can also be realized by holding multiple pipeline transport options. Avista contracts for a sufficient amount of diversified firm pipeline capacity from various receipt and delivery points (including storage facilities), so that firm deliveries will meet peak day demand. This combination of firm transportation rights to Avista's service territory, storage facilities and access to liquid supply basins ensure peak supplies are available to serve core customers.

The major pipelines servicing the region include:

- **Williams - Northwest Pipeline (NWP)**  
A natural gas transmission pipeline serving the Pacific Northwest moving natural

## Chapter 4: Supply-Side Resources

gas from the U.S./Canadian border in Washington and from the Rocky Mountain region of the U.S.

- **TransCanada Gas Transmission Northwest (GTN):** A natural gas transmission pipeline originating at Kingsgate, Idaho, (Canadian/U.S. border) and terminating at the California/Oregon border close to Malin, Oregon.
- **TransCanada Alberta System:** This natural gas gathering and transmission pipeline in Alberta, Canada, delivers natural gas into the TransCanada Foothills pipeline at the Alberta/British Columbia border.
- **TransCanada Foothills System:** This natural gas transmission pipeline delivers natural gas between the Alberta, British Columbia, border and the Canadian/U.S. border at Kingsgate, Idaho.
- **TransCanada Tuscarora Gas Transmission:** This natural gas transmission pipeline originates at Malin, Oregon, and terminates at Wadsworth, Nevada.
- **Spectra Energy - Westcoast Pipeline:** This natural gas transmission pipeline originates at Fort Nelson, British Columbia, and terminates at the Canadian/U.S. border at Huntington, British Columbia/Sumas, Washington.
- **El Paso Natural Gas– Ruby pipeline:** This natural gas transmission pipeline brings supplies from the Rocky Mountain region of the U.S. to interconnections near Malin, Oregon.

Avista has contracts with all of the above pipelines (with the exception of Ruby Pipeline) for firm transportation to serve our core customers. Table 4.1 details the firm transportation/resource services contracted by Avista. These contracts are of different vintages, thus different expiration dates; however, all have the right to be renewed by Avista. This gives Avista and its customers the knowledge that Avista will have available capacity to meet existing core demand now and in the future.

## Chapter 4: Supply-Side Resources

**Table 4.1: Firm Transportation Resources Contracted (Dth/Day)**

Firm Transportation	Avista North		Avista South	
	Winter	Summer	Winter	Summer
NWP TF-1	157,869	157,869	42,699	42,699
GTN T-1	100,605	75,782	42,260	20,640
NWP TF-2	<u>91,200</u>		<u>2,623</u>	
<b>Total</b>	<b>349,674</b>	<b>233,651</b>	<b>87,582</b>	<b>63,339</b>
<b>Firm Storage Resources - Max Deliverability</b>				
Jackson Prairie (Owned and Contracted)	346,667		54,623	
<b>Total</b>	<b>346,667</b>		<b>54,623</b>	

*\* Represents original contract amounts after releases expire.*


Avista defines two categories of interstate pipeline capacity. “Direct-connect” pipelines deliver supplies directly to Avista’s local distribution system from production areas, storage facilities or interconnections with other pipelines. “Upstream” pipelines deliver natural gas to the direct-connect pipelines from remote production areas, market centers and out-of-area storage facilities. Figure 4.2 illustrates the direct-connect pipeline network relative to Avista’s supply sources and service territories.<sup>1</sup>

---

<sup>1</sup> Avista has a small amount of pipeline capacity with TransCanada Tuscarora Gas Transmission, a natural gas transmission pipeline originating at Malin, Oreg., to service a small number of Oregon customers near the southern border of the state.

## Chapter 4: Supply-Side Resources

Figure 4.2: Direct-Connect Pipelines

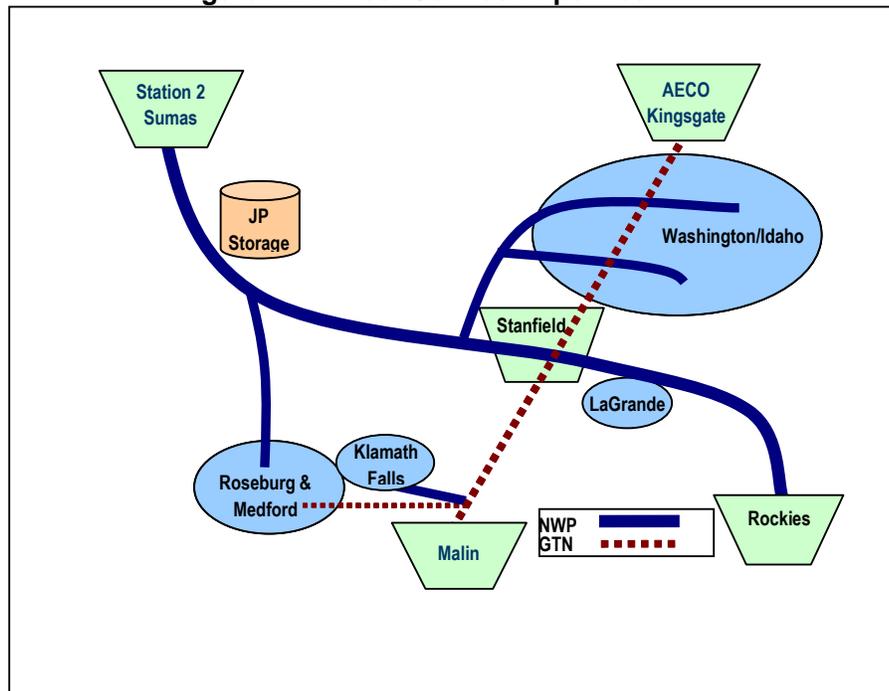

Supply-side resource decisions focus on where to purchase natural gas and how to deliver it to customers. Each LDC has distinctive service territories and geography relative to supply sources and pipeline infrastructure. Solutions that deliver supply to service territories among regional LDCs are similar but are rarely generic.

The NWP system, for the most part, is a fully-contracted system. With the exception of La Grande, Avista's service territories lie at the end of NWP pipeline laterals. The Spokane, Coeur d'Alene and Lewiston laterals serve Washington/Idaho load, and the Grants Pass lateral serves Roseburg and Medford. Capacity expansions of these laterals would be lengthy and costly endeavors which Avista would likely bear most of the incremental costs.

The GTN system currently has ample unsubscribed capacity. This pipeline runs directly through or near most of Avista's service territories. Mileage based rates provides an attractive option for securing incremental resource needs.

Peak day planning aside, both pipelines provide an array of options to flexibly manage daily operations. The NWP and GTN pipelines directly serve Avista's two largest service territories, providing diversification and risk mitigation with respect to supply source, price and reliability. The NWP system (a bi-directional, fixed reservation fee-based

## Chapter 4: Supply-Side Resources

pipeline) provides direct access to Rockies and British Columbia supply and facilitates optionality for storage facility management. The Stanfield interconnect of the two lines is also geographically well situated to Avista's service territories.

The rates used in the planning model start with filed rates currently in effect (See Appendix 4.1). Forecasting future pipeline rates is challenging. Assumptions for future rate changes are the result of market information on comparable pipeline projects, prior rate case experience, and informal discussions with regional pipeline owners. Pipelines will file to recover costs at rates equal to the GDP with adjustments made for specific project conditions.

NWP and GTN also offer interruptible transportation services. Interruptible transportation is subject to curtailment when pipeline capacity constraints limit the amount of natural gas that may be moved. Although the commodity cost per dekatherm transported is the same as firm transportation, there are no demand or reservation charges in these transportation contracts. As the marketplace for release of transportation capacity by the pipeline companies and other third parties has become more prevalent, the use of interruptible transportation services has diminished. Avista does not rely on interruptible capacity to meet peak day core demand requirements.

Avista's transportation acquisition strategy is to contract for firm transportation to serve core customers on a peak day in the planning horizon. Since contracts for pipeline capacity are often lengthy and core customer demand needs can vary over time, determining the appropriate level of firm transportation is a complex analysis. The analysis includes the projected number of firm customers and their expected annual and peak day demand, opportunities for future pipeline or storage expansions, and relative costs between pipelines and upstream supplies. This analysis is on an annual basis, as well as through the IRP. Active management of underutilized capacity through the capacity release market and engaging in optimization transactions offsets some transportation costs. Timely analysis is also important in order to maintain an appropriate time cushion to allow for required lead times should the need for securing new capacity arise (See Chapter 5 for a more detailed description of the management of underutilized pipeline resources).

### **Storage Resources**

Storage is a valuable strategic resource that enables improved management of a highly seasonal and varied demand profile. Storage benefits include:

## Chapter 4: Supply-Side Resources

- Flexibility to serve peak period needs.
- Access to typically lower cost off-peak supplies.
- Reduced need for higher cost annual firm transportation.
- Improved utilization of existing firm transportation via off-season storage injections.
- Additional supply point diversity.

While there are several storage facilities available to the region, Avista's existing storage resources consist solely of ownership and leasehold rights at the Jackson Prairie Storage facility.

**Jackson Prairie Storage**

Avista is one-third owner, with NWP and Puget Sound Energy (PSE), of the Jackson Prairie Storage Project for the benefit of its core customers in all three states. Jackson Prairie Storage is an underground reservoir facility located near Chehalis, Washington approximately 30 miles south of Olympia, Washington. The total working gas capacity of the facility is approximately 25 Bcf. Avista's current share of this capacity for core customers is approximately 8.5 Bcf and includes 398,667 Dth of daily deliverability rights. Besides ownership rights, Avista leased an additional 95,565 Dth of Jackson Prairie capacity with 2,623 Dth of deliverability from NWP to serve Oregon customers.

**Incremental Supply-Side Resource Options**

Avista's existing portfolio of supply-side resources provides a mix of assets to manage demand requirements for average and peak day events. Avista monitors the following potential resource options to meet future requirements in anticipation of changing demand requirements. When considering or selecting a transportation resource, the appropriate natural gas supply pairs with the transportation resource and the SENDOUT<sup>®</sup> model prices the resources accordingly.

**System Enhancements**

Distribution planning plays a role in the IRP, but is not the primary focus. Distribution works with supply to meet customer demand on average and peak days. Modifications, enhancements or upgrades occur on the distribution system that are routine projects, enhancing system reliability. However, in certain instances, Avista can facilitate additional peak and base load-serving capabilities through a modification or upgrade of

## Chapter 4: Supply-Side Resources

distribution facilities. These projects would enable more takeaway capacity from the interstate pipelines. When resource deficiencies are identified, Gas Supply works with distribution engineering to assess if the distribution system can facilitate additional take away. These opportunities are geographically specific and require case-by-case study. Costs of these types of enhancements are included in the context of the IRP. A more detailed description of system enhancements (including both routine and non-routine) are in Chapter 7 – Distribution Planning.

### **Capacity Release Recall**

As discussed earlier, pipeline capacity not utilized to serve core customer demand is available to sell to other parties or optimized through daily or term transactions. Released capacity is generally marketed through a competitive bidding process and can be on a short-term (month-to-month) or long-term basis. Avista actively participates in the capacity release market with short-term and long-term capacity releases.

Avista assesses the need to recall capacity or extend a release of capacity on an on-going basis. The IRP process also helps evaluate if or when to recall some or all long-term releases.

### **Existing Available Capacity**

In some instances, there is currently available capacity on existing pipelines. NWP's mainline is fully subscribed; however, GTN mainline has available capacity. There is some uncertainty about the future capacity availability as the demand needs of utilities and end-users vary across the region. Avista models access to the GTN capacity as an option to meet our future demand needs.

### **GTN Backhauls**

The GTN interconnection with the Ruby Pipeline has enabled GTN the physical capability to provide a limited amount of firm back-haul service from Malin with minor modifications to their system. Fees for utilizing this service are under the existing Firm Rate Schedule (FTS-1) and currently include no fuel charges. Additional requests for back-haul service may require additional facilities and compression (i.e., fuel).

This service can provide an interesting solution for Oregon customers. For example, Avista can purchase supplies at Malin, Oregon and transport those supplies to Klamath

## Chapter 4: Supply-Side Resources

Falls or Medford. Malin-based natural gas supplies typically include a higher basis differential to AECO supplies, but are generally less expensive than the cost of forward-haul transporting those traditional supplies south and paying the associated demand charges. The GTN system is a mileage-based system, so Avista pays only a fraction of the rate if it is transporting supplies from Malin to Medford and Klamath Falls. The GTN system is approximately 612 miles long and the distance from Malin to the Medford lateral is only about 12 miles.

**New Pipeline Transportation**

Additional firm pipeline transportation resources are viable and attractive resource options. However, determining the appropriate level, supply source and associated pipeline path, costs and timing, and if existing resources will be available at the appropriate time, make this resource difficult to analyze. Firm pipeline transportation provides several advantages; it provides the ability to receive firm supplies at the production basin, it provides for base-load demand, and it can be a low-cost option given optimization and capacity release opportunities. Pipeline transportation also has several drawbacks, including typically long-dated contract requirements, limited need in the summer months (many pipelines require annual contracts), and limited availability and/or inconvenient sizing/timing relative to resource need.

Pipeline expansions are typically more expensive than existing pipeline capacity and often require long-term contracts. Even though expansions may be more expensive than existing capacity, this approach may still provide the best option given that some of the other options discussed in this section require matching pipeline transportation. Expansions may also provide reliability or access to supply that cannot be obtained through existing pipelines.

Several specific projects have been proposed for the region. The following summaries describe these projects while Figure 4.3 illustrates their location.

## Chapter 4: Supply-Side Resources

Figure 4.3: Proposed Pipeline Locations



- **NWP Washington Expansion**

NWP continues to explore options to expand service from Sumas, Wash., to markets along the Interstate-5 corridor. Looping sections of 36-inch diameter pipeline with the existing pipeline and additional compression at existing compressor stations can add incremental capacity. Actual miles of pipe and incremental compression will determine the amount of capacity created, but it can scale to meet market demand. This project is currently under FERC review.

- **Northwest Market Access Expansion (N-MAX)/Palomar Expansion**

NWP began working with Palomar Gas Transmission (a partnership between NW Natural and TransCanada) to develop the Cascade (eastern) section of the previously proposed Palomar gas transmission line in conjunction with an expansion of NWP's existing system. The proposed 106-mile, 30-inch-diameter pipeline would extend from TransCanada's GTN's mainline to NW Natural's

## Chapter 4: Supply-Side Resources

system near Molalla, Oregon. It would be a bi-directional pipeline with an initial capacity of up to 300 MMcf/d expandable up to 750 MMcf/d. In 2011, Palomar Gas Transmission withdrew its application for this pipeline, yet remains prepared if natural gas demand rebounds.

- **Spectra/FortisBC System Enhancement**

FortisBC and Spectra Energy are considering a 100-mile, 24-inch expansion project from Kingsvale to Oliver, British Columbia, to expand service to the Pacific Northwest and California markets. Removing constraints will allow expansion of Spectra's T-South enhanced service offering, which provides shippers the options of delivering to Sumas or the Kingsgate market. Expanding the bi-directional Southern Crossing system would increase capacity at Sumas during peak demand periods. Initial capacity from the Spectra system to Kingsgate would be 300 MMcf/d, expandable to 450 MMcf/d. Expanded east-to-west flow will increase delivery of supply to Sumas by an additional 150 MMcf/d. Currently, there is no plan to construct this pipeline, but it would be available if demand was sufficient.

Avista supports proposals that bring supply diversity and reliability to the region. Avista engages in discussions and analysis of the potential impact of each regional proposal from a demand serving and reliability/supply diversity perspective. None of the above projects provides direct delivery connection to any of the service territories. For Avista to consider them a viable incremental resource to meet demand needs would require combining them with additional capacity on existing pipeline resources. Given this situation, Avista did not model these specific projects. However, the IRP considers a generic expansion that represents a new pipeline build to Avista's service territories.

**In-Ground Storage**

In-ground storage provides advantages when gas from storage can be delivered to Avista's service territory city-gates. It enables deliveries of natural gas to customers during peak cold weather events. It also facilitates potentially lower-cost supply for customers by capturing peak/non-peak pricing differentials and potential arbitrage opportunities within individual months. Although additional storage can be a valuable resource, without deliverability to Avista's service territory, this storage cannot be an incremental firm peak serving resource.

**Jackson Prairie**

Jackson Prairie is a potential resource for expansion opportunities. Any future storage expansion capacity does not include transportation and therefore cannot be considered

## Chapter 4: Supply-Side Resources

an incremental peak day resource. However, Avista will continue to look for exchange and transportation release opportunities that could fully utilize these additional resource options. When an opportunity presents itself, Avista assesses if it makes sense from a financial impact to customers, as well as reliability. Even without deliverability, it can make financial sense to utilize Jackson Prairie capacity to optimize time spreads within the natural gas market and provide net revenue offsets to customer gas costs. There are no current plans for immediate expansion of Jackson Prairie.

**Other In-Ground Storage**

Other regional storage facilities exist and may be cost effective. Additional capacity at Northwest Natural's Mist facility, capacity at one of the Alberta area storage facilities, Questar's Clay Basin facility in northeast Utah, Ryckman Creek in Uinta County, Wyo., and northern California storage are all possibilities. Transportation to and from these facilities to Avista's service territories continues to be the largest impediment to these options. Avista will continue to look for exchange and transportation release opportunities while monitoring daily metrics of load, transport and market environment.

**LNG and CNG**

LNG is another resource option in Avista's service territories and is suited for meeting peak day or cold weather events. Satellite LNG uses natural gas that is trucked to the facilities in liquid form from an offsite liquefaction facility. Alternatively, small-scale liquefaction and storage may also be an effective resource option if gas supply during non-peak times is sufficient to build adequate inventory for peak events. Permitting issues notwithstanding, facilities could be located in optimal locations within the distribution system.

CNG is another resource option for meeting demand peaks and is operationally similar to LNG. Natural gas could be compressed offsite and delivered to a distribution supply point or compressed locally at the distribution supply point if sufficient natural gas supply and power for compression is available during non-peak times.

LNG and CNG supply resource options for LDCs are becoming more attractive as the market for LNG and CNG as alternative transportation fuels develops. The combined demand for peaking and transportation fuels can increase the volume and utilization of these resource assets thus lowering unit costs for the benefit of both market segments.

## Chapter 4: Supply-Side Resources

Estimates for LNG and CNG resources vary because of sizing and location issues. This IRP uses estimates from other facilities constructed in the area and from informal conversations with experts in the industry. Avista will monitor and refine the costs of developing LNG and CNG resources while considering lead time requirements and environmental issues.

**Plymouth LNG**

NWP owns and operates an LNG storage facility at Plymouth, Wash., which provides gas liquefaction, storage and vaporization service under its LS-1 and LS-2F tariffs. An example ratio of injection and withdrawal rates show that it can take more than 200 days to fill to capacity, but only 3-5 days to empty. As such, the resource is best suited for needle-peak demands. Incremental transportation capacity to Avista's service territories would have to be obtained in order for it to be an effective peaking resource.

This peaking resource is fully contracted and not available at this time. Given this situation, this option is not modeled in SENDOUT<sup>®</sup> for this IRP. However, because many of the current capacity holders are on one-year rolling evergreen contracts, it is possible this option will become viable in the future. As with other storage options, firm transportation from the facility would be required.

**Avista-Owned Liquefaction LNG**

Avista could construct a liquefaction LNG facility in the service area. Doing so could use excess transportation during off-peak periods to fill the facility, avoid tying up transportation during peak weather events, and it may avoid additional annual pipeline charges.

Construction would depend on regulatory and environmental approval as well as cost-effectiveness requirements. Preliminary estimates of the construction, environmental, right-of-way, legal, operating and maintenance, required lead times, and inventory costs indicate company-owned LNG facilities have significant development risks. Due to these risks, Avista did not include this resource in the IRP modeling.

**Biogas**

Biogas typically refers to a gas produced by the biological breakdown of organic matter in the absence of oxygen. Biogas can be produced by anaerobic digestion or fermentation of biodegradable materials such as biomass, manure or sewage, municipal

## Chapter 4: Supply-Side Resources

waste, green waste, and energy crops. This type of biogas is primarily methane and carbon dioxide.

Biogas is a renewable fuel, so it may qualify for renewable energy subsidies. Avista is not aware of any current subsidies, but future stimulus or energy policies could lead to some form of financial incentives.

Biogas projects are unique, so reliable cost estimates are difficult to obtain. Project sponsorship has many complex issues, and the more likely participation in such a project is as a long-term contracted purchaser. Avista did not consider biogas as a resource in this planning cycle, since they are small and insignificant compared to demand, but remains receptive to such projects as they are proposed.

## Supply Scenarios

This IRP includes two supply scenarios. Table 4.2 lists the supply scenarios and Appendix 4.2 provides the details on what is included in each of these scenarios. Additional details about the results of the supply scenarios are in Chapters 5 and 6.

**Table 4.2: Supply Scenarios**

Supply Scenarios
Existing Resources
Existing + Expected Available

- **Existing Resources:** This scenario represents all resources currently owned or contracted by Avista.
- **Existing + Expected Available:** In this scenario, existing resources plus supply resource options expected to be available when resource needs are identified. This includes currently available south and north bound GTN, capacity release recalls, NWP expansions and satellite LNG.

## Supply Issues

The abundance and accessibility of shale gas has fundamentally altered North American natural gas supply and the outlook for future natural gas prices. Even though

## Chapter 4: Supply-Side Resources

the supply is available and the technology exists to access it, there are issues that can affect the cost and availability of natural gas.

**Hydraulic Fracturing**

Improvements in hydraulic fracturing, a 60-year-old technique used to extract oil and natural gas from shale rock formations, coupled with horizontal drilling has enabled access to previously uneconomic resources. However, the process does not come without challenges. The publicity caused by movies, documentaries and articles in national newspapers about “fracking” has plagued the natural gas and oil industry. There is worry that hydraulic fracturing is contaminating aquifers, increasing air pollution and causing earthquakes. The wide-spread publicity generated interest in the production process and caused some states to issue bans or moratoriums on drilling until further research was conducted.

Government, industry and universities engaged in studies to understand the actual and potential impacts of hydraulic fracturing. Industry has been working to refute these claims by focusing on ensuring companies use best practices for well drilling, disclosing the fluids used in the hydraulic fracturing processing, and implementing “green completions” for wells. State governments are participating in independent audits of their regulations to ensure that proper oversight is in place. The outcome of these audits, studies and research could greatly affect the cost and availability of natural gas and oil.

**Pipeline Availability**

The Pacific Northwest has efficiently utilized its relatively sparse network of pipeline infrastructure to meet the regions needs. As the amount of renewable energy increases, future demand for natural gas-fired generation will increase. Pipeline capacity is the link between natural gas and power.

Adding additional pressure to existing pipeline resources is the announcement of three methanol plants in the region. The plants use large amounts of natural gas as a feedstock for creating methanol, which is used to make other chemicals and as a fuel.

LDCs will have to compete with power generators, LNG exporters and other large end users for limited pipeline capacity. The new mix could alter current pipeline operations and the potential availability of infrastructure to the region.

**Action Items**

Without resource deficiencies or a need to acquire incremental supply-side resources to meet peak day demands, Avista’s focus will only include normal activities in the near term, including:

## Chapter 4: Supply-Side Resources

- Continue to monitor supply resource trends including the availability and price of natural gas to the region, exporting LNG (specifically on the Oregon coast) Canadian natural gas imports, regional plans for natural gas-fired generation and its affect on pipeline availability, and regional pipeline and storage infrastructure plans
- Avista will also monitor new resource lead-time requirements relative to when resources are needed to preserve resource option flexibility

**Conclusion**

Avista is committed to providing reliable supplies of natural gas to its customers. Avista procures supplies with a diversified plan that seeks to acquire natural gas supplies while reducing exposure to short-term price volatility through a strategy that includes hedging, storage utilization and index purchases. The supply mix includes long-term contracts for firm pipeline transportation capacity from many supply points and ownership and leasing of firm natural gas storage capacity sufficient to serve customer demand during peak weather events and throughout the year.

## 5: Integrated Resource Portfolio

### Overview

This chapter combines the previously discussed IRP components and the model used to determine resource deficiencies during the 20-year planning horizon. Although not the case in this IRP, this chapter also provides an analysis of potential resource options to meet resource deficiencies when they exist.

The foundation for integrated resource planning is the criteria used for developing demand forecasts. Avista uses the coldest day on record as its weather-planning standard for determining peak-day demand. This is consistent with past IRPs and as described in Chapter 2 – Demand Forecasts. This IRP utilizes coldest day on record and average weather data for each demand region for this IRP. Avista plans to serve expected peak day in each demand region with firm resources. Firm resources include natural gas supplies, firm pipeline transportation and storage resources. In addition to peak requirements, Avista also plans for non-peak periods such as winter, shoulder and summer demand. The modeling process includes running a daily optimization for every day of the 20-year planning period.

It is assumed that on a peak day all interruptible customers have left the system in order to provide service to firm customers. Avista does not make firm commitments to serve interruptible customers. Therefore, our IRP analysis of demand-serving capabilities only focuses on the residential, commercial and firm industrial classes. It is Avista's belief that using coldest day on record weather criteria, a blended price curve developed by industry experts, and an academically backed customer forecast all work together to develop stringent planning criteria.

Forecasted demand represents the amount of natural gas supply needed. In order to deliver the forecasted demand, the supply forecast needs to be increased between 1.0 percent and 3.0 percent on both an annual and peak-day basis to account for additional supplies that are purchased primarily for pipeline compressor station fuel. The 1.0 percent to 3.0 percent, known as fuel, varies depending on the pipeline. The FERC and National Energy Board approved tariffs govern the percentage of required additional fuel supply.

### SENDOUT® Planning Model

The SENDOUT® Gas Planning System from Ventyx performs integrated resource optimization. The SENDOUT® model was purchased in April 1992 and has been used in preparing all IRPs since then. Avista has a long-term maintenance agreement with

## Chapter 5: Integrated Resource Portfolio

Ventyx for software updates and enhancements. Enhancements include software corrections and improvements brought on by industry needs.

SENDOUT® is a linear programming model widely used to solve natural gas supply and transportation optimization questions. Linear programming is a proven technique used to solve minimization/maximization problems. SENDOUT® analyzes the complete problem at one time within the study horizon, while accounting for physical limitations and contractual constraints.


The software analyzes thousands of variables and evaluates possible solutions to generate a least cost solution. The model uses the following variables:

- Demand data, such as customer count forecasts and demand coefficients by customer type (e.g., residential, commercial and industrial).
- Weather data, including minimum, maximum and average temperatures.
- Existing and potential transportation data which describes the network for physical movement of natural gas and associated pipeline costs.
- Existing and potential supply options including supply basins, revenue requirements as the key cost metric for all asset additions and prices.
- Natural gas storage options with injection/withdrawal rates, capacities and costs.
- DSM potential.

Figure 5.1 is a SENDOUT® network diagram of Avista's demand centers and resources. This diagram illustrates current transportation and storage assets, flow paths and constraint points.

Chapter 5: Integrated Resource Portfolio

Figure 5.1 SENDOUT® Model Diagram

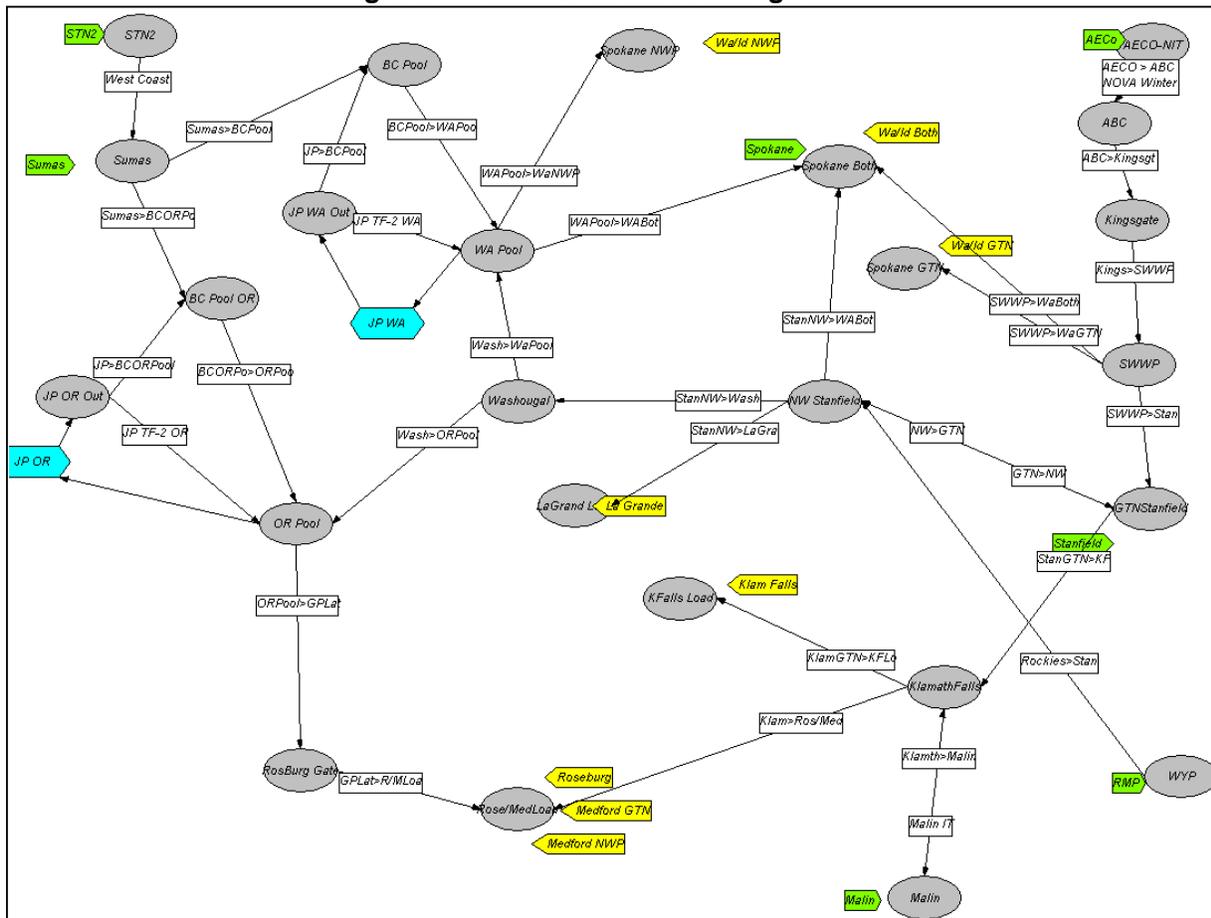

The SENDOUT® model also provides a flexible tool to analyze potential scenarios such as:

- Pipeline capacity needs and capacity releases.
- Effects of different weather patterns upon demand.
- Effects of natural gas price increases upon total natural gas costs.
- Storage optimization studies.
- Resource mix analysis for DSM.
- Weather pattern testing and analysis.

## Chapter 5: Integrated Resource Portfolio

- Transportation cost analysis.
- Avoided cost calculations.
- Short-term planning comparisons.

SENDOUT® also includes Monte Carlo capabilities, which facilitates price and demand uncertainty modeling and detailed portfolio optimization techniques to produce probability distributions. More information and analytical results are located in Chapter 6 – Alternate Scenarios, Portfolios and Stochastic Analysis.

## Resource Integration

This IRP defines the planning methodologies, describes the modeling tools and identifies existing and potential resources. The following summarizes the comprehensive analysis bringing demand forecasting and existing and potential supply and demand-side resources together to form the 20-year, least-cost plan.


### Demand Forecasting

Chapter 2 - Demand Forecasts describes Avista's demand forecasting approach.

Avista forecasts demand in the SENDOUT® model in eight service areas given the existence of distinct weather and demand patterns for each area and pipeline infrastructure dynamics. The SENDOUT® areas are Washington/Idaho (disaggregated into three sub-areas because of pipeline flow limitations); Medford (disaggregated into two sub-areas because of pipeline flow limitations); and Roseburg, Klamath Falls and La Grande. In addition to area distinction, Avista also models demand by customer class within each area. The relevant customer classes are residential, commercial and firm industrial customers.

Customer demand is highly weather-sensitive. Avista's customer demand is not only highly seasonable, but also highly variable. Figure 5.2 captures this variability showing monthly system-wide average demand, minimum demand day observed by month, maximum demand day observed in each month, and winter projected peak day demand for the first year of the Expected Case forecast as determined in SENDOUT®.

## Chapter 5: Integrated Resource Portfolio

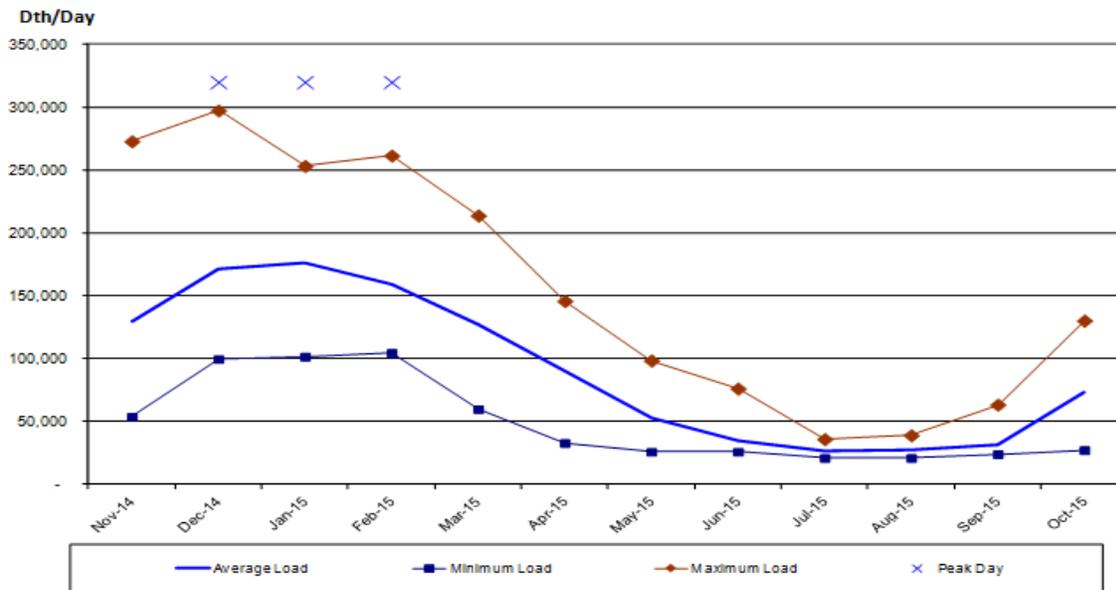**Figure 5.2: Total System Average Daily Load (Average, Minimum, Maximum)****Natural Gas Price Forecasts**

Natural gas prices are a fundamental component of the IRP. The commodity price is a significant component of the total cost of a resource option. This affects the avoided cost threshold for determining cost-effectiveness of conservation measures. The price of natural gas influences consumption, so price elasticity is part of the demand evaluation (see Chapter 2 – Demand Forecasts).


The natural gas price outlook has changed dramatically in recent years in response to several influential events and trends affecting the industry. The recent recession, shale gas production, green house gas issues, and renewable energy standards creating the potential for more natural gas-fired generation impact the natural gas outlook. Due to the rapidly changing environment and uncertainty in predicting future events and trends, modeling a range of forecasts is necessary.

Many additional factors influence natural gas pricing and volatility, such as regional supply/demand issues, weather conditions, hurricanes/storms, storage levels, natural gas-fired generation, infrastructure disruptions, and infrastructure additions (e.g. new pipelines and LNG terminals).

Even though Avista continually monitors these factors, we cannot accurately predict future prices for the 20-year horizon of this IRP. This IRP reviewed several price forecasts from credible sources. Figure 5.3 depicts the price forecasts considered in the IRP analyses.

## Chapter 5: Integrated Resource Portfolio

Figure 5.3: Henry Hub Forecasted Price (Real \$/Dth)

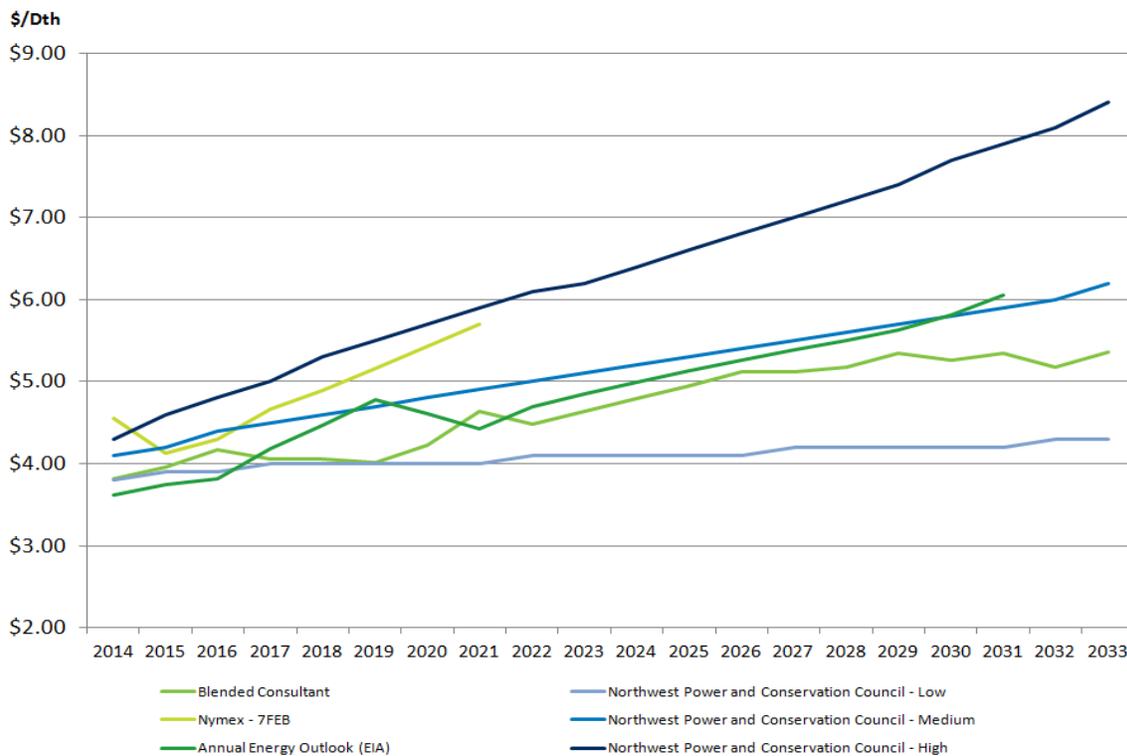

Selecting the price curves can be more art than science. With the assistance of the TAC, Avista selected high, expected and low price curves to consider possible outcomes and their impact on resource planning. The expected curve was a 50 / 50 blended price derived from consulting services subscriptions with the high and low bounding the expected curve with industry experts' opinions. The selected price curves have variation and provide reasonable upper and lower bounds, consistent with stretching modeling assumptions to address uncertainty in the planning environment. These curves are in real dollars in Figure 5.4 and nominal dollars in Figure 5.5. Additionally, stochastic modeling of natural gas prices is also completed. The results from that analysis are in Chapter 6 – Alternate Scenarios, Portfolios and Stochastic Analysis.

Chapter 5: Integrated Resource Portfolio

Figure 5.4 Henry Hub Forecasts for IRP Low/ Medium/ High Forecasted Price – Real \$/Dth


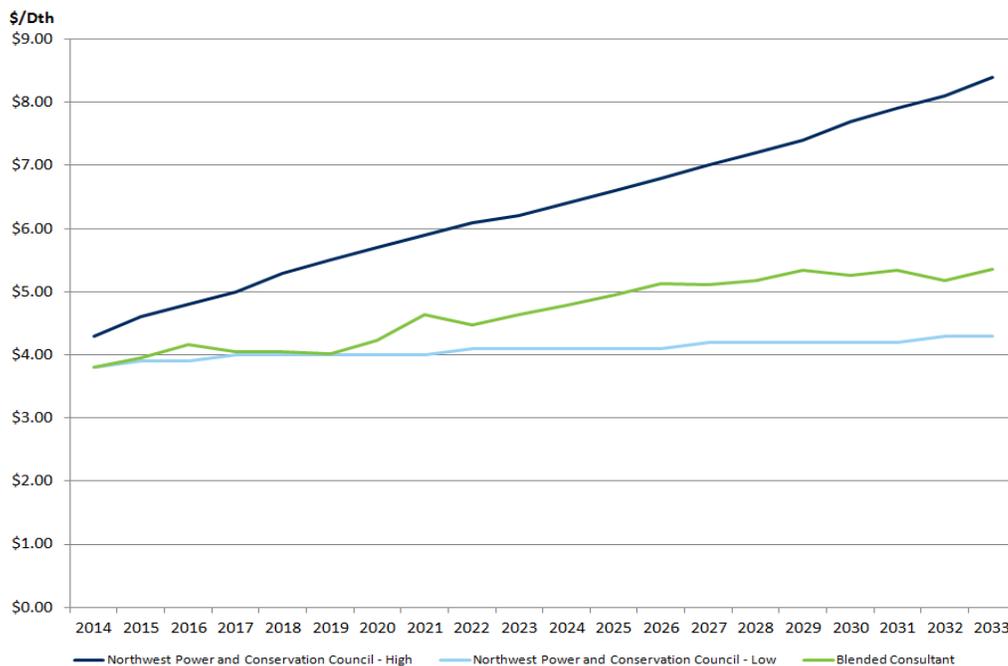


Figure 5.5: Low / Medium / High Forecasted Price – Nominal \$/Dth

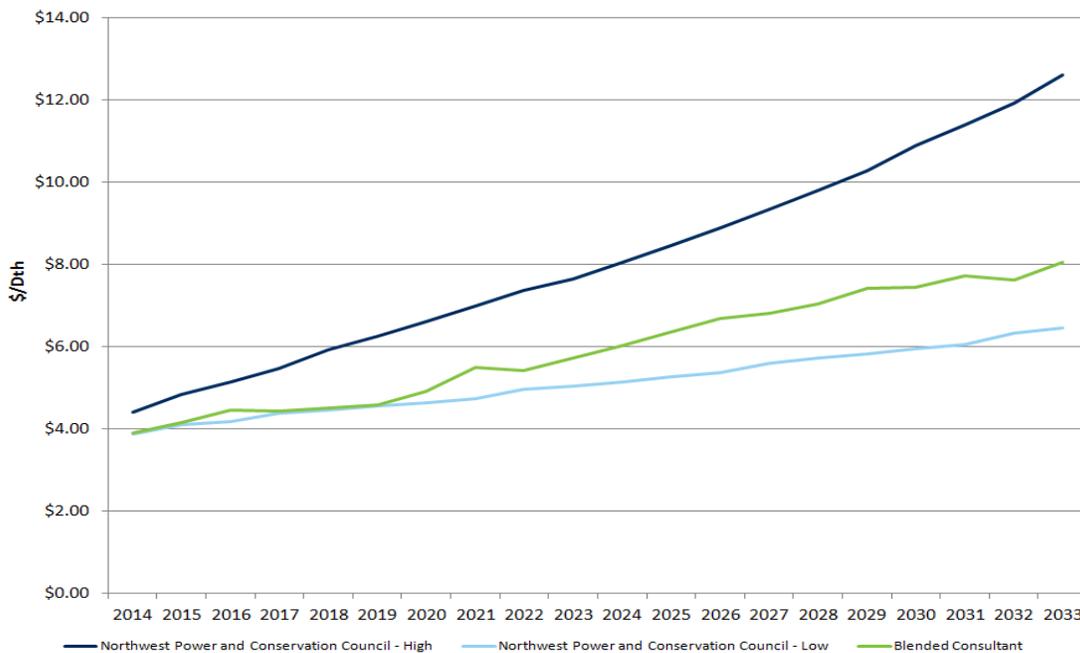

## Chapter 5: Integrated Resource Portfolio

Each of the price forecasts above are for Henry Hub, which is located in Louisiana just onshore from the Gulf of Mexico. Henry Hub is recognized as the most important pricing point in the U.S. because of its proximity to a large portion of U.S. natural gas production and the sheer volume traded in the daily or spot market, as well as the forward markets via the New York Mercantile Exchange's (NYMEX) futures contracts. Consequently, all other trading points tend to be priced off of the Henry Hub.

The primary physical supply points at Sumas, AECO and the Rockies (and other secondary regional market hubs) determine Avista's costs. Prices at these points typically trade at a discount, or negative basis differential, to Henry Hub because of their proximity to the two largest natural gas basins in North America (the WCSB and the Rockies).

Table 5.1 shows the Pacific Northwest regional prices from the consultants, historic averages and the prior IRP as a percent of Henry Hub price, along with three-year historical comparisons.

**Table 5.1: Regional Price as a Percent of Henry Hub Price**

	<b>AECO</b>	<b>Sumas</b>	<b>Rockies</b>	<b>Malin</b>	<b>Stanfield</b>
<b>Consultant1 Forecast Average</b>	91.9%	101.4%	99.2%	105.3%	102.7%
<b>Consultant2 Forecast Average</b>	84.9%	93.6%	91.6%	97.3%	94.8%
<b>Historic Cash Three-Year Average</b>	87.4%	98.4%	116.4%	99.2%	97.5%
<b>2012 IRP</b>	88.60%	89.90%	90.80%	92.30%	91.40%

This IRP used monthly prices for modeling purposes because of Avista's winter-weighted demand profile. Table 5.2 depicts the monthly price shape used in this IRP. A slight change to the shape of the pricing curve occurred since the last IRP. Driven primarily by supply availability, the forecasted differential between winter and summer pricing has come in to some extent when compared to historic data.

## Chapter 5: Integrated Resource Portfolio

**Table 5.2: Monthly Price as a Percent of Average Price**

	<b>Jan</b>	<b>Feb</b>	<b>Mar</b>	<b>Apr</b>	<b>May</b>	<b>Jun</b>
Consult 1	101%	102%	102%	99%	99%	99%
Consult 2	104%	104%	97%	96%	97%	98%
Prior IRP	101%	101%	98%	98%	98%	100%
	<b>Jul</b>	<b>Aug</b>	<b>Sep</b>	<b>Oct</b>	<b>Nov</b>	<b>Dec</b>
Consult 1	99%	100%	101%	100%	100%	100%
Consult 2	99%	100%	99%	99%	102%	106%
Prior IRP	102%	103%	100%	100%	100%	102%

Avista selected a blend of Consultant 1 and Consultant 2's forecast of regional prices and monthly shapes. Appendix 5.1 contains detailed monthly price data behind the summary table information discussed above.

### **Transportation and Storage**

Valuing natural gas supplies is a critical first step in resource integration. Equally important is capturing all costs to deliver the natural gas to customers. Daily capacity of existing transportation resources (described in Chapter 4 – Supply-Side Resources) is represented by the firm resource duration curves depicted in Figures 5.6 and 5.7.

Chapter 5: Integrated Resource Portfolio

Figure 5.6: Existing Firm Transportation Resources – Washington/Idaho


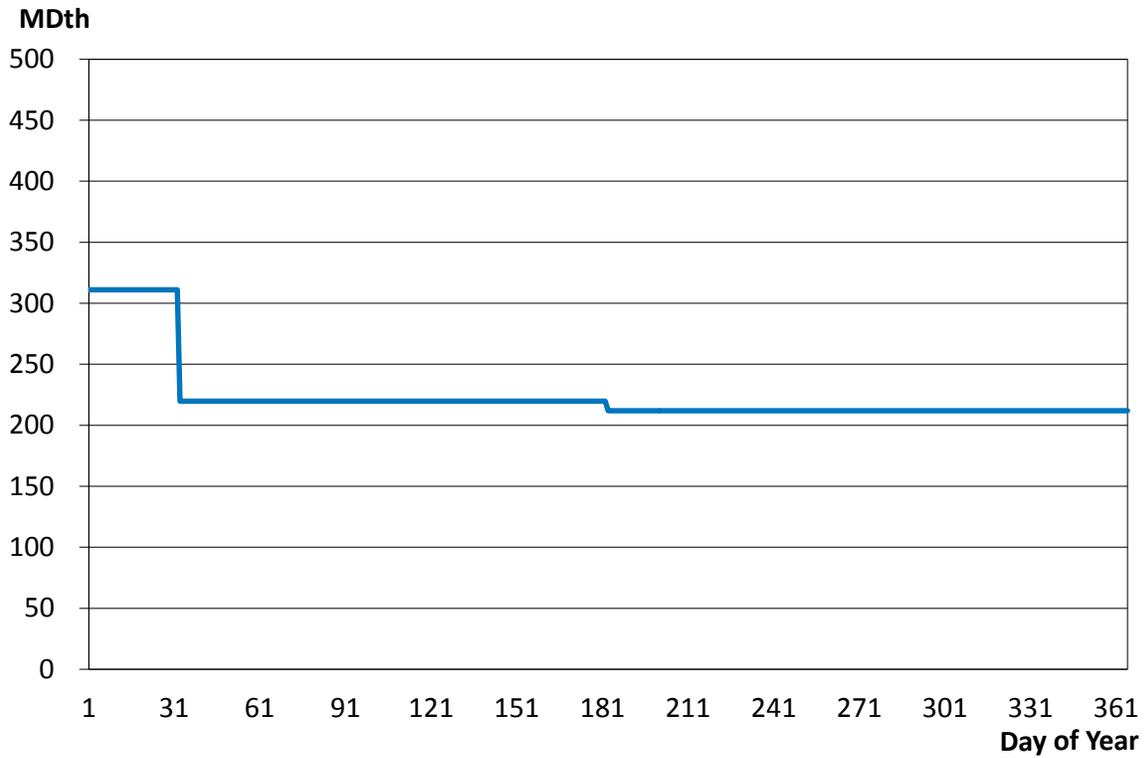


Figure 5.7: Existing Firm Transportation Resources – Oregon

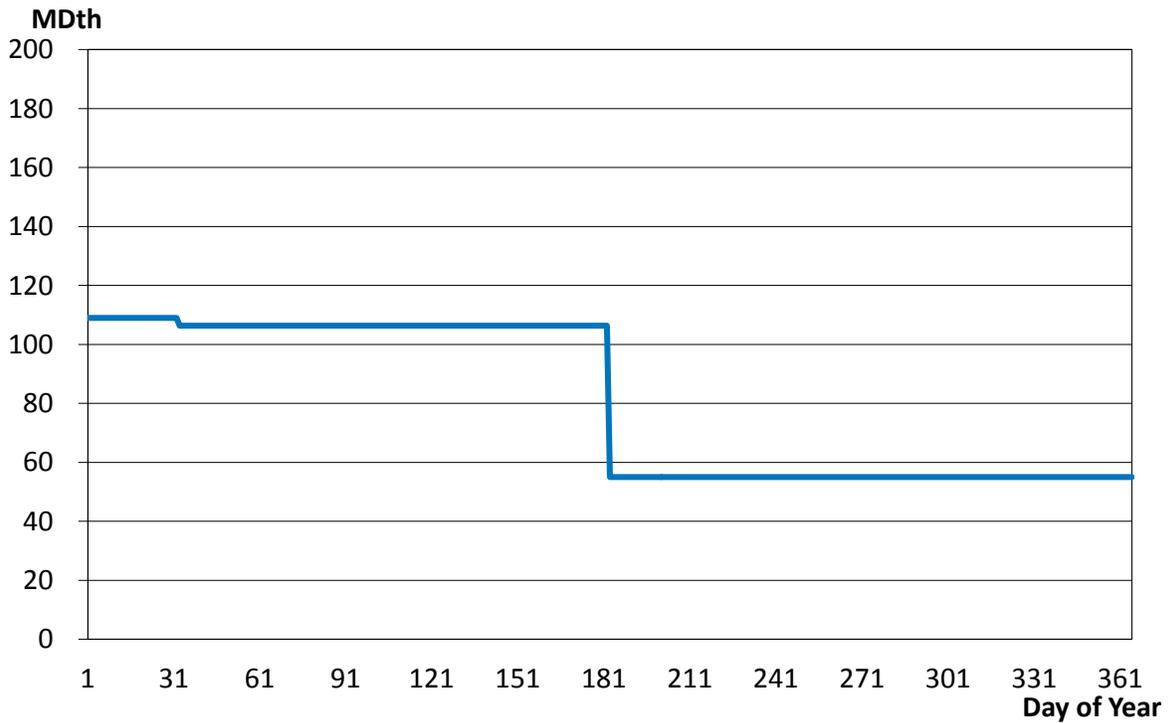

## Chapter 5: Integrated Resource Portfolio

Current rates for capacity are in Appendix 5.1. Forecasting future pipeline rates can be a challenge because of the need to estimate the amount and timing of rate changes. Avista's estimates and timing of future pipeline rate increases are based on knowledge obtained from industry discussions and participation in various pipeline rate cases. This IRP assumes that pipelines will file to recover costs at rates equal to increases in GDP (see Appendix 5.2 – General Assumptions).

### **Demand-Side Management**

Chapter 3 – Demand-Side Resources describes the methodology used to identify conservation potential and the interactive process that utilizes avoided cost thresholds for determining the cost effectiveness of conservation measures on an equivalent basis with supply-side resources.


### **Preliminary Results**

After incorporating the above data into the SENDOUT® model, Avista generated an assessment of demand compared to existing resources for several scenarios. Chapter 2 – Demand Forecasts discusses the demand results from these cases, with additional details in Appendices 2.1 through 2.10.


Figures 5.8 through 5.11 provide graphic summaries of Average Case demand compared to existing resources. This demand is net of DSM savings and shows the adequacy of Avista's resources under normal weather conditions. For this case, current resources meet demand needs over the planning horizon.

Chapter 5: Integrated Resource Portfolio

**Figure 5.8: Average Case – Washington/Idaho Existing Resources vs. Peak Day Demand – February 15th**

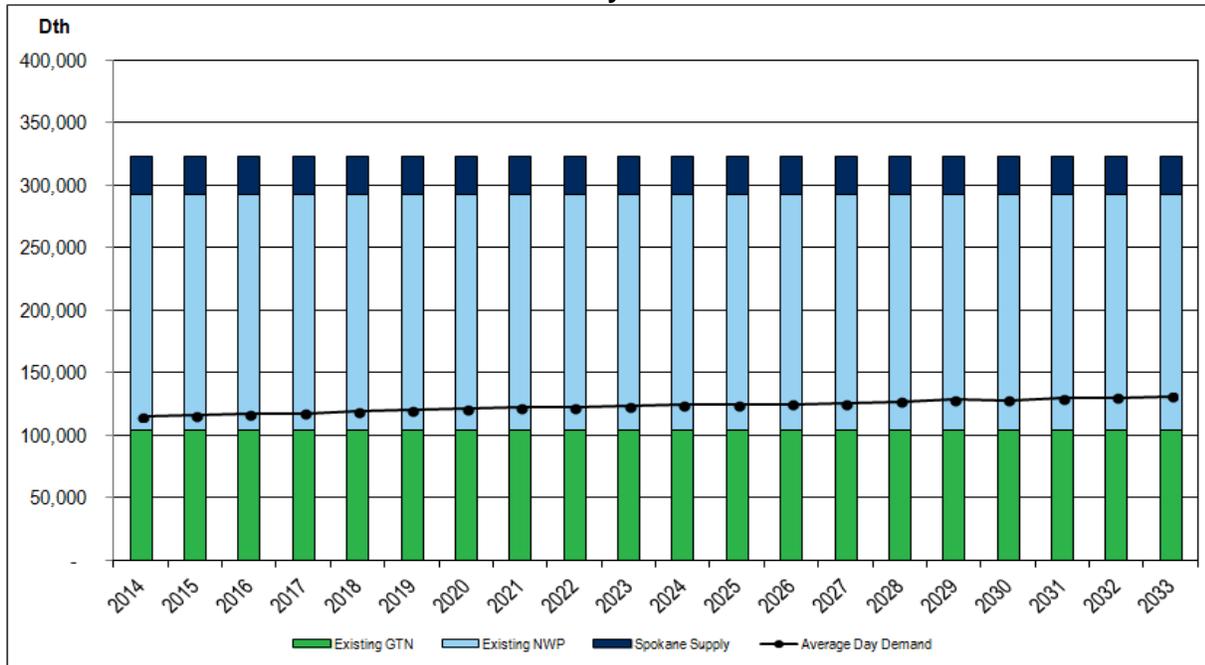


**Figure 5.9: Average Case – Medford / Roseburg Existing Resources vs. Peak Day Demand – December 20th**

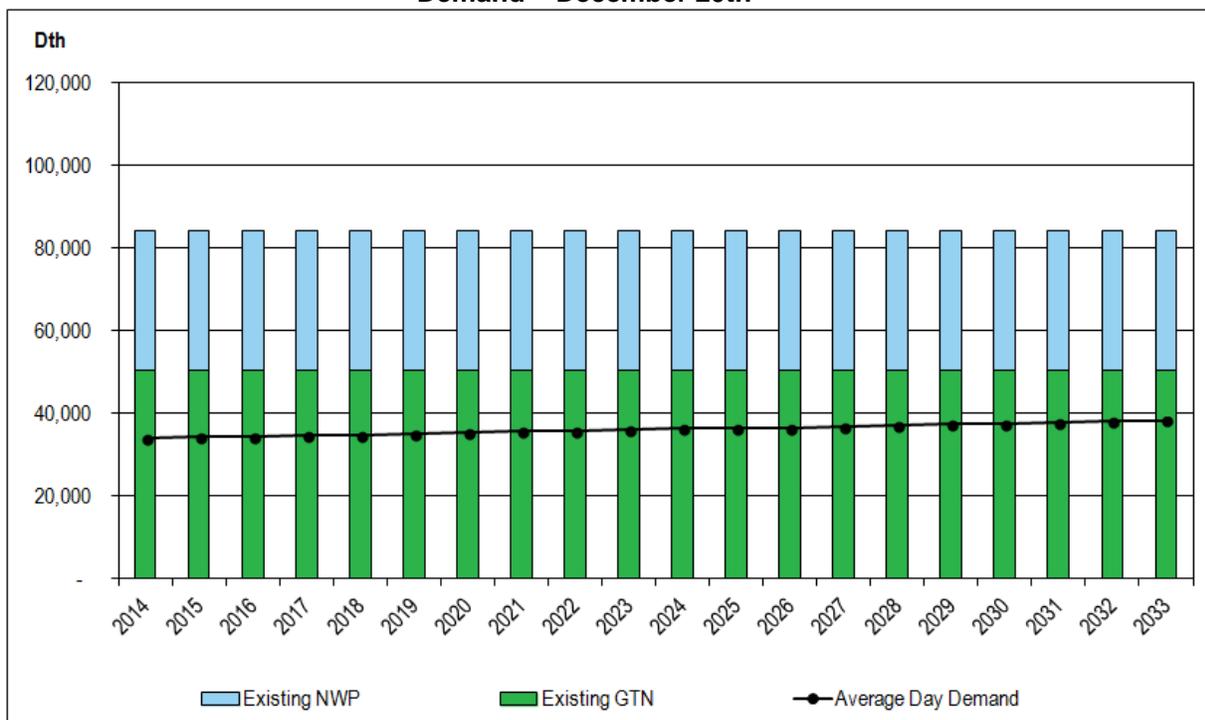


Chapter 5: Integrated Resource Portfolio

**Figure 5.10: Average Case – Klamath Falls Existing Resources vs. Peak Day Demand – December 20th**

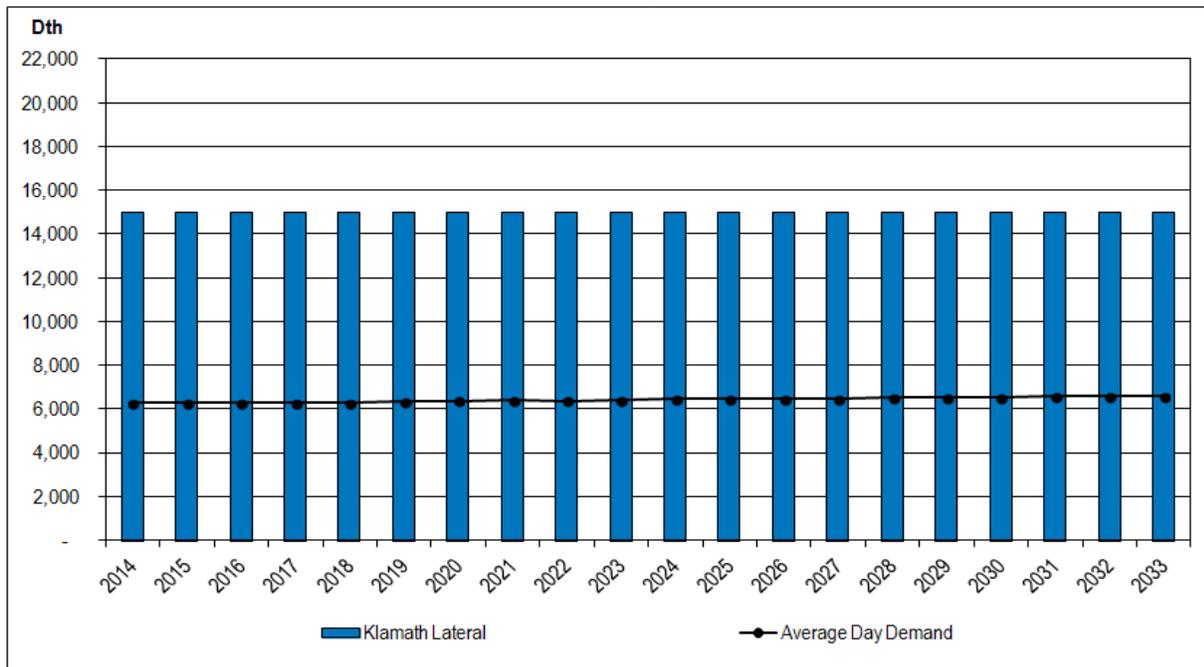


**Figure 5.11: Average Case – La Grande Existing Resources vs. Peak Day Demand – February 15th**

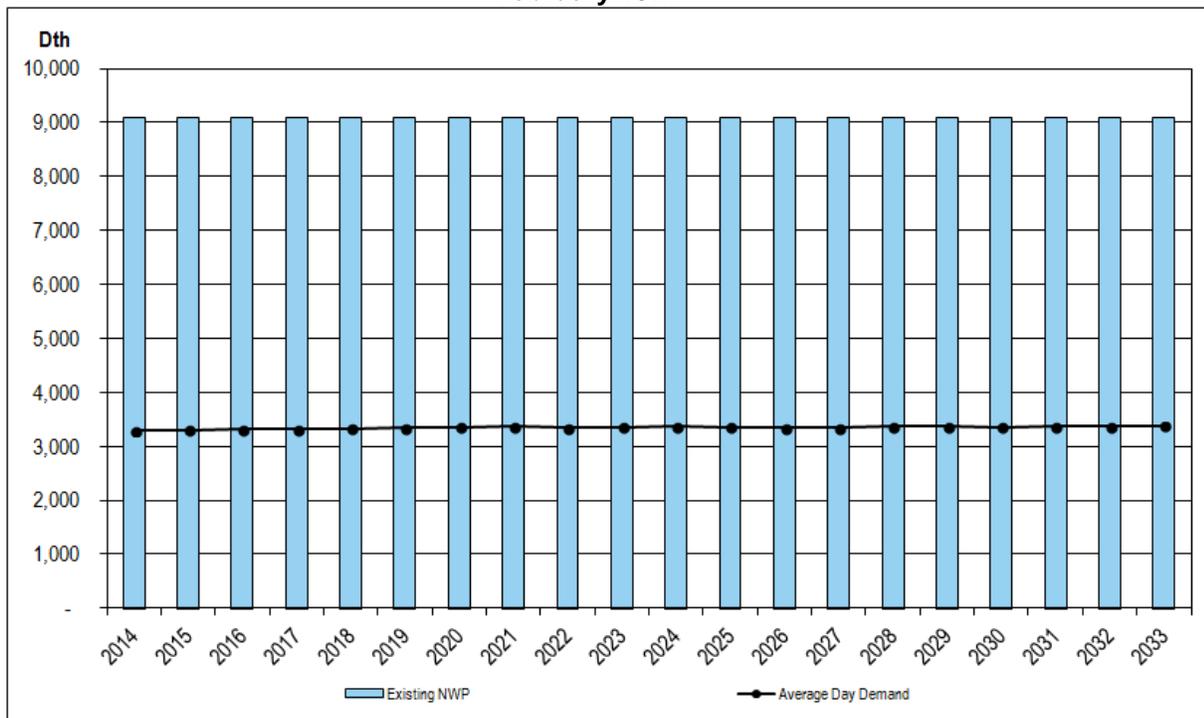

Chapter 5: Integrated Resource Portfolio


Figures 5.12 through 5.15 provide graphic summaries of Expected Case peak day demand compared to existing resources, as well as demand comparisons to the 2012 IRP. This demand is net of DSM savings. For this case, existing resources meet peak day demand needs over the planning horizon. This surplus resource situation provides ample time to carefully monitor, plan and act on potential resource additions.

**Figure 5.12: Expected Case – Washington/Idaho Existing Resources vs. Peak Day Demand – February 15th**

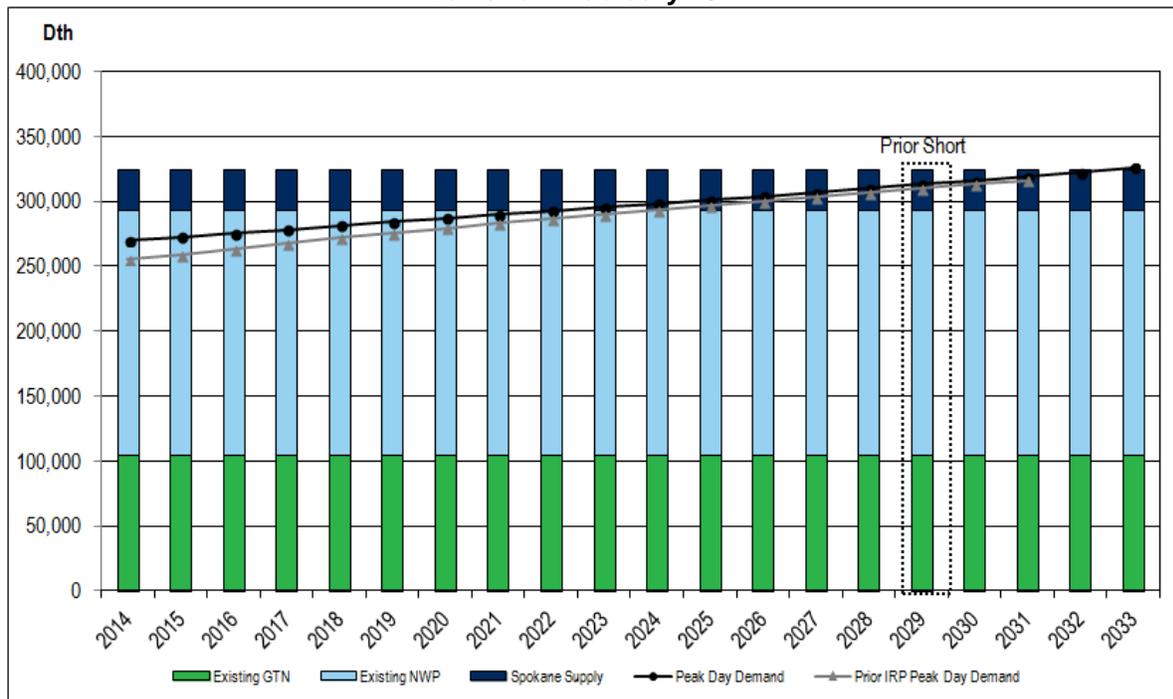


Chapter 5: Integrated Resource Portfolio

**Figure 5.13: Expected Case – Medford / Roseburg Existing Resources vs. Peak Day Demand – December 20th**

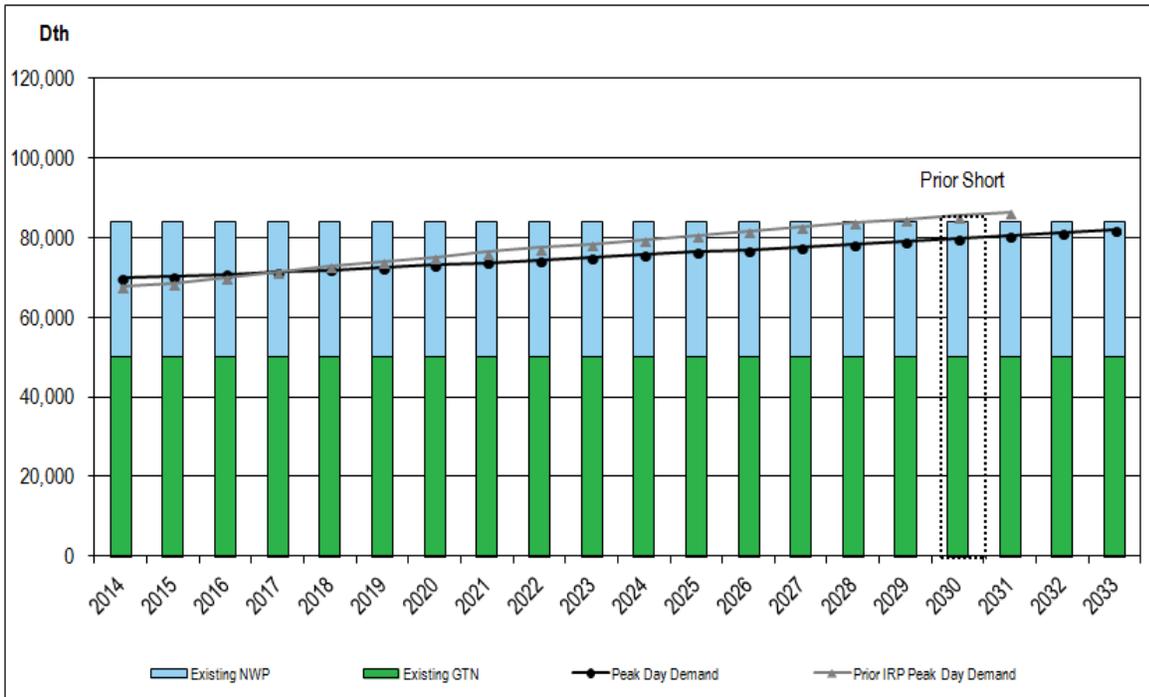


**Figure 5.14: Expected Case – Klamath Falls Existing Resources vs. Peak Day Demand – December 20th**

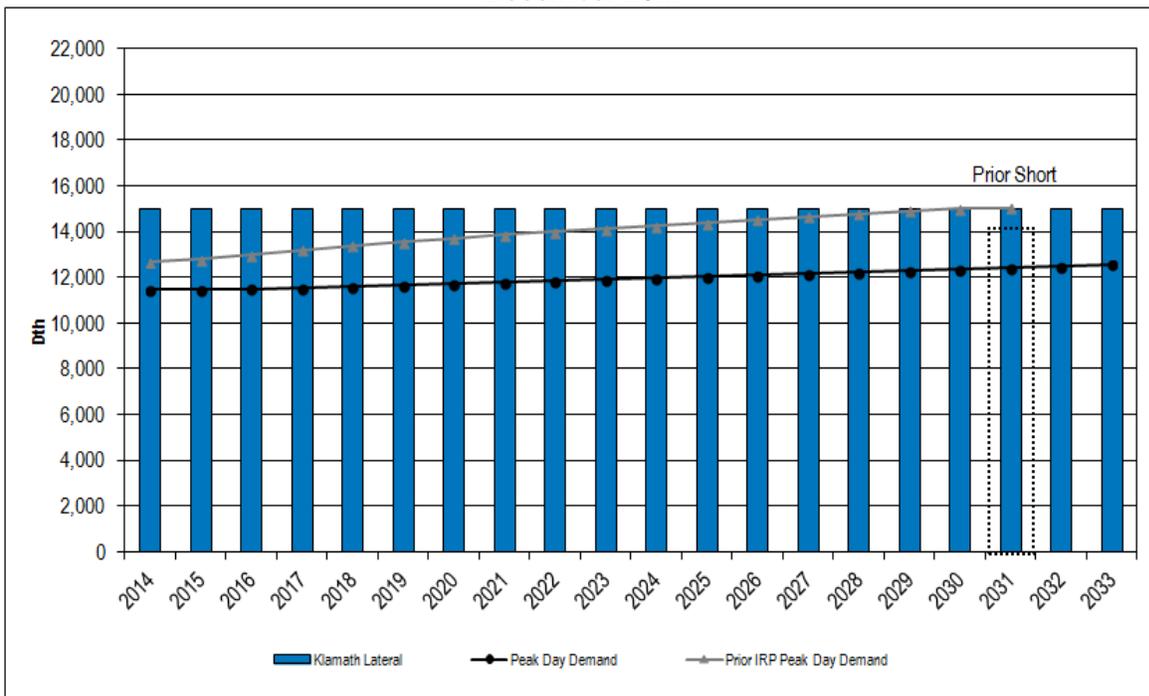

Chapter 5: Integrated Resource Portfolio

**Figure 5.15: Expected Case – La Grande Existing Resources vs. Peak Day Demand – February 15th**

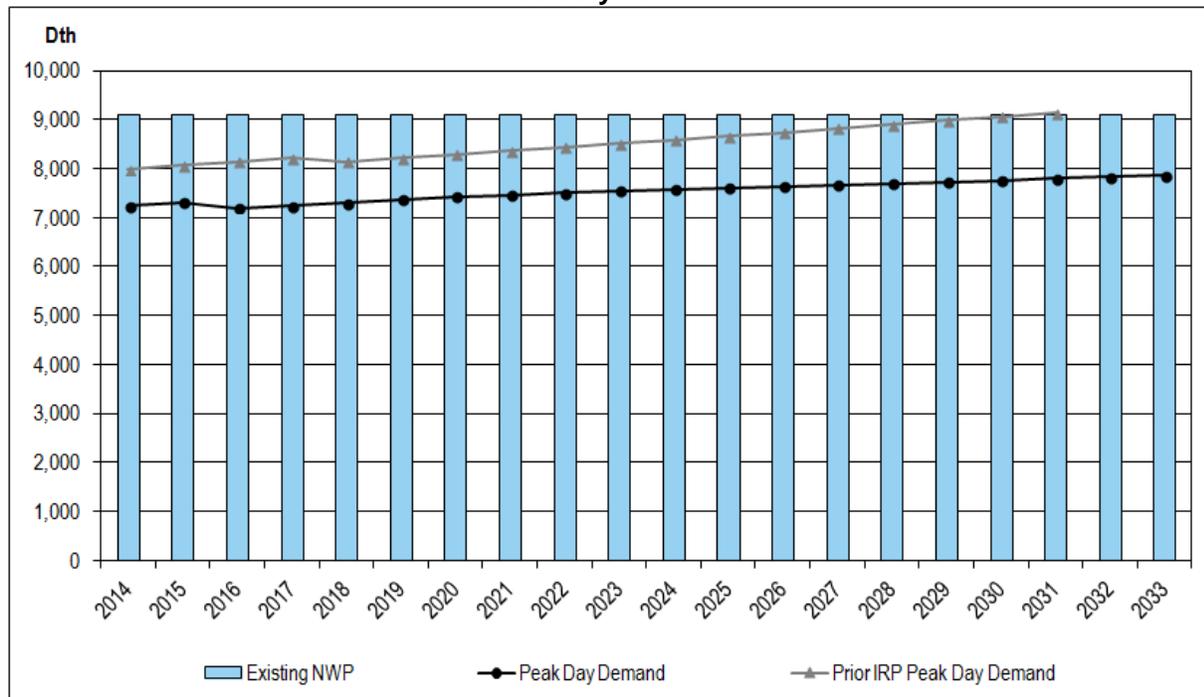

If demand grows faster than expected, the need for new resources will come earlier. “Flat demand risk” requires close monitoring for signs of increasing demand and evaluation of lead times to acquire preferred incremental resources. Monitoring of “flat demand risk” includes a reconciliation of forecasted demand to actual demand on a monthly basis. This reconciliation helps identify customer growth trends and use-per-customer trends. If they meaningfully differ compared to forecasted trends, Avista will assess the impacts on planning from procurement and resource sufficiency standing.

Table 5.3 quantifies the forecasted total demand net of DSM savings and un-served demand from the above charts.

## Chapter 5: Integrated Resource Portfolio

Table 5.3: Peak Day Demand – Served and Unserved (MDth/d)

Case	Year	LaGrande				WA/ID			
		LaGrande Served	LaGrande Unserved	LaGrande Total	LaGrande % of Peak Day Served	WA/ID Served	WA/ID Unserved	WA/ID Total	WA/ID % of Peak Day Served
Expected	2014	7.36	-	7.36	100%	270.11	0	270.11	100%
Expected	2015	7.39	-	7.39	100%	272.87	0	272.87	100%
Expected	2016	7.43	-	7.43	100%	275.55	0	275.55	100%
Expected	2017	7.40	-	7.40	100%	276.08	0	276.08	100%
Expected	2018	7.44	-	7.44	100%	279.16	0	279.16	100%
Expected	2019	7.47	-	7.47	100%	281.91	0	281.91	100%
Expected	2020	7.50	-	7.50	100%	284.69	0	284.69	100%
Expected	2021	7.51	-	7.51	100%	286.61	0	286.61	100%
Expected	2022	7.45	-	7.45	100%	285.97	0	285.97	100%
Expected	2023	7.47	-	7.47	100%	288.42	0	288.42	100%
Expected	2024	7.50	-	7.50	100%	291.26	0	291.26	100%
Expected	2025	7.47	-	7.47	100%	291.84	0	291.84	100%
Expected	2026	7.44	-	7.44	100%	292.39	0	292.39	100%
Expected	2027	7.45	-	7.45	100%	294.28	0	294.28	100%
Expected	2028	7.48	-	7.48	100%	297.18	0	297.18	100%
Expected	2029	7.51	-	7.51	100%	300.11	0	300.11	100%
Expected	2030	7.45	-	7.45	100%	299.63	0	299.63	100%
Expected	2031	7.48	-	7.48	100%	302.58	0	302.58	100%
Expected	2032	7.48	-	7.48	100%	304.17	0	304.17	100%
Expected	2033	7.49	-	7.49	100%	306.36	0	306.36	100%

Case	Year	Klamath Falls				Medford/Roseburg			
		Klamath Falls Served	Klamath Falls Unserved	Klamath Falls Total	Klamath Falls % of Peak Day Served	Medford/Roseburg Served	Medford/Roseburg Unserved	Medford/Roseburg Total	Medford/Roseburg % of Peak Day Served
Expected	2014	11.45	-	11.45	100%	69.82	0	69.82	100%
Expected	2015	11.46	-	11.46	100%	70.38	0	70.38	100%
Expected	2016	11.50	-	11.50	100%	70.92	0	70.92	100%
Expected	2017	11.46	-	11.46	100%	70.90	0	70.90	100%
Expected	2018	11.52	-	11.52	100%	71.49	0	71.49	100%
Expected	2019	11.58	-	11.58	100%	72.10	0	72.10	100%
Expected	2020	11.66	-	11.66	100%	72.79	0	72.79	100%
Expected	2021	11.70	-	11.70	100%	73.27	0	73.27	100%
Expected	2022	11.64	-	11.64	100%	73.10	0	73.10	100%
Expected	2023	11.70	-	11.70	100%	73.72	0	73.72	100%
Expected	2024	11.78	-	11.78	100%	74.43	0	74.43	100%
Expected	2025	11.76	-	11.76	100%	74.58	0	74.58	100%
Expected	2026	11.75	-	11.75	100%	74.71	0	74.71	100%
Expected	2027	11.79	-	11.79	100%	75.19	0	75.19	100%
Expected	2028	11.87	-	11.87	100%	75.92	0	75.92	100%
Expected	2029	11.94	-	11.94	100%	76.66	0	76.66	100%
Expected	2030	11.89	-	11.89	100%	76.54	0	76.54	100%
Expected	2031	11.96	-	11.96	100%	77.28	0	77.28	100%
Expected	2032	11.99	-	11.99	100%	77.68	0	77.68	100%
Expected	2033	12.04	-	12.04	100%	78.24	0	78.24	100%

## Chapter 5: Integrated Resource Portfolio

**New Resource Options**

When existing resources are not sufficient to meet expected demand, there are many important considerations in determining the appropriateness of potential resources. Interruptible customers' transportation may be cut, as needed, when existing resources are not sufficient to meet firm customers demand.

**Resource Cost**

Resource cost is the primary consideration when evaluating resource options, although other factors mentioned below also influence resource decisions. Newly constructed resources are typically more expensive than existing resources, but existing resources are in shorter supply. Newly constructed resources provided by a third party, such as a pipeline, may require a significant contractual commitment. Newly constructed resources are often less expensive per unit, if a larger facility is constructed, because of economies of scale.

**Lead Time Requirements**

New resource options can take from one to five or more years to put in service. Open season processes, planning and permitting, environmental review, design, construction, and testing are some of the aspects contributing to lead time requirements for new facilities. Recalls of released pipeline capacity typically require advance notice of up to one year. Even DSM programs can require significant time from program development and rollout to the realization of natural gas savings.

**Peak versus Base Load**

Avista's planning efforts include the ability to serve firm natural loads on a peak day, as well as all other demand periods. Avista's core loads are considerably higher in the winter than the summer. Due to the winter-peaking nature of Avista's demand, resources that cost-effectively serve the winter without an associated summer commitment may be preferable. Alternatively, it is possible that the costs of a winter-only resource may exceed the cost of annual resources after capacity release or optimization opportunities are considered.

**Resource Usefulness**

Available resource must effectively deliver natural gas to the intended region. Given Avista's unique service territories, it is often impossible to deliver resources from a

## Chapter 5: Integrated Resource Portfolio

resource option such as storage without acquiring additional pipeline transportation. Pairing resources increases cost. Other key factors that can contribute to the usefulness of a resource are viability and reliability. If the potential resource is either not available currently (e.g., new technology) or not reliable on a peak day (e.g., firm), they may not be considered as an option for meeting unserved demand.

### **“Lumpiness” of Resource Options**

Newly constructed resource options are often “lumpy.” This means that new resources may only be available in larger-than-needed quantities and only available every few years. This lumpiness of resources is driven by the cost dynamics of new construction, where lower unit costs are available with larger expansions and the economics of expansion of existing pipelines or the construction of new resources dictate additions infrequently. Lumpiness provides a cushion for future growth. Economies of scale for pipeline construction afford the opportunity to secure resources to serve future demand increases.

### **Competition**

LDCs, end-users and marketers compete for regional resources. The Northwest has been efficient in the utilization of existing resources and has an appropriately sized system. Currently, the region can accommodate the regional demand needs. However, future needs vary, and regional LDCs may find they are competing with each other and other parties to secure firm resources for customers.

### **Risks and Uncertainties**

Investigation, identification, and assessment of risks and uncertainties are critical considerations when evaluating supply resource options. For example, resource costs are subject to degrees of estimation, partly influenced by the expected timeframe of the resource need and rigor determining estimates, or estimation difficulties because of the uniqueness of a resource. Lead times can have varying degrees of certainty ranging from securing currently available transport (high certainty) to building underground storage (low certainty).

### **Resource Selection**

After identifying supply-side resource options and evaluating them based on the above considerations, Avista entered the supply-side scenarios (see Table 5.2) and

## Chapter 5: Integrated Resource Portfolio

conservation measures (see Chapter 3 – Demand-Side Resources) into the SENDOUT® model for it to select the least cost approach to meeting resource deficiencies, if they exist. SENDOUT® compares demand-side and supply-side resources (see Appendix 5.3 for a list of supply-side resource options) using PVRR analysis to determine which resource is a best option/least cost resource.

## Demand-Side Resources

### Integration by Price

As described in Chapter 3, the model runs without future DSM programs. This preliminary run provides an avoided cost curve for EnerNOC. EnerNOC then evaluates the cost effectiveness of DSM programs against the initial avoided cost curve using the appropriate resource cost tests. The therm savings and associated program costs are incorporated into the SENDOUT® model. After incorporation, the avoided costs are re-evaluated. This process continues until the change in avoided cost curve is immaterial.


### Avoided Cost

The SENDOUT® model determined avoided-cost figures represent the unit cost to serve the next unit of demand with a supply-side resource option during a given period. If a conservation measure's total resource cost (for Idaho and Oregon), or utility cost (for Washington), is less than this avoided cost, it will be cost effective to reduce customer demand and Avista can avoid commodity, storage, transportation and other supply resource costs.

SENDOUT® calculates marginal cost data by day, month and year for each demand area. A summary graphical depiction of avoided annual and winter costs for the Washington/Idaho and Oregon areas is in Figure 5.16. The detailed data is in Appendix 5.4. Other than the carbon tax adder embedded in the expected price curve, avoided costs do not include additional environmental externality adders for adverse environmental impacts. Appendix 3.2 discusses this concept more fully and includes specific requirements required in the Oregon service territory.

Chapter 5: Integrated Resource Portfolio

**Figure 5.16: Avoided Cost (Includes Commodity & Transport Cost – 2012 \$/Dth)**

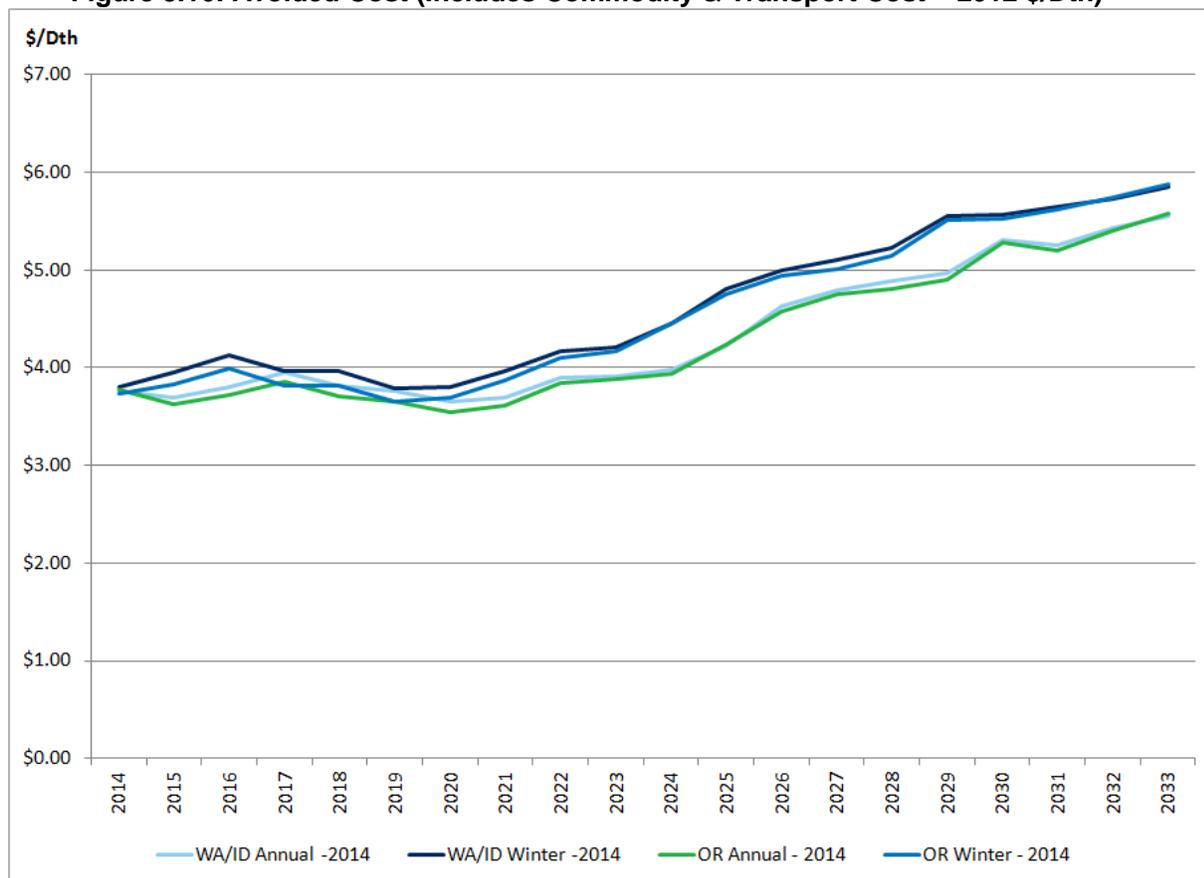

**DSM Potential**

Using the avoided cost thresholds, EnerNOC selected all potential cost effective DSM. Table 5.4 shows potential DSM savings in each region from the selected conservation potential for the Expected Case. The DSM potential includes anticipated annual acquisition and is cumulative.

## Chapter 5: Integrated Resource Portfolio

Table 5.4: Annual and Average Daily Demand Served by DSM

Case	Year	Annual	Daily	Annual	Daily	Annual	Daily
		Klamath DSM (MDth)	Klamath/DSM (MDth/day)	LaGrande DSM (MDth)	LaGrande DSM (MDth)	Medford/ Roseburg DSM (MDth)	Medford/ Roseburg DSM (MDth)
Expected	2014	-	-	-	-	-	-
Expected	2015	0.23	0.00	0.14	0.00	1.24	0.00
Expected	2016	0.40	0.00	0.23	0.00	2.09	0.01
Expected	2017	0.67	0.00	0.39	0.00	3.46	0.01
Expected	2018	1.10	0.00	0.63	0.00	5.59	0.02
Expected	2019	1.64	0.00	0.93	0.00	8.24	0.02
Expected	2020	2.12	0.01	1.21	0.00	10.65	0.03
Expected	2021	2.48	0.01	1.41	0.00	12.49	0.03
Expected	2022	2.84	0.01	1.64	0.00	14.36	0.04
Expected	2023	3.20	0.01	1.85	0.01	16.24	0.04
Expected	2024	3.59	0.01	2.09	0.01	18.25	0.05
Expected	2025	4.12	0.01	2.41	0.01	20.98	0.06
Expected	2026	4.54	0.01	2.67	0.01	23.13	0.06
Expected	2027	4.96	0.01	2.93	0.01	25.32	0.07
Expected	2028	5.39	0.01	3.19	0.01	27.56	0.08
Expected	2029	5.84	0.02	3.46	0.01	29.84	0.08
Expected	2030	6.27	0.02	3.72	0.01	32.06	0.09
Expected	2031	6.69	0.02	3.97	0.01	34.23	0.09
Expected	2032	7.11	0.02	4.22	0.01	36.41	0.10
Expected	2033	7.54	0.02	4.46	0.01	38.58	0.11

Case	Year	Annual	Daily	Annual	Daily	Annual	Daily
		Oregon DSM (MDth)	Oregon DSM (MDth/day)	WA/ID DSM (MDth)	WA/ID DSM (MDth/day)	Total System DSM (MDth)	Total System DSM (MDth/day)
Expected	2014	-	-	-	-	-	0.00
Expected	2015	1.61	0.00	15.15	0.04	16.77	0.05
Expected	2016	2.73	0.01	23.67	0.06	26.39	0.07
Expected	2017	4.51	0.01	37.04	0.10	41.55	0.11
Expected	2018	7.32	0.02	59.02	0.16	66.34	0.18
Expected	2019	10.81	0.03	87.72	0.24	98.54	0.27
Expected	2020	13.98	0.04	113.70	0.31	127.69	0.35
Expected	2021	16.39	0.04	130.99	0.36	147.37	0.40
Expected	2022	18.84	0.05	147.61	0.40	166.45	0.46
Expected	2023	21.30	0.06	163.70	0.45	185.00	0.51
Expected	2024	23.93	0.07	179.76	0.49	203.69	0.56
Expected	2025	27.51	0.08	195.92	0.54	223.43	0.61
Expected	2026	30.34	0.08	210.77	0.58	241.11	0.66
Expected	2027	33.21	0.09	225.16	0.62	258.37	0.71
Expected	2028	36.14	0.10	239.20	0.66	275.34	0.75
Expected	2029	39.14	0.11	252.89	0.69	292.02	0.80
Expected	2030	42.05	0.12	265.48	0.73	307.52	0.84
Expected	2031	44.90	0.12	276.62	0.76	321.51	0.88
Expected	2032	47.74	0.13	287.06	0.79	334.80	0.92
Expected	2033	50.59	0.14	296.88	0.81	347.47	0.95

## Chapter 5: Integrated Resource Portfolio

### **DSM Acquisition Goals**

The avoided cost established in SENDOUT®, the DSM potential selected, and the amount of therm savings is the basis for determining DSM acquisition goals and subsequent program implementation planning. Chapter 3 – Demand-Side Resources has additional details on this process.

### **Supply-Side Resources**

SENDOUT® considers all options entered into the model, determines when and what resources are needed, and which options are cost effective. Selected resources represent the best cost/risk solution, within given constraints, to serve anticipated customer requirements. Since the Expected Case has no resource additions in the planning horizon, Avista will continue to review and refine knowledge of resource options and will act to secure best cost/risk options when necessary or advantageous.

### **Resource Utilization**

Avista's plans to meet firm customers' demand requirements in a cost-effective manner. This goal encompasses a range of activities from meeting peak day requirements in the winter to acting as a responsible steward of resources during periods of lower resource utilization. As the analysis presented in this IRP indicates, Avista has ample resources to meet highly variable demand under multiple scenarios, including peak weather events.

Avista acquired the majority of its upstream pipeline capacity during the deregulation or "unbundling" of the natural gas industry. Pipelines were required to allocate capacity and costs to their existing customers as they transitioned to transportation only service providers. The FERC allowed a rate structure for pipelines to recover costs through a Straight Fixed Variable rate design. This structure is based on a higher reservation charge to cover pipeline costs whether gas is transported or not, and a much smaller variable charge which is incurred only when gas is transported. An additional fuel charge is assessed to account for the compressors required to move the gas to customers. Avista maintains enough firm capacity to meet peak day requirements under the Expected Case in this IRP. This requires pipeline capacity contracts at levels in excess of the average and above minimum load requirements. Given this load profile and the Straight Fixed Variable rate design, Avista incurs ongoing pipeline costs during non-peak periods.

Avista chooses to have an active, hands-on management of resources to mitigate upstream pipeline and commodity costs for customers when the capacity is not utilized

## Chapter 5: Integrated Resource Portfolio

for system load requirements. This management simultaneously deploys multiple long and short-term strategies to meet firm demand requirements in a cost effective manner. The resource strategies addressed are:

- Pipeline contract terms.
- Pipeline capacity.
- Storage.
- Commodity and transport optimization.
- Combination of available resources.

**Pipeline Contract Terms**

Pipeline costs are incurred whether the capacity is utilized or not. Winter demand must be satisfied and peak days must be met. Ideally, capacity could be contracted from pipelines for the time and days it is required. Unfortunately, this is not how pipelines are contracted or built. Long-term agreements at fixed volumes are the usual requirements for building or acquiring firm transport. This assures the pipeline of long-term, reasonable cost recovery.

Avista has negotiated and contracted for several seasonal transportation agreements. These agreements allow volumes to increase during the demand intensive winter months and decrease over the lower demand summer period. This is a preferred contracting strategy because it eliminates costs when demand is low. Avista refers to this as a front line strategy because it attempts to mitigate costs prior to contracting the resource. Not all pipelines offer this option. Avista seeks this type of arrangement when available. Avista currently has some seasonal transportation contracts on TransCanada GTN, TransCanada BC and TransCanada Alberta. These pipelines match up to move natural gas from Alberta (AECO) to Avista's service territories. Avista also contracted for TF2 on NWP. This is a storage specific contract and matches up to some of the Jackson Prairie storage capacity. TF2 is a firm service and allows for contracting a daily amount of transportation for a specified number of days rather than a daily amount on an annual basis as is usually required. For example, one of the TF2 agreements allows Avista to transport 91,200 Dth/day for 31 days. This is a more cost effective strategy for storage transport than contracting for an annual amount. Through NWP's tariff, Avista maintains an option to increase and decrease the number of days this transportation option is available. More days correspond to more costs, so balancing storage, transport and demand is important to ensure an optimal blend of cost and reliability.

## Chapter 5: Integrated Resource Portfolio

**Pipeline Capacity**

After contracting for pipeline capacity, its management and utilization determine the actual costs. The worst-case economic scenario is to do nothing and simply incur the costs associated with this transport contract over a long term to meet current and future peak demand requirements. Avista develops strategies to ensure this does not happen on a regular basis.

**Capacity Release**

Through the pipeline unbundling of transportation, the FERC establishes rules and procedures to ensure a fair market developed to manage pipeline capacity as a commodity. This evolved into the capacity release market and is governed by FERC regulations through individual pipelines. The pipelines implement the FERC's posting requirements to ensure a transparent and fair market is maintained for the capacity. All capacity releases are posted on the pipelines Bulletin Boards and, depending on the terms, may be subject to bidding in an open market. This provides the transparency sought by FERC in establishing the release requirements. Avista utilizes the capacity release market to manage both long-term and short-term transportation capacity.

For capacity under contract that may exceed current demand, Avista seeks other parties that may need it and arranges for capacity releases to transfer rights, obligations and costs. This shifts all or a portion of the costs away from customers to a third party until it is needed to meet customers' demand.

There are many variables in determining the value of transportation. Certain pipeline paths are more valuable and this can vary by year, season, month and day. The term, volume and conditions precedent also contribute to the value recoverable through a capacity release. For example, a release of winter capacity to a third party may allow for full cost recovery; while a release for the same period that allows Avista to recall the capacity for up to 10 days during the winter may not be as valuable to the third party, but of high value to us. Avista may be willing to offer a discount to retain the recall rights during high demand periods. This turns a seasonal-for-annual cost into a peaking-only cost. These are market terms and conditions that are negotiated to determine the value or discount required by both parties.

Avista has several long-term releases, some extending through 2025 providing full recovery of all the pipeline costs. These releases maintain Avista's long-term rights to the transportation capacity without incurring the costs of waiting until demand increases. As the end of these release terms near, Avista surveys the market against the IRP to determine if these contracts should be reclaimed or released, and for what duration. Avista has releases to third parties that terminate in 2016. Results of this IRP show that

## Chapter 5: Integrated Resource Portfolio

this capacity is not needed in 2016 as originally anticipated, and Avista is negotiating new terms and conditions to continue full cost recovery until it is required. Through this process, Avista retains the rights to vintage capacity without incurring the costs or having to participate in future pipeline expansions that will cost more than current capacity.

On a shorter term, excess capacity not fully utilized on a seasonal, monthly or daily basis can also be released. Market conditions often dictate less than full cost recovery for shorter-term requirements. Mitigating some costs for an unutilized, but required resource reduces costs to our customers.

### **Segmentation**

Through a process called segmentation, Avista creates new firm pipeline capacity for the service territory. This doubles some of the capacity volumes at no additional cost to customers. With increased firm capacity, Avista can continue some long-term releases, or even reduce some contract levels, if the release market does not provide adequate recovery.

### **Storage**

As a one-third owner of the Jackson Prairie Storage facility, Avista holds an equal share of capacity (space available to store gas) and delivery (the amount of natural gas that can be withdrawn on a daily basis).

Storage allows lower summer-priced gas to be stored and used in the winter during high demand or peak day events. Similar to transportation, unneeded capacity and delivery can be optimized by selling into a higher priced market. This allows Avista to manage storage capacity and delivery to meet growing peak day requirements when needed.

The injection of gas into storage during the summer utilizes existing pipeline transport and helps increase the utilization factor of pipeline agreements. Avista employs several storage optimization strategies to mitigate costs. Revenue from this activity flows through the annual PGA/Deferral process.

### **Commodity and Transportation Optimization**

Another strategy to mitigate transportation costs is to participate in the daily market to assess if unutilized capacity has value. Avista seeks daily opportunities to purchase gas, transport it on existing unutilized capacity, and sell it into a higher priced market to

## Chapter 5: Integrated Resource Portfolio

capture the cost of the gas purchased and recover some pipeline charges. The recovery is market dependent and may or may not recover all pipeline costs, but mitigates pipeline costs to customers.

### **Combination of Resources**

Unutilized resources like supply, transportation, storage and capacity can combine to create products that capture more value than the individual pieces. Avista has structured long-term arrangements with other utilities that allow available resources utilization and provide products that no individual component can satisfy. These products provide more cost recovery of the fixed charges incurred for the resources.


### **Resource Utilization Summary**

As determined through the IRP modeling of demand and existing resources, new resources under the Expected Case are not required. Avista manages the existing resources to mitigate the costs incurred by customers until the resource is required to meet demand. The recovery of costs is often market based with rules governed by the FERC. Avista is recovering full costs on some resources and partial costs on others. The management of long and short-term resources ensures the goal to meet firm customer demand in a reliable and cost-effective manner.

### **Gate Station Analysis**

Avista identified a risk associated with the aggregated methodology for supply and demand forecasting in previous IRPs. The forecasting methodology is consistent with operational practices which aggregate capacity at individual points for scheduling/nomination purposes. Typically, the amount of natural gas that can flow from a contract demand (i.e., receipt/supply quantity) is fixed and the deliverable amount (i.e., maximum daily delivery obligation or delivery quantity) to gate stations is greater. (See Figure 5.17) However, aggregation could mask deficiencies at individual gate stations.

## Chapter 5: Integrated Resource Portfolio

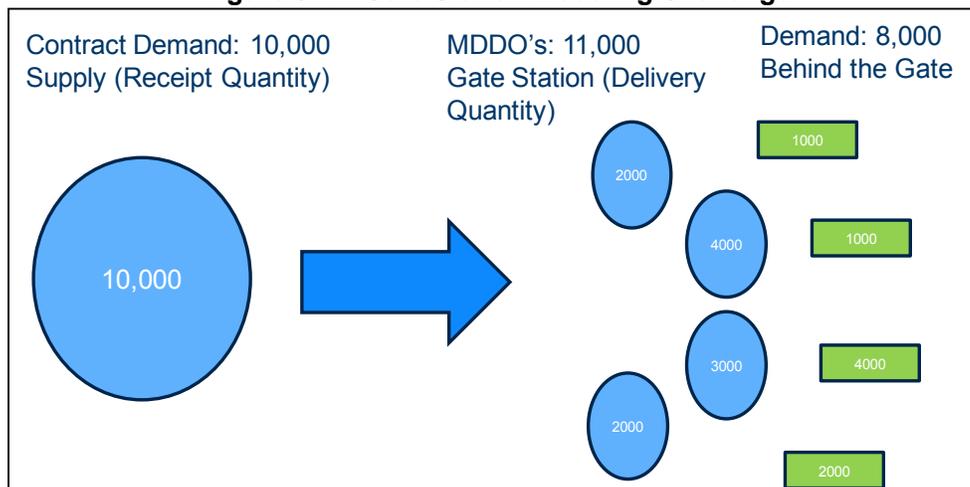**Figure 5.17: Gate Station Modeling Challenge**

To address this concern, a gate-by-gate analysis was developed outside of SENDOUT®. The analysis involved coordination between Gas Supply, Gas Engineering and intrastate pipeline personnel. Utilizing historical gate station flow data and demand forecasting methodologies detailed in the IRP, forecasted peak-day gate station demand was calculated. This demand was compared to contracted and operational capacities at each gate station.

If forecasted demand exceeded contracted and/or operational capacities, further analysis was completed. The additional analysis involved assessing the economic way to address the gate deficiency. This could involve a gate station expansion, re-assigning maximum daily delivery obligations, targeted DSM, or distribution system enhancements.

For example, analysis in the last IRP identified a gate station on NWP's Coeur d'Alene Lateral where forecasted peak day demand exceeded the gate station maximum daily delivery obligation and the physical capacity. Numerous solutions were examined with all parties. The analysis indicated the optimal solution is a pre-existing plan to build a new gate station at Chase Road off GTN's mainline. The project originally was designed to alleviate capacity constraints at GTN's Rathdrum gate; however, the new gate's location could displace natural gas on the NWP Coeur d'Alene Lateral.

Avista is working on the gate station analysis on NWP's system serving Oregon customers. Any deficiencies identified will be communicated to Commission Staff with proposed least cost solutions. After the analysis of the NWP gates is complete, Avista will analyze the GTN system gates.

## Chapter 5: Integrated Resource Portfolio

**Action Items**

With no resource deficiencies in the planning horizon, there are no specific and measurable near-term action items for gate station analysis.

**Conclusion**

The IRP portfolio analysis summarized in this chapter was performed on the Average Case and then on the Expected Case demand scenario. Although the results show no resource deficiencies during the 20-year forecasted term, Avista has chosen to utilize the Expected Case for peak operational planning activities because this case is the most likely outcome given experience, industry knowledge and understanding of future natural gas markets. This case provides reasonable demand growth given current expectations of natural gas prices over the planning horizon. If realized, this case allows Avista protection against resource shortages and does not over commit to additional long-term resources.

Avista recognizes that there are other potential outcomes. The process described in this chapter applies to the alternate demand and supply resource scenarios covered in Chapter 6 – Alternate Scenarios, Portfolios and Stochastic Analysis.

## Chapter 5: Integrated Resource Portfolio

## 6: Alternate Scenarios, Portfolios and Stochastic Analysis

### Overview

Avista applied the IRP analysis in Chapter 5 to several alternate demand and supply resource scenarios to develop a range of alternate portfolios. This deterministic modeling approach considered different underlying assumptions vetted with the TAC members to develop a consensus about the number of cases to model.

Avista also performed stochastic modeling for estimating probability distributions of potential outcomes by allowing for random variation in natural gas prices and weather based on fluctuations in historical data. This statistical analysis, in conjunction with the deterministic analysis, enabled statistical quantification of risk from reliability and cost perspectives related to resource portfolios under varying price and weather environments.

### Alternate Demand Scenarios

As discussed in the Demand Forecasting section, Avista identified alternate scenarios for detailed analysis to capture a range of possible outcomes over the planning horizon. Table 6.1 summarizes these scenarios and Chapter 2 – Demand Forecasts and Appendices 2.6 and 2.7 describes them in more detail. The scenarios consider different demand influencing factors and price elasticity effects for various price influencing factors.


**Table 6.1: Scenarios**

<b>Proposed Scenarios</b> INPUT ASSUMPTIONS	<b>Expected Case</b>	<b>High Growth &amp; Low Prices</b>	<b>Low Growth &amp; High Prices</b>	<b>Cold Day 20yr Weather Std</b>	<b>Average Case</b>
<b>Customer Growth Rate</b>	Reference Case Cust Growth Rates	60% Increase in Cust Growth Rates	40% Decrease in Cust Growth Rates	Reference Case Cust Growth Rates	Reference Case Cust Growth Rates
<b>Use per Customer</b>	3 yr Flat + Price Elast.	3 yr Flat + Price Elast. + CNG/NGV	3 yr Flat + Price Elast.	3 yr Flat + Price Elast.	3 yr Flat + Price Elast.
<b>Demand Side Management</b>	Yes	Yes	Yes	Yes	Yes
<b>Weather Planning Standard</b>	Coldest Day	Coldest Day	Coldest Day	Alternate Planning Standard	Normal
<b>Prices</b>					
Price curve	Expected	Low	High	Expected	Expected
Elasticity	Expected	None	Expected	Expected	Expected
Carbon Legislation (\$/Ton)	\$8.32 - \$14.83	None	\$8.32 - \$14.83	\$8.32 - \$14.83	\$8.32 - \$14.83
<b>RESULTS</b>					
<b>First Gas Year Unserved</b>					
WA/ID	N/A	2029	N/A	N/A	N/A
Medford	N/A	2029	N/A	N/A	N/A
Roseburg	N/A	N/A	N/A	N/A	N/A
Klamath	N/A	N/A	N/A	N/A	N/A
La Grande	N/A	N/A	N/A	N/A	N/A

Chapter 6: Alternate Scenario, Portfolios and Stochastic Analysis


Demand profiles over the planning horizon for each of the scenarios shown in Figures 6.1 and 6.2 reflect the two winter peaks modeled for the different service territories (Dec. 20 and Feb. 15).

**Figure 6.1 Peak Day (Feb 15) – 2014 IRP Demand Scenarios**

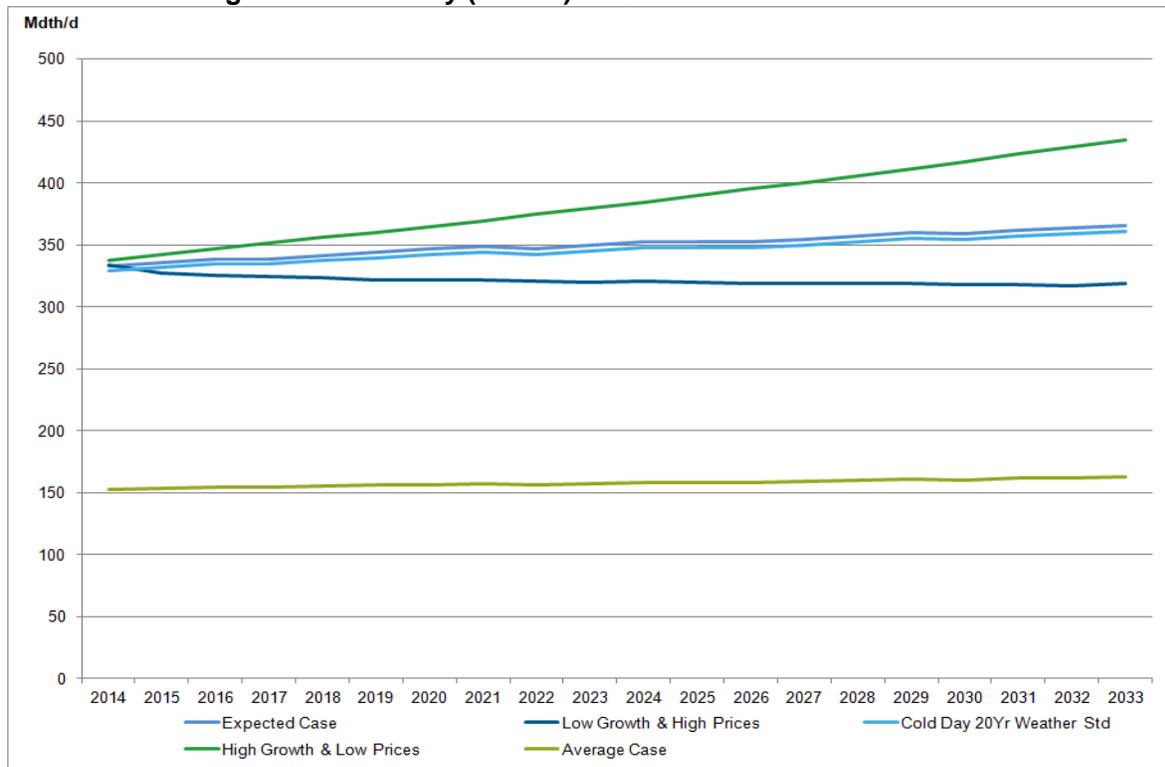

Chapter 6: Alternate Scenario, Portfolios and Stochastic Analysis


Figure 6.2 Peak Day (Dec 20) – 2014 IRP Demand Scenarios

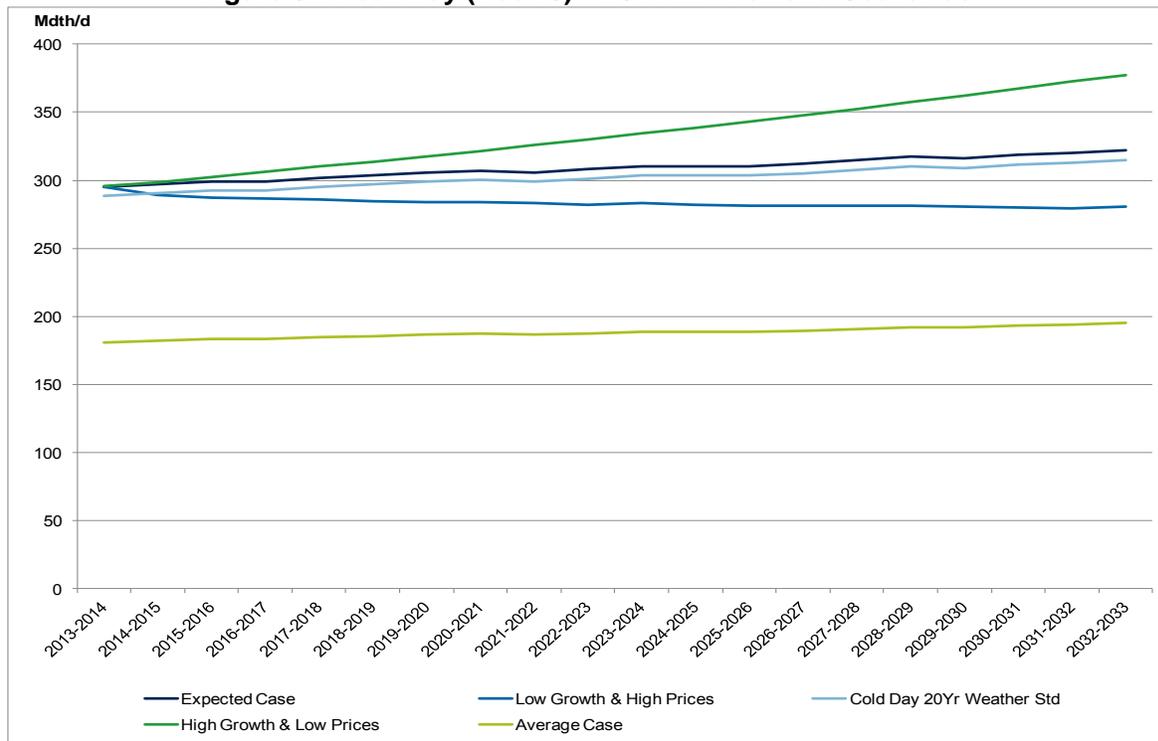

As in the Expected Case, Avista used SENDOUT® to model the same resource integration and optimization process described in this section for each of the five demand scenarios (see Appendix 2.7 for a complete listing of portfolios considered). This identified first year unserved dates for each scenario by service territory (Figure 6.3).

## Chapter 6: Alternate Scenario, Portfolios and Stochastic Analysis

Figure 6.3: First Year Peak Demand Not Met with Existing Resources

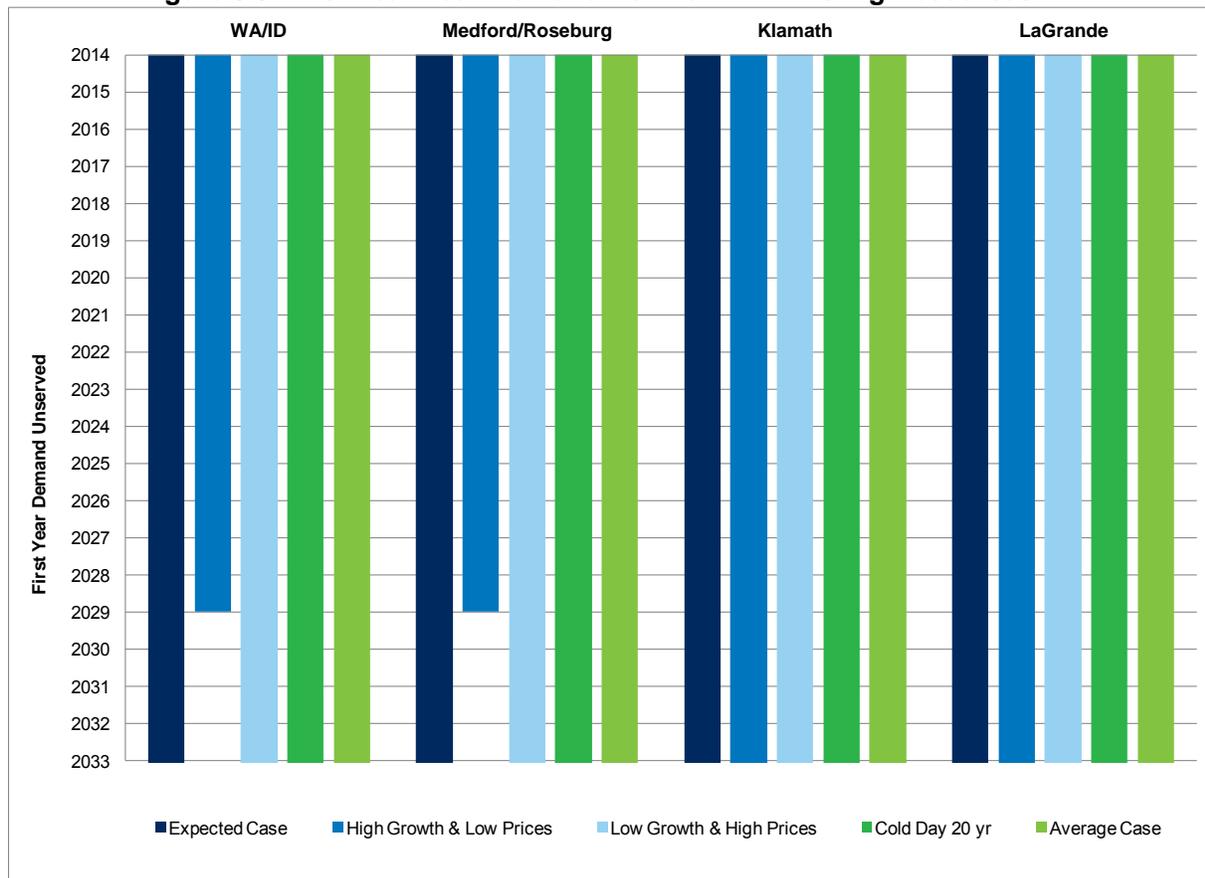

As anticipated, the High Growth, Low Price scenario has the most rapid growth and the earliest first year unserved dates. This scenario includes customer growth rates higher than the Expected Case, incremental demand driven by emerging markets and no adjustment for price elasticity. Even with aggressive assumptions, resource shortages do not occur until late in the planning horizon.

- 2029 in Washington/Idaho.
- 2029 in Medford/Roseburg.

Steeper demand highlights the flat demand risk discussed earlier. The likelihood of this scenario occurring is remote due to a yearly recurrence of coldest day on record weather paired with a much steeper growth of customer population; however, any potential for accelerated unserved dates warrants close monitoring of demand trends and resource lead times as described in the Ongoing Activities section of Chapter 8 –

## Chapter 6: Alternate Scenario, Portfolios and Stochastic Analysis

Action Items. The remaining scenarios do not identify resource deficiencies in the planning horizon.

Due to their importance and connection with the IRP process, additional detailed information on certain selected scenarios is included in the following appendices:

- Demand and Existing Resources graphs by service territory (High Growth Case only) – Appendix 6.1.
- Peak Day Demand, Served and Unserved table (all cases) – Appendix 6.2.
- Avoided cost curve detail and graphs for High Growth and Low Growth cases – Appendix 6.4.

## Alternate Supply Resources

Avista identified supply-side resources that could meet resource deficiencies. Table 6.2 shows available supply-side scenarios considered for this IRP. There are many other options; however, Avista excluded them from SENDOUT® modeling for this IRP given the lack of need in the near term and the speculative nature of many of these resources.

For example, contracted city gate deliveries in the form of a structured purchase transaction could meet peak conditions. However, the market-based price and other terms are difficult to reliably determine until a formal agreement is negotiated. Exchange agreements also have market-based terms and are hard to reliably model when the resource need is later in the planning horizon.

Many of the potential resources are not yet commercially available or well tested technically making them speculative. Resources such as coal-bed methane, LNG imports and absorbed natural gas (ANG) would fall into this category. Avista will continue to monitor all resources and assess their appropriateness for inclusion in future IRPs as described in Chapter 8 – Ongoing Activities.

One resource which will be closely observed is exported LNG. While Avista considered LNG exports, it was primarily as a price-influencing factor. However, if one of the proposed export LNG terminals in Oregon were approved and a pipeline was to be built to supply that facility, it potentially could bring supply through Avista's service territory. However, there is much uncertainty about export LNG because new pipelines are expensive and there are currently existing pipeline options that are more cost effective. Avista will monitor (Chapter 8 – Ongoing Activities) this situation through industry publications and daily operations to consider inclusion of this supply scenario for future IRPs.

## Chapter 6: Alternate Scenario, Portfolios and Stochastic Analysis

**Table 6.2: Supply Scenarios**

Existing Resources
Existing + Expected Available

## Portfolio Evaluation

There is no resource deficiency identified in the planning period and the existing resource portfolio is adequate to meet forecasted demand. The alternate demand scenarios and supply scenarios are matched together to form portfolios. This creates bounds for analyzing the expected case by creating a high and low for customer count, weather and pricing. Each portfolio runs through SENDOUT® where the supply resources and demand-side resources are compared and selected on a least cost basis. Supply resources include AECO, Sumas, Malin, Rockies, Stanfield trading hubs and Jackson Prairie storage. Once resources are determined, a net present value of the revenue requirement (PVRR) is calculated.

Table 6.3 summarizes the PVRR of the portfolios considered. Each portfolio is based on unique assumptions and therefore a simple comparison of PVRR cannot be made.

**Table 6.3: Net Present Value of Revenue Requirement (PVRR) by Portfolio**

Portfolio		Unserviced	
		Demand	PVRR in (000's)
<b>Average Case</b>	Average Demand with Existing Resources (before resource additions)	No	\$ 4,463,055
<b>Expected Case</b>	Expected Demand with Existing Resources (before resource additions)	No	\$ 4,717,654
<b>Additional Demand Scenarios</b>	High Growth, Low Price Demand with Existing Resources	Yes	\$ 4,491,462
	Alternate Weather Standard Demand with Existing Resources	No	\$ 4,557,367
	Low Growth, High Price with Existing Resources	No	\$ 5,455,336

## Stochastic Analysis<sup>1</sup>

The scenario (deterministic) analysis described earlier in this document represents specific what if situations based on predetermined assumptions, including price and weather. These factors are an integral part of scenario analysis. To understand a

<sup>1</sup> SENDOUT® uses Monte Carlo simulation to support stochastic analysis, which is a mathematical technique for evaluating risk and uncertainty. Monte Carlo simulation is a statistical modeling method used to imitate future possibilities that exist with a real-life system.

## Chapter 6: Alternate Scenario, Portfolios and Stochastic Analysis

particular portfolio's response to price and weather, Avista applied stochastic analysis to generate a variety of price and weather events.

Deterministic analysis is a valuable tool for selecting an optimal portfolio. The model selects resources to meet peak weather conditions in each of the 20 years. However, due to the recurrence of design conditions in each of the 20 years, total system costs over the planning horizon can be overstated because of annual recurrence of design conditions and the recurrence of price increases in the forward price curve. As a result, deterministic analysis does not provide a comprehensive look at future events. Utilizing Monte Carlo simulation in conjunction with deterministic analysis provides a more complete picture of portfolio performance under multiple weather and price profiles.

This IRP employs stochastic analysis in two ways. The first tested the weather-planning standard and the second assessed risk related to costs of our Expected case (existing portfolio) under varying price environments. The Monte Carlo simulation in SENDOUT® can vary index price and weather simultaneously. This simulates the effects each have on one another.

### Weather

In order to evaluate weather and its effect on the portfolio, Avista derived 200 simulations (draws) through SENDOUT®'s stochastic capabilities. Unlike deterministic scenarios or sensitivities, the draws have more variability from month-to-month and year-to-year. In the model, random monthly total HDD draw values (subject to Monte Carlo parameters – see Table 6.4) are distributed on a daily basis for a month in history with similar HDD totals. The resulting draws provide a weather pattern with variability in the total HDD values, as well as variability in the shape of the weather pattern. This provides a more robust basis for stress testing the deterministic analysis.

**Table 6.4: Example of Monte Carlo Weather Inputs – Spokane**


	Nov	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct
HDD Mean	895	1,152	1,145	913	781	546	331	143	37	37	191	544
HDD Std Dev	132	141	159	115	85	73	72	52	28	28	77	70
HDD Max	1,361	1,506	1,681	1,204	953	694	471	248	151	97	343	677
HDD Min	699	918	897	716	598	392	192	61	-	1	54	361

Avista models five weather areas: Spokane, Medford, Roseburg, Klamath Falls and La Grande. Avista assessed the frequency that the peak day occurs in each area from the

## Chapter 6: Alternate Scenario, Portfolios and Stochastic Analysis


simulation data. The stochastic analysis shows that in over 200, 20-year simulations, peak day (or more) occurs with enough frequency to maintain the current planning standard for this IRP. This topic remains a subject of continued analysis. For example, the Medford weather pattern over the 200 20-year draws (i.e., 4,000 years). HDDs at or above peak weather (61 HDDs) occur 128 times. This equates to a peak day occurrence once every 31 years (4,000 simulation years divided by 128 occurrences). The Spokane area has the least occurrences of peak day (or more) occurrences and La Grande has the most occurrences. This is primarily due to the frequency in which each region's peak day HDD occurs within the historical data, as well as near peak day HDDs. See Figures 6.4 through 6.8 for the number of peak day occurrences by weather area.

**Figure 6.4: Frequency of Peak Day Occurrences – Spokane**

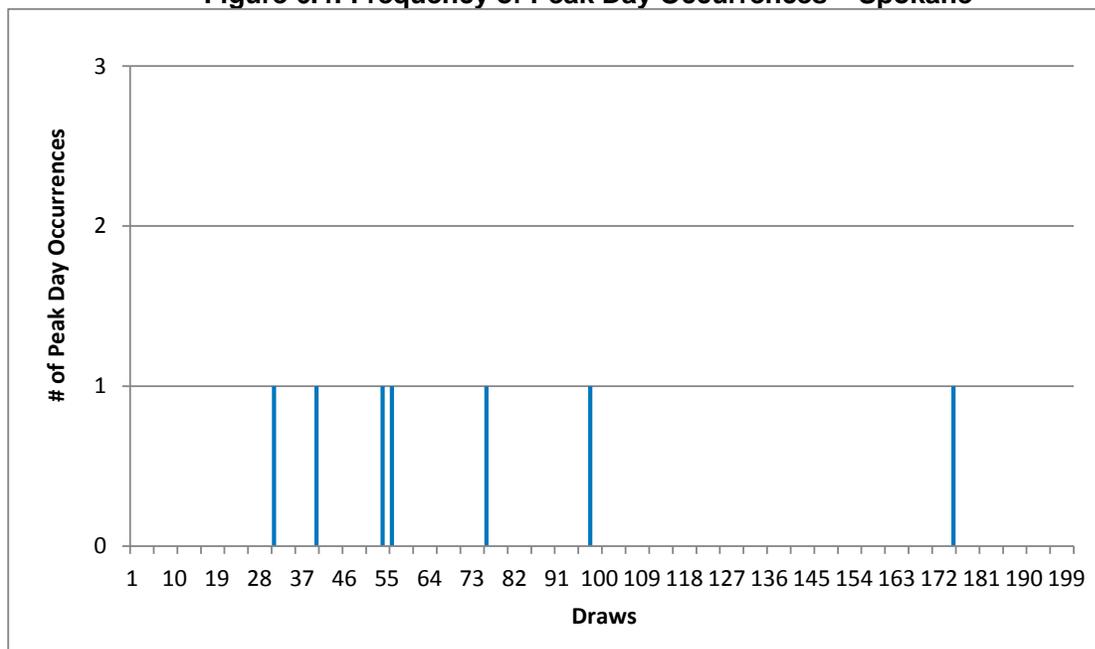


Chapter 6: Alternate Scenario, Portfolios and Stochastic Analysis

**Figure 6.5: Frequency of Peak Day Occurrences – Medford**

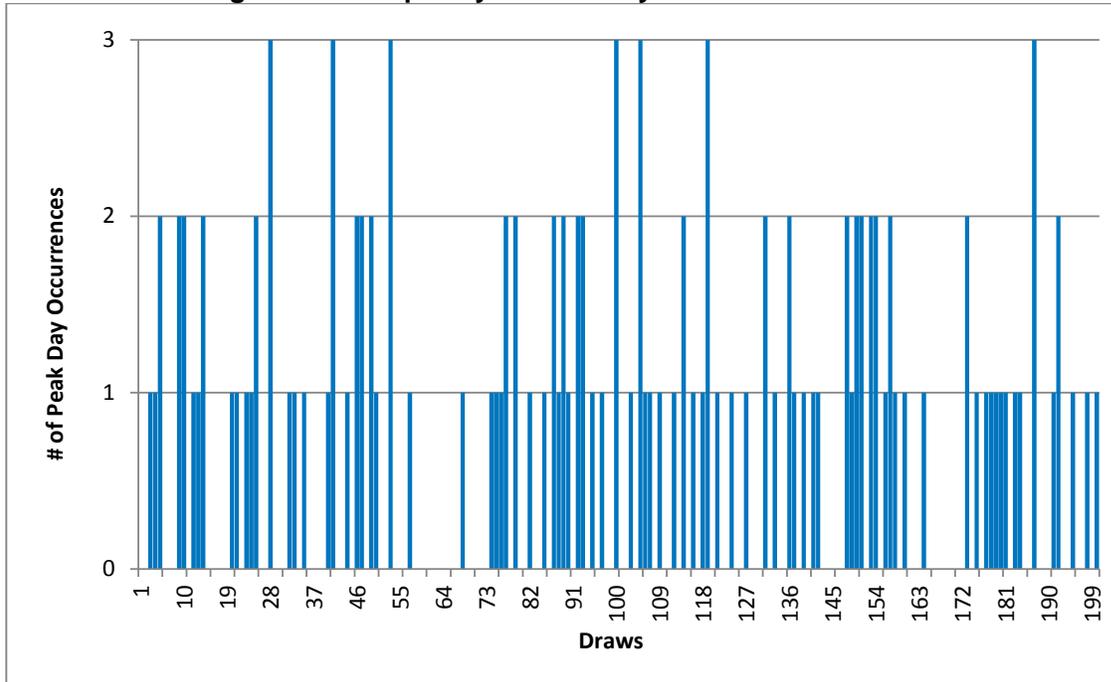


**Figure 6.6: Frequency of Peak Day Occurrences – Roseburg**

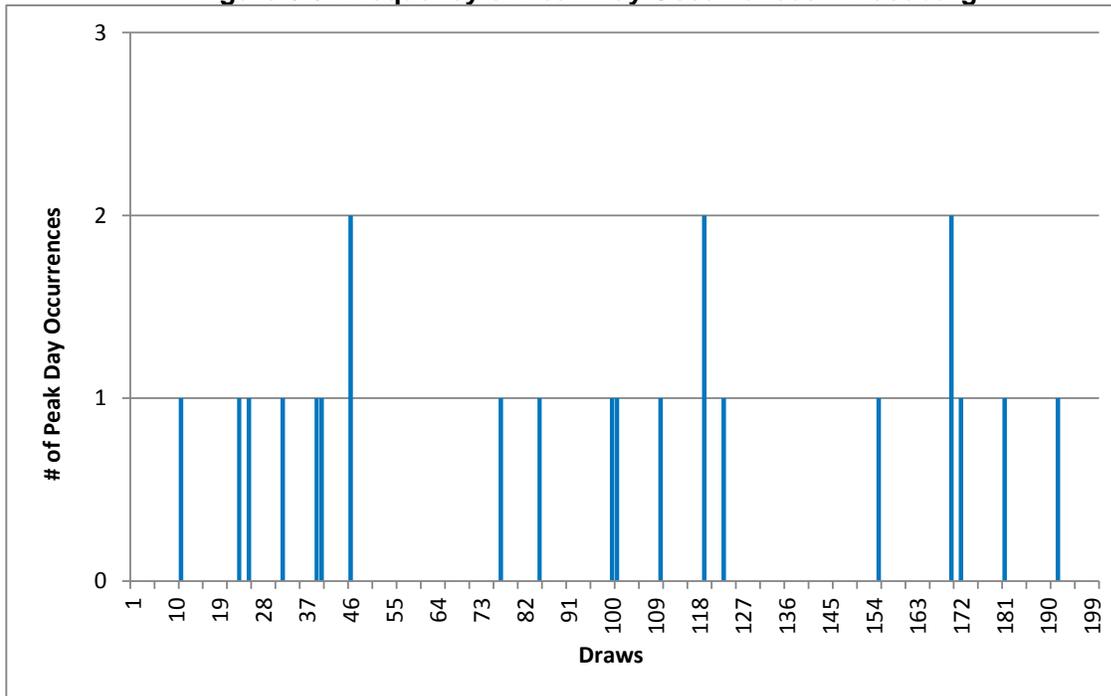


Chapter 6: Alternate Scenario, Portfolios and Stochastic Analysis

**Figure 6.7: Frequency of Peak Day Occurrences – Klamath Falls**

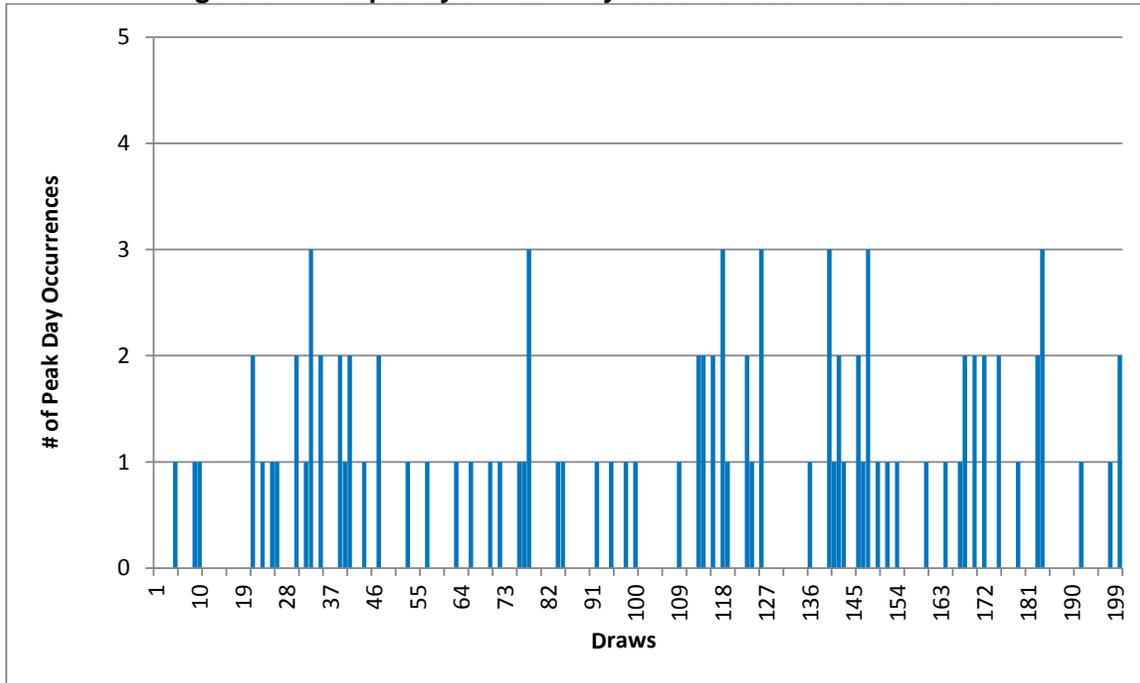

**Figure 6.8: Frequency of Peak Day Occurrences – La Grande**

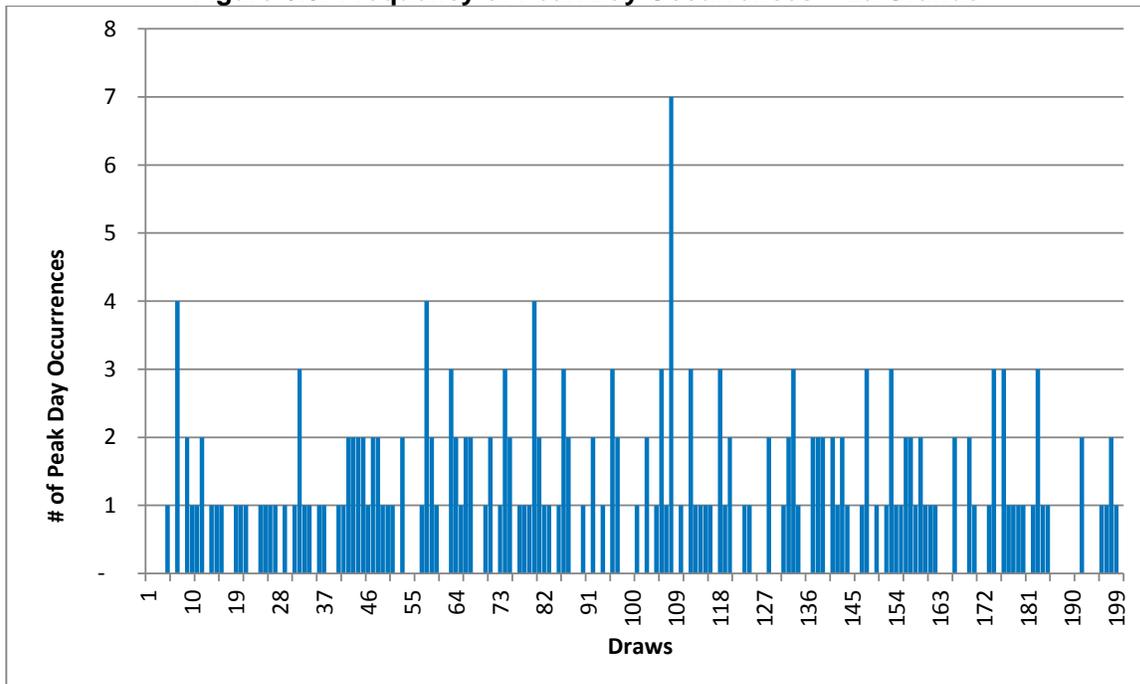


Chapter 6: Alternate Scenario, Portfolios and Stochastic Analysis

**Price**

While weather is an important driver for the IRP, price is also important. As seen in recent years, significant price volatility can affect the portfolio. In deterministic modeling, a single price curve for each scenario is used for analysis. There is risk that the price curve in the scenario will not reflect actual results.

Avista used Monte Carlo simulation to test the portfolio and quantify the risk to customers when prices do not materialize as forecast. Avista performed a simulation of 200 draws, varying prices, to investigate whether the Expected Case total portfolio costs from the deterministic analysis is within the range of occurrences in the stochastic analysis. Figure 6.9 shows a histogram of the total portfolio cost of all 200 draws, plus the Expected Case results. This histogram depicts the frequency and the total cost of the portfolio among all the draws, the mean of the draws, the standard deviation of the total costs, and the total costs from the Expected Case. The figure confirms that Expected Case total portfolio cost is within an acceptable range of total portfolio costs based on 200 unique pricing scenarios.

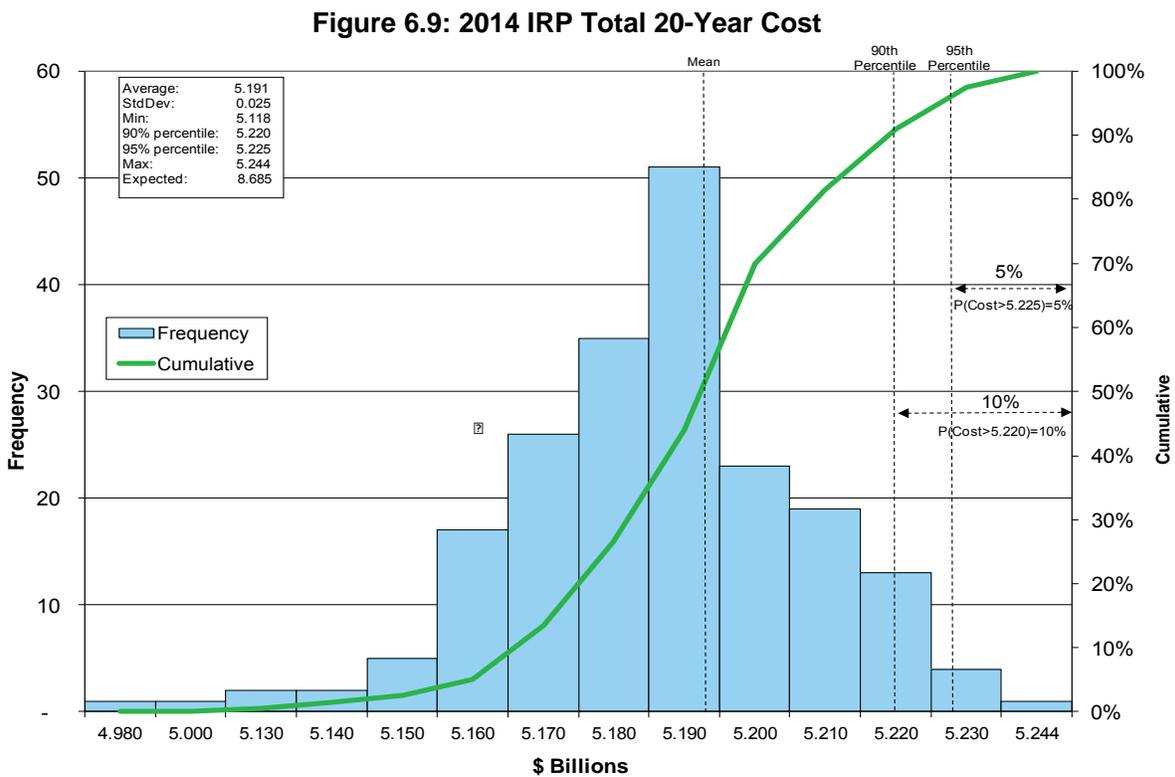

## Chapter 6: Alternate Scenario, Portfolios and Stochastic Analysis

Performing stochastic analysis on weather and price in the demand analysis provided a statistical approach to evaluate and confirm the findings in the scenario analysis with respect to adequacy and reasonableness of the weather-planning standard and the natural gas price forecast. This analytical perspective provides more confidence in the conclusions and stress tests the robustness of the selected portfolio of resources, thereby mitigating analytical risks.

## Regulatory Requirements

IRP regulatory requirements in Idaho, Oregon and Washington call for several key components. The completed plan must demonstrate that the IRP:

- Examines a range of demand forecasts.
- Examines feasible means of meeting demand with both supply-side and demand-side resources.
- Treats supply-side and demand-side resources equally.
- Describes the long-term plan for meeting expected demand growth.
- Describes the plan for resource acquisitions between planning cycles.
- Takes planning uncertainties into consideration.
- Involves the public in the planning process.

Avista addressed the applicable requirements throughout this document. Appendix 1.2 lists the specific requirements and guidelines of each jurisdiction and describes Avista's compliance.

The IRP is also required to consider risks and uncertainties throughout the planning and analysis. Avista's approach in addressing this requirement was to identify factors that could cause significant deviation from the Expected Case planning conclusions. This included dynamic demand analytical methods and sensitivity analysis on demand drivers that impacted demand forecast assumptions. From this, Avista created 17 demand sensitivities and modeled five demand scenario alternatives, which incorporated different customer growth, use-per-customer, weather, and price elasticity assumptions.

Avista analyzed peak day weather planning standard, performing sensitivity on HDDs and modeling an alternate weather-planning standard using the coldest day in 20 years.

## Chapter 6: Alternate Scenario, Portfolios and Stochastic Analysis

Stochastic analysis using Monte Carlo simulations in SENDOUT® supplemented this analysis. Avista also used simulations from SENDOUT® to analyze price uncertainty and the effect on total portfolio cost.

Avista examined risk factors and uncertainties that could affect expectations and assumptions with respect to DSM programs and supply-side scenarios. From this, Avista assessed the expected available supply-side resources and potential DSM savings for evaluation.

The investigation, identification, and assessment of risks and uncertainties in our IRP process should reasonably mitigate surprise outcomes.

## **Conclusion**

The High Growth and Low Growth Case demand analyses provide a range for evaluating demand trajectories relative to the Expected Case. Based on this analysis there appears to be sufficient time to plan for forecasted resource needs. Even under an extreme growth scenario, the first forecasted deficiency does not occur until 2029. Many things could happen between now and when the first resource needs occur, so Avista we will carefully monitor (Chapter 8 – Action Items) demand trends through reconciling and comparing forecast to actual customer counts and continually update and evaluate all demand-side and supply-side alternatives.

Chapter 6: Alternate Scenario, Portfolios and Stochastic Analysis

## 7: Distribution Planning

### Overview

Avista's integrated resource planning encompasses evaluation of safe, economical and reliable full-path delivery of natural gas from basin to the customer meter. Securing adequate natural gas supply and ensuring sufficient pipeline transportation capacity to city gates become secondary issues if distribution system growth behind the city gates becomes severely constrained. Important parts of the planning process include forecasting local demand growth, determining potential distribution system constraints, analyzing possible solutions, and estimating costs for eliminating constraints.

Analyzing resource needs to this point has focused on ensuring adequate capacity to the city gates, especially during a peak event. Distribution planning focuses on determining if there will be adequate pressure during a peak hour. Despite this altered perspective, distribution planning shares many of the same goals, objectives, risks and solutions as resource planning.

Avista's natural gas distribution system consists of approximately 3,000 miles of distribution main pipelines in Idaho, 3,500 miles in Oregon and 5,400 miles in Washington, as well as numerous regulator stations, service distribution lines, monitoring and metering devices, and other equipment. Currently, there are no storage facilities or compression systems within Avista's distribution system. Pressure regulating stations that utilize pipeline pressures from the interstate transportation pipelines before natural gas enters our distribution networks maintains system pressure.

### Distribution System Planning

Avista conducts two primary types of evaluations in its distribution system planning efforts to determine the need for resource additions, including distribution system reinforcements and expansions. Reinforcements are upgrades to existing infrastructure, or new system additions, which increase system capacity, reliability and safety. Expansions are new system additions to accommodate new demand. Collectively, these are distribution enhancements.

Ongoing evaluations of each distribution network in the four primary service territories identify strategies for addressing local distribution requirements resulting from customer growth. Customer growth assessments are made based on factors including IRP demand forecasts, monitoring gate station flows and other system metering, ongoing communication about new service requests, field personnel discussion, and inquiries from major developers.

## Chapter 7: Distribution Planning

Additionally, Avista regularly conducts integrity assessments of its distribution systems. Ongoing system evaluation can also indicate distribution-upgrading requirements for system maintenance needs rather than customer and load growth. In some cases, the timing for system integrity upgrades coincides with growth-related expansion requirements.

These planning efforts provide a long-term planning and strategy outlook and integrate into the capital planning and budgeting process, which incorporates planning for other types of distribution capital expenditures and infrastructure upgrades.

## **Network Design Fundamentals**

Natural gas distribution networks rely on pressure differentials to flow natural gas from one place to another. When pressures are the same on both ends of a pipe, the natural gas does not move. When natural gas is removed from a point on the network, the pressure at that point drops below the pressure upstream in the network and moves from the higher pressure area in the network to the point of removal to equalize pressure throughout the network. If the amount of natural gas removed is not replaced, the pressure differential decreases, flow stalls and the network could run out of pressure. Therefore, it is important to design a distribution network so that intake pressure (from gate stations and/or regulator stations) within the network is high enough to maintain an adequate pressure differential when natural gas leaves the network.

Not all natural gas flows equally throughout a network. Certain points within the network constrain flow and restrict overall network capacity. Network constraints can occur as demand requirements evolve. Anticipating these demand requirements, identifying potential constraints and forming cost-effective solutions with sufficient lead times without overbuilding infrastructure are the key challenges in network design.

## **Computer Modeling**

Developing and maintaining effective network design is aided by computer modeling for network demand studies. Demand studies have evolved with technology in the past decade to become a highly technical and powerful means of analyzing distribution system performance. Using a pipeline fluid flow formula, a specified parameter for each pipe element can be simultaneously solved. Many pipeline equations exist, each tailored to a specific flow behavior. Through years of research, these equations have been refined to the point where modeling solutions produced closely resemble actual system behavior.

Avista conducts network load studies using GL Noble Denton's SynerGEE® software. This computer-based modeling tool allows users to analyze and interpret solutions graphically. Appendix 7.1 describes the computer modeling methodology while

Appendix 7.2 provides an example load study including graphical interface and output examples.

## **Determining Peak Demand**

Avista's distribution network is comprised of high pressure (90-500 psig) and intermediate pressure (5-60 psig) mains. Avista operates its intermediate networks at a relatively low maximum pressure of 60 psig or less for ease of maintenance and operation, public safety, reliable service, and cost considerations. Since the majority of distribution systems operate through relatively small diameter pipes, there is essentially no line-pack capability for managing hourly demand fluctuations.

Core demand typically has a morning peaking period between 6 a.m. and 10 a.m. and an evening peaking period between 5 p.m. and 9 p.m. The peak hour demand for these customers can be as much as 50 percent above the hourly average of daily demand. Because of the importance of responding to hourly peaking in the distribution system, planning capacity requirements for distribution systems uses peak hour demand.<sup>1</sup> Appendix 7.1 shows the methodology Avista uses for determining peak demand.

## **Distribution System Enhancements**

Computer-aided demand studies facilitate modeling numerous demand forecasting scenarios, constraint identification and corresponding optimum combination of pipe modification, and pressure modification solutions to maintain adequate pressures throughout the network.

Distribution system enhancements do not reduce demand nor do they create additional supply. Enhancements can increase the overall capacity of a distribution pipeline system while utilizing existing gate station supply points. The three broad categories of distribution enhancement solutions are pipelines, regulators and compression.

### **Pipelines**

Pipeline solutions consist of looping, upsizing and uprating. Pipeline looping is the most common method of increasing capacity in an existing distribution system. It involves constructing new pipe parallel to an existing pipeline that has, or may become, a constraint point. Constraint points inhibit flow capacities downstream of the constraint creating inadequate pressures during periods of high demand. When the parallel line connects to the system, this alternative path allows natural gas flow to bypass the original constraint and bolsters downstream pressures. Looping can also involve

---

<sup>1</sup> This method differs from the approach that Avista uses for IRP peak demand planning, which focuses on peak day requirements to the city gate.

## Chapter 7: Distribution Planning

connecting previously unconnected mains. The feasibility of looping a pipeline depends upon the location where the pipeline will be constructed. Installing gas pipelines through private easements, residential areas, existing asphalt, and steep or rocky terrain can greatly increase the cost to a point where alternative solutions are more cost effective.

Pipeline upsizing involves replacing existing pipe with a larger size pipe. The increased pipe capacity relative to surface area results in less friction, and therefore a lower pressure drop. This option is usually pursued when there is damaged pipe or pipe integrity issues exist. If the existing pipe is otherwise in satisfactory condition, looping augments existing pipe, which remains in use.

Pipeline uprating increases the maximum allowable operating pressure of an existing pipeline. This enhancement can be a quick and relatively inexpensive method of increasing capacity in the existing distribution system before constructing more costly additional facilities. However, safety considerations and pipe regulations may prohibit feasibility or lengthen the time before completion of this option. Also, increasing line pressure may produce leaks and other pipeline damage creating costly repairs. A thorough review is conducted to ensure integrity before pressure is increased.

**Regulators**

Regulators, or regulator stations, reduce pipeline pressure at various stages in the distribution system. Regulation provides a specified and constant outlet pressure before natural gas continues its downstream travel to a city's distribution system, customer's property or gas appliance. Regulators also ensure that flow requirements are met at a desired pressure regardless of pressure fluctuations upstream of the regulator. Regulators are at city gate stations, district regulators stations, farm taps and customer services.

**Compression**

Compressor stations present a capacity enhancing option for pipelines with significant natural gas flow and the ability to operate at higher pressures. For pipelines experiencing a relatively high and constant flow of natural gas, a large volume compressor installation along the pipeline boosts downstream pressure.

A second option is the installation of smaller compressors located close together or strategically placed along a pipeline. Multiple compressors accommodate a large flow range and use smaller and very reliable compressors. These smaller compressor stations are well suited for areas where gas demand is growing at a relatively slow and steady pace, so that purchasing and installing these less expensive compressors over time allows a pipeline to serve growing customer demand for into the future.

## Chapter 7: Distribution Planning

Compressors can be a cost effective option to resolving system constraints; however, regulatory and environmental approvals to install a station, along with engineering and construction time can be a significant deterrent. Adding compressor stations typically involves considerable capital expenditure. Based on Avista's detailed knowledge of the distribution system, there are no foreseeable plans to add compressors to the distribution network.

## Conservation Resources

Included in the evaluation of distribution system constraints is the consideration of targeted conservation resources to reduce or delay distribution system enhancements. The consumer is still the ultimate decision-maker regarding the purchase of a conservation measure. Because of this, Avista attempts to influence conservation through the DSM measures discussed in Chapter 3 – Demand-Side Resources, but does not depend on estimates of peak day demand reductions from conservation to eliminate near-term distribution system constraints. Over longer-term, targeted conservation programs provide a cumulative benefit that offsets potential constraint areas and may be an effective strategy.

## Planning Results

Table 7.1 summarizes the cost of major distribution system enhancements addressing growth-related system constraints, system integrity issues and the timing of these expenditures. These projects are preliminary estimates of timing and costs of major reinforcement solutions. The scope and needs of these projects generally evolves with new information requiring ongoing reassessment. Actual solutions may differ due to differences in actual growth patterns and/or construction conditions from the initial assessment.

The following discussion provides information about key near-term projects:

**East Medford Reinforcement:** Previous IRP and distribution planning analysis identified a near-term resource deficiency driven by forecasted local growth. Increased natural gas deliveries from the TransCanada Pipeline source at Phoenix Road Gate Station in southeast Medford will remedy this deficiency. To facilitate distribution receipt of the increased natural gas volumes, a new high-pressure (HP) line encircling Medford to the east and tying into an existing high-pressure line in White City will improve delivery capacity and provide reinforcement in the East Medford area.

This has been a multi-phase project spanning several years. As forecasted, needs have changed over time, and with no immediate resource need, completing the final phase of the project has been delayed. Other factors may drive completion of the project including reliability needs, flexibility of natural gas supply management and optimizing

## Chapter 7: Distribution Planning

synergies of other construction projects to reduce project cost. Avista will continue to evaluate forecasts and assess the most appropriate timing for completion of this project.

**U.S. Highway 2 North Spokane Reinforcement:** This project will reinforce the area north of Spokane along U.S. Highway 2. This mixed-use area experiences low pressure during winter at unpredictable times given demand profiles of the diverse customer base. Completion of this reinforcement will improve pressures in the U.S. 2 North Kaiser area. Approximately 8,000 feet of HP steel gas main will be installed in a newly established easement along U.S. Highway 2.

**Chase Road Gate Station, Post Falls, Idaho:** This gate station will allow Avista to split the large load at the Rathdrum Gate Station. Approximately 18,000 feet of new HP line will connect the Chase Road Gate Station to the existing HP line. This gate station will give Avista the opportunity to feed the growing Post Falls and Coeur d'Alene areas from the north.

**Table 7.1 Distribution Planning Capital Projects**

		2015	2016	2017	2018
<b>Projects</b>	<b>*East Medford Reinforcement</b>	\$0	\$0	\$0	\$5,000,000
	<b>Goldendale HP</b>	\$3,500,000	\$0	\$0	\$0
	<b>NSC Greene ST HP</b>	\$0	\$0	\$0	\$1,500,000
	<b>Rathdrum Prairie HP Gas Reinforcement</b>	\$100,000	\$4,900,000	\$5,000,000	\$0
	<b>*Reinforcement, Hwy 2 Kaiser</b>	\$1,300,000	\$0	\$0	\$0
	<b>Spokane St Bridge Gas</b>	\$1,000,000	\$0	\$0	\$0

\*Details of project described in IRP

Table 7.2 shows city gate stations identified as over utilized or under capacity. Estimated cost, year and the plan to remediate the capacity concern are shown.

## Chapter 7: Distribution Planning

**Table 7.2 City Gate Station Upgrades**

Location	Gate Stn	Project to Remediate	Cost	Year
Athol, ID	Athol #219	TBD	-	2019+
Genesee, ID	Genesee #320	TBD	-	2019+
Rathdrum, ID	*Chase Rd	Chase Rd Gate Stn & Hayden Ave HP Main	\$5.4M	2014
CDA (East), ID	CDA East #221	Rathdrum Prairie HP Gas Reinforcement	\$10M	2016-17
Post Falls, ID	McGuire #213			
CDA (West), ID	Post Falls & CDA West			
Colton, WA	Colton #316	TBD	-	2019+
Sutherlin, OR	Sutherlin #2626	TBD	-	2019+
La Grande, OR	La Grande #815 & Union #817	Union HP Connector	\$3M	2019+

\*Details of project described in IRP

## CONCLUSION

Avista's goal is to maintain its distribution systems reliably and cost effectively to deliver natural gas to every customer. This goal relies on computer modeling to increase the capacity and reliability of the distribution system by identifying specific areas that may require changes.

The ability to meet the goal of reliable and cost effective gas delivery is enhanced through localized distribution planning, which enables coordinated targeting of distribution projects responsive to customer growth patterns.

Chapter 7: Distribution Planning

## 8: Action Plan

### 2013-2014 Action Plan Review

**Action Item**

Avista will monitor actual demand for indications of deviations away from the Expected Case.

**Results**

Forecast to actual analysis reveals that the modeling techniques are producing forecasts that track actual demand. Recent natural gas demand does not show significant deviation away from expected results.

**Action Item**

Continued enhancement of the gate station analysis will assess if the aggregated IRP analysis masks any individual gate station deficiencies. Any deficiencies identified and potential solutions will be discussed with Commission Staff. Avista will continue to coordinate analytic efforts between Gas Supply, Gas Engineering and the intrastate pipelines to perform gate station analysis and seek least cost solutions for any identified deficiencies.

**Results**

Avista is completing the gate analysis in Oregon on the NWP system. Any deficiencies will be communicated along with solutions for rectifying the deficiencies to Commission Staff. The gates along the GTN system will be reviewed next.

**Action Item**

Avista filed in Idaho, Oregon and Washington to suspend natural gas DSM programs due to the low avoided costs in the 2012 IRP. Over the next two to three years, Avista will review natural gas prices as a signpost for the cost-effectiveness of DSM programs. If natural gas prices increase enough, Avista will seek to reinstate a full complement of natural gas DSM programs.

**Results**

Idaho approved the filing, and natural gas DSM programs were suspended. In Oregon, DSM programs will continue for a two-year period. During that time, Avista will evaluate program costs and develop a separate program for low-income participants. In Washington, DSM programs were also allowed to continue for a limited period and the test for evaluating cost effectiveness was changed from the total resource cost to the utility cost test.

## Chapter 8: Action Plan

**Action Item**

Pursue the possibility of a regional elasticity study through the NGA or the AGA.

**Results**

Price elasticity theory predicts that energy consumers will reduce consumption as prices rise. The amount of a response is debatable. Avista has reviewed historic research on price elasticity. The analysis shows a wide range of results from statistically significant to statistically insignificant and even positive in some cases.

Avista contacted the NGA and they are still willing to help facilitate a process if a regional price elasticity study moves forward. At this time, Avista is assessing the costs and benefits of such an undertaking. A regional natural gas price elasticity study will commence if enough interest develops in the project.

**2015-2016 Action Plan**

The recent recession significantly affected the expected long-term customer growth in Avista's service territory. This natural gas demand reduction has created no resource needs in the Expected Case within the 20-year planning horizon. Scenario analysis shows that even in the most robust growth case, Avista will not have a resource deficiency until very late in the 20-year forecast.

With no immediate resource needs, Avista can evaluate current resources and potential future resources. Avista will continue to optimize underutilized resource to recover value for customers and reduce their costs until resources are required to meet changing demand needs.

Avista remains committed to offering cost-effective conservation measures as a way for customers to reduce their energy bills and promote a cleaner environment. Like the 2012 IRP, the low price of natural gas has reduced the amount of cost-effective DSM measures. Based on the latest CPA, incorporating the lower avoided costs, Avista estimates 22,800 Dth of first year savings in Idaho, 16,100 Dth of savings in Oregon and 128,700 Dth of savings in Washington. .

Avista will comply with Commission findings to try to increase the cost effectiveness of DSM measures by reducing administration and audit costs, analyzing non-natural gas benefits and increasing measure lives. Avista will monitor natural gas prices as signpost for increasing avoided costs. If avoided costs increase, Avista will evaluate DSM programs for cost effectiveness and submit to resume natural gas DSM options.

Complete the gate station analysis to assess resource deficiencies masked by aggregated IRP analysis. Any identified deficiencies and potential solutions will be discussed with Commission Staff. Avista will continue to coordinate analytic efforts between Gas Supply, Gas Engineering and the intrastate pipelines to perform gate station analysis and develop least cost solutions should deficiencies exist.

## Chapter 8: Action Plan

**Ongoing Activities**

- Monitor actual demand for indications of growth exceeding the forecast to respond aggressively to address accelerated resource deficiencies arising from flat demand risk. This will include providing Commission Staff with IRP demand forecast to actual variance analysis on customer growth and use-per-customer. Avista will provide this information in updates to Commission Staff at least biannually.
- Continue to monitor supply resource trends, including the availability and price of natural gas to the regions, LNG exports, Canadian natural gas imports and interprovincial consumption trends, regional plans for natural gas-fired generation, and its affect on pipeline availability, as well as regional pipeline and storage infrastructure plans.
- Monitor new resource lead-time requirements relative to resource need to preserve resource option flexibility.
- Regularly meet with Commission Staff members to provide information on market activities and significant changes in assumptions and/or status of Avista's activities related to the IRP and natural gas procurement practices.

## Chapter 8: Action Plan

## 9: Glossary of Terms and Acronyms

### **Achievable Potential**

Represents a realistic assessment of expected energy savings, recognizing and accounting for economic and other constraints that preclude full installation of every identified conservation measure.

### **AGA**

American Gas Association

### **Annual Measures**

Conservation measures that achieve generally uniform year-round energy savings independent of weather temperature changes. Annual measures are also often called base load measures.

### **Average Case**

Represents Avista's demand forecast for normal planning purposes. This case uses a 20 year rolling average NOAA weather for the five major areas (Spokane, WA., Medford, OR. Klamath Falls, OR, Roseburg, OR. La Grande, OR.).

### **Avista**

The regulated Operating Division of Avista Corp.; separated into north (Washington and Idaho) and south (Oregon) regions. Avista Utilities generates, transmits and distributes electricity, in addition to the transmission and distribution of natural gas.

### **Backhaul**

A transaction where gas is transported the opposite direction of normal flow on a unidirectional pipeline.

### **Base Load**

As applied to natural gas, a given demand for natural gas that remains fairly constant over a period of time, usually not temperature sensitive.

### **Base Load Measures**

Conservation measures that achieve generally uniform year-round energy savings independent of weather temperature changes. Base load measures are also often called annual measures.

## Chapter 9: Glossary of Terms and Acronyms

**Basis Differential**

The difference in price between any two natural gas pricing points or time periods. One of the more common references to basis differential is the pricing difference between Henry Hub and any other pricing point in the continent.

**British Thermal Unit (BTU)**

The amount of heat required to raise the temperature of one pound of pure water one degree Fahrenheit under stated conditions of pressure and temperature; a therm (see below) of natural gas has an energy value of 100,000 BTUs and is approximately equivalent to 100 cubic feet of natural gas.

**Capacity**

The sum amount of natural gas transportation contracts or storage available in Avista's current portfolio.

**CD**

Contract Demand

**C&I**

Commercial and Industrial

**City Gate (also known as gate station or pipeline delivery point)**

The point at which natural gas deliveries transfer from the interstate pipelines to Avista's distribution system.

**CNG**

Compressed Natural Gas

**Compression**

Increasing the pressure of natural gas in a pipeline by means of a mechanically-driven compressor station to increase flow capacity.

**Conservation Measures**

Installations of appliances, products or facility upgrades that result in energy savings.

**Contract Demand (CD)**

The maximum daily, monthly, seasonal or annual quantities of natural gas, which the supplier agrees to furnish, or the pipeline agrees to transport, and for which the buyer or shipper agrees to pay a demand charge.

**Core Load**

Firm delivery requirements of Avista, which are comprised of residential, commercial and firm industrial customers.

## Chapter 9: Glossary of Terms and Acronyms

**Cost Effectiveness**

The determination of whether the present value of the therm savings for any given conservation measure is greater than the cost to achieve the savings.

**CPA**

Conservation Potential Assessment

**CPI**

Consumer Price Index, as calculated and published by the U.S. Department of Labor, Bureau of Labor Statistics

**Cubic Foot (cf)**

A measure of natural gas required to fill a volume of one cubic foot under stated conditions of temperature, pressure and water vapor; one cubic foot of natural gas has the energy value of approximately 1,000 BTUs and 100 cubic feet of natural gas equates to one therm (see below).

**Curtailement**

A restriction or interruption of natural gas supplies or deliveries; may be caused by production shortages, pipeline capacity or operational constraints or a combination of operational factors.

**Dekatherm (Dth)**

Unit of measurement for natural gas; a dekatherm is 10 therms, which is one thousand cubic feet (volume) or one million BTUs (energy).

**Demand-Side Management (DSM)**

The activity pursued by an energy utility to influence its customers to reduce their energy consumption or change their patterns of energy use away from peak consumption periods.

**Demand-Side Resources**

Energy resources obtained through assisting customers to reduce their "demand" or use of natural gas. Also represents the aggregate energy savings attained from installation of conservation measures.

**DSM**

Demand-Side Management

**Dth**

Unit of measurement for natural gas; a dekatherm is 10 therms, which is one thousand cubic feet (volume) or one million BTUs (energy).

## Chapter 9: Glossary of Terms and Acronyms

**EIA**

Energy Information Administration

**Expected Case**

The most likely scenario for peak day planning purposes. This case uses a 20 year rolling average NOAA weather for the five major areas (Spokane, WA., Medford, OR. Klamath Falls, OR, Roseburg, OR. La Grande, OR.). Combined with this 20 year rolling average weather is the coldest day on record.

**External Energy Efficiency Board**

Also known as the "Triple-E" board, this non-binding external oversight group was established in 1999 to provide Avista with input on DSM issues.

**Externalities**

Costs and benefits borne by a third party not reflected in the price paid for goods or services.

**Federal Energy Regulatory Commission (FERC)**

The government agency charged with the regulation and oversight of interstate natural gas pipelines, wholesale electric rates and hydroelectric licensing; the FERC regulates the interstate pipelines with which Avista does business and determines rates charged in interstate transactions.

**FERC**

Federal Energy Regulatory Commission

**Firm Service**

Service offered to customers under schedules or contracts that anticipate no interruptions; the highest quality of service offered to customers.

**Force Majeure**

An unexpected event or occurrence not within the control of the parties to a contract, which alters the application of the terms of a contract; sometimes referred to as "an act of God;" examples include severe weather, war, strikes, pipeline failure and other similar events.

**Forward Haul**

A transaction where gas is transported the normal direction of normal flow on a unidirectional pipeline.

**Forward Market**

An over-the-counter marketplace that sets the price of a financial instrument or physical asset for future delivery.

## Chapter 9: Glossary of Terms and Acronyms

**Forward Price**

The future price for a quantity of natural gas to be delivered at a specified time.

**Gas Transmission Northwest (GTN)**

A subsidiary of TransCanada Pipeline which owns and operates a natural gas pipeline that runs from the Canada/USA border to the Oregon/California border. One of the six natural gas pipelines Avista transacts with directly.

**Geographic Information System (GIS)**

A system of computer software, hardware and spatially referenced data that allows information to be modeled and analyzed geographically.

**GHG**

Greenhouse Gas

**Global Insight, Inc.**

A national economic forecasting company.

**GTN**

Gas Transmission Northwest

**Heating Degree Day (HDD)**

A measure of the coldness of the weather experienced, based on the extent to which the daily average temperature falls below 65 degrees Fahrenheit; a daily average temperature represents the sum of the high and low readings divided by two.

**Henry Hub**

The physical location in Louisiana that is widely recognized as the most important natural gas pricing point in the U.S., as well as the trading hub for the New York Mercantile Exchange (NYMEX).

**HP**

High Pressure

**Injection**

The process of putting natural gas into a storage facility; also called liquefaction when the storage facility is a liquefied natural gas plant.

**Integrity Management Plan**

A federally regulated program that requires companies to evaluate the integrity of their natural gas pipelines based on population density. The program requires companies to identify high consequence areas, assess the risk of a pipeline failure in the identified areas and provide appropriate mitigation measures when necessary.

## Chapter 9: Glossary of Terms and Acronyms

**Interruptible Service**

A service of lower priority than firm service offered to customers under schedules or contracts that anticipate and permit interruptions on short notice. The interruption happens when the demand of all firm customers exceeds the capability of the system to continue deliveries to all of those customers.

**IPUC**

Idaho Public Utilities Commission

**IRP**

Integrated Resource Plan; the document that explains Avista's plans and preparations to maintain sufficient resources to meet customers' natural gas needs at a reasonable price.

**Jackson Prairie**

An underground natural gas storage project jointly owned by Avista Corp., Puget Sound Energy and NWP. The project is a naturally occurring aquifer near Chehalis, Wash., which is located about 1,800 feet beneath the surface and capped with a thick layer of dense shale.

**Liquefaction**

Any process converting natural gas from the gaseous to the liquid state. For natural gas, this process is accomplished through lowering the temperature of the natural gas (see LNG).

**Liquefied Natural Gas (LNG)**

Natural gas liquefied by reducing its temperature to minus 260 degrees Fahrenheit at atmospheric pressure.

**Linear Programming**

A mathematical method of solving problems by means of linear functions where the multiple variables involved are subject to constraints; this method is utilized in the SENDOUT<sup>®</sup> Gas Model.

**Load Duration Curve**

An array of daily send outs observed, sorted from highest send out day to lowest to demonstrate peak requirements and the number of days it persists.

**Load Factor**

The average load of a customer, a group of customers or an entire system, divided by the maximum load; can be calculated over any time period.

## Chapter 9: Glossary of Terms and Acronyms

**Local Distribution Company (LDC)**

A utility that purchases natural gas for resale to end-use customers and/or delivers customer's natural gas or electricity to end users' facilities.

**Looping**

The construction of a second pipeline parallel to an existing pipeline over the whole or any part of its length, thus increasing the capacity of that section of the system.

**MCF**

A unit of volume equal to a thousand cubic feet.

**MDDO**

Maximum Daily Delivery Obligation

**MDQ**

Maximum Daily Quantity

**MMbtu**

A unit of heat equal to one million British thermal units (BTUs) or 10 therms. Used interchangeably with Dth.

**National Energy Board**

The Canadian equivalent to the Federal Energy Regulatory Commission (FERC).

**National Oceanic Atmospheric Administration (NOAA)**

Publishes the latest weather data; the 30-year weather study included in this IRP is based on this information.

**Natural Gas**

A naturally occurring mixture of hydrocarbon and non-hydrocarbon gases found in porous geologic formations beneath the earth's surface, often in association with petroleum; the principal constituent is methane and it is lighter than air.

**New York Mercantile Exchange (NYMEX)**

An organization that facilitates the trading of several commodities, including natural gas.

**NGV**

Natural Gas Vehicles

**NOAA**

National Oceanic and Atmospheric Administration

## Chapter 9: Glossary of Terms and Acronyms

**Nominal**

Discounting method that includes inflation.

**Nomination**

The scheduling of daily natural gas requirements.

**Non-Coincidental Peak Demand**

The demand forecast for a 24-hour period for multiple regions that includes at least one peak day and one non-peak day.

**Non-Firm Open Market Supplies**

Natural gas purchased via short-term purchase arrangements. May supplement firm contracts during times of high demand or to displace other volumes when cost-effective. Also referred to as spot market supplies.

**Northwest Pipeline Corporation (NWP)**

A principal interstate pipeline serving the Pacific Northwest and one of six natural gas pipelines Avista transacts with directly. NWP is a subsidiary of The Williams Companies, headquartered in Salt Lake City, Utah.

**NOVA Gas Transmission (NOVA)**

See TransCanada Alberta System

**Northwest Power and Conservation Council (NPCC)**

A regional energy planning and analysis organization headquartered in Portland, Ore.

**NPCC**

Northwest Power and Conservation Council

**NWP**

Williams-Northwest Pipeline

**NYMEX**

New York Mercantile Exchange

**OPUC**

Oregon Public Utility Commission

**Peak Day**

The greatest total natural gas demand forecasted in a 24-hour period used as a basis for planning peak capacity requirements.

## Chapter 9: Glossary of Terms and Acronyms

**Peak Day Curtailment**

Curtailment imposed on a day-to-day basis during periods of extremely cold weather when demands for natural gas exceed the maximum daily delivery capability of a pipeline system.

**Peaking Capacity**

The capability of facilities or equipment normally used to supply incremental natural gas under extreme demand conditions (i.e. peaks); generally available for a limited number of days at this maximum rate.

**Peaking Factor**

A ratio of the peak hourly flow and the total daily flow at the city-gate stations used to convert daily loads to hourly loads.

**Prescriptive Measures**

Avista's DSM tariffs require the application of a formula to determine customer incentives for natural gas-efficiency projects. For commonly encountered efficiency applications that are relatively uniform in their characteristics, the utility has the option to define a standardized incentive based upon the typical application of the efficiency measure. This standardized incentive takes the place of a customized calculation for each individual customer. This streamlining reduces both the utility and customer administrative costs of program participation and enhances the marketability of the program.

**Psig**

Pounds per square inch gauge – a measure of the pressure at which natural gas is delivered.

**PVRR**

Present Value Revenue Requirement

**Rate Base**

The investment value established by a regulatory authority upon which a utility is permitted to earn a specified rate of return; generally this represents the amount of property used and useful in service to the public.

**Real**

Discounting method that excludes inflation.

**Resource Stack**

Sources of natural gas infrastructure or supply available to serve Avista's customers.

## Chapter 9: Glossary of Terms and Acronyms

**Seasonal Capacity**

Natural gas transportation capacity designed to service in the winter months.

**Sendout**

The amount of natural gas consumed on any given day.

**SENDOUT®**

Natural gas planning system from Ventyx; a linear programming model used to solve gas supply and transportation optimization questions.

**Service Area**

Territory in which a utility system is required or has the right to provide natural gas service to ultimate customers.

**Spot Market Gas**

Natural gas purchased under short-term agreements as available on the open market; prices are set by market pressure of supply and demand.

**Storage**

The utilization of facilities for storing natural gas which has been transferred from its original location for the purposes of serving peak loads, load balancing and the optimization of basis differentials; the facilities are usually natural geological reservoirs such as depleted oil or natural gas fields or water-bearing sands sealed on the top by an impermeable cap rock; the facilities may be man-made or natural caverns. LNG storage facilities generally utilize above ground insulated tanks.

**TAC**

Technical Advisory Committee

**Tariff**

A published volume of regulated rate schedules, plus general terms and conditions under which a product or service will be supplied.

**TF-1**

NWP's rate schedule under which Avista moves natural gas supplies on a firm basis.

**TF-2**

NWP's rate schedule under which Avista moves natural gas supplies out of storage projects on a firm basis.

**Technical Advisory Committee (TAC)**

Industry, customer and regulatory representatives that advise Avista during the IRP planning process.

## Chapter 9: Glossary of Terms and Acronyms

**Technical Potential**

An estimate of all energy savings that could theoretically be accomplished if every customer who could potentially install a conservation measure did so without consideration of market barriers such as cost and customer awareness.

**Therm**

A unit of heating value used with natural gas that is equivalent to 100,000 British thermal units (BTU); also approximately equivalent to 100 cubic feet of natural gas.

**Town Code**

A town code is an unincorporated area within a county and a municipality within a county served by Avista natural gas retail services.

**TransCanada Alberta System**

Previously known as NOVA Gas Transmission; a natural gas gathering and transmission corporation in Alberta that delivers natural gas into the TransCanada BC System pipeline at the Alberta/British Columbia border; one of six natural gas pipelines Avista transacts with directly.

**TransCanada BC System**

Previously known as Alberta Natural Gas; a natural gas transmission corporation of British Columbia that delivers natural gas between the TransCanada-Alberta System and GTN pipelines that runs from the Alberta/British Columbia border to the United States border; one of six natural gas pipelines Avista transacts with directly.

**Transportation Gas**

Natural gas purchased either directly from the producer or through a broker and is used for either system supply or for specific end-use customers, depending on the transportation arrangements; NWP and GTN transportation may be firm or interruptible.

**TRC**

Total Resource Cost

**Triple E**

External Energy Efficiency Board

**Tuscarora Gas Transmission Company**

Tuscarora is a subsidiary of Sierra Pacific Resources and TransCanada; this natural gas pipeline runs from the Oregon/California border to Reno, Nev.; one of the six natural gas pipelines Avista transacts with directly;

**Vaporization**

Any process in which natural gas is converted from the liquid to the gaseous state.

## Chapter 9: Glossary of Terms and Acronyms

**WCSB**

Western Canadian Sedimentary Basin

**Weighted Average Cost of Gas (WACOG)**

The price paid for a volume of natural gas and associated transportation based on the prices of individual volumes of natural gas that make up the total quantity supplied over an established time period.

**Weather Normalization**

The estimation of the average annual temperature in a typical or "normal" year based on examination of historical weather data; the normal year temperature is used to forecast utility sales revenue under a procedure called sales normalization.

**Weather Sensitive Measures**

Conservation measures whose energy savings are influenced by weather temperature changes. Weather sensitive measures are also often referred to as winter measures.

**Winter Measures**

Conservation measures whose energy savings are influenced by weather temperature changes. Winter measures are also often referred to as weather sensitive measures.

**Withdrawal**

The process of removing natural gas from a storage facility, making it available for delivery into the connected pipelines; vaporization is necessary to make withdrawals from an LNG plant.

**WUTC**

Washington Utilities and Transportation Commission