BEFORE WASHINGTON UTILITIES AND TRANSPORTATION COMMISSION

In the Matter of the Review of: Unbundled Loop and Switching Rates; the Deaveraged Zone Rate Structure; and Unbundled Network Elements, Transport, And Termination

Docket No. UT-023003

REPLY DECLARATION OF DR. TIMOTHY J. TARDIFF FILED ON BEHALF OF VERIZON NORTHWEST INC.

HM 5.3 REVISED CRITIQUE

Deleted: HM 5.3

APRIL 26, 2004

Exhibit TJT-6T

I	Exhibit TJT	-6T /	Deleted: 7
	Docket No. UT-0230	003 /	Deleted: 6
ļ		-	Deleted: HM 5.3
	TABLE OF CONTENTS		Deleted: 41
	TABLE OF CONTENTS		Deleted: 37
			Deleted: 41
	I. INTRODUCTION	1 ///	Deleted: 37
			Deleted: 56
	II. ECONOMIC ISSUES	<u>Z</u> .//	Deleted: 55
	III. OVERVIEW OF HM 5.3 REVISED.	16	Deleted: HM 5.3
ļ			Deleted: 61
	IV. TRANSLATING CUSTOMER LOCATION INFORMATION INTO A VIABLE		Deleted: 59
	NETWORK DESIGN	20	Deleted: 62
		/////	Deleted: 60
	V. VALIDATION TESTS	<u>38</u>	Deleted: 66
	A. INVESTMENT LEVELS, PRICES, AND QUANTITY COMPARISONS		Deleted: 65
	B. CONSISTENCY WITH EXPECTATIONS AND PRIOR HYPOTHESES C. THE FCC'S SYNTHESIS MODEL DOES NOT VALIDATE <u>HM 5.3</u>	55	Deleted: 64
	REVISED.	59	Deleted: HM 5.3
			Deleted: 66
	VI. MAJOR CHANGES IN OUTSIDE PLANT LABOR REQUIREMENTS	60 / ///	Deleted: 65
		///	Deleted: 64
	VII. SPECIFIC MODELING ISSUES		Deleted: HM 5.3
	A. <u>HM 5.3 REVISED</u> IS NOT "INTEGRATED" AS AT&T/MCI ALLEGE	<u>64</u>	Deleted: 71
	B. SPECIFIC EXAMPLES WHERE THE HM 5.3 REVISED CALCULATIONS PRODUCE INSUFFICIENT AND/OR INACCURATE INVESTMENT	/	Deleted: 70
	1. SAI SIZE LIMIT OPTION		Deleted: 69
	2. SAI CAPACITY		Deleted: 71
	3. STRAND-DISTANCE CONSTRAINT		Deleted: 70
	4. INTEROFFICE FACILITIES		Deleted: 69
	5. END-OFFICE SWITCHING		Deleted: 72
			Deleted: 71
	VIII. EXPENSES	87,	Deleted: 70
			Deleted: 75
ļ	IX. REGULATORY SCRUTINY AND <u>HM 5.3 REVISED</u> 'S TREATMENT OF THE CONCERNS VOICED BY OTHER STATE REGULATORY	— \ \ \	Deleted: 74
I	COMMISSIONS	94	Deleted: 73
			Deleted: 81
	X. MAJOR COST CATEGORIES IN <u>HM 5.3 REVISED</u>	98	Deleted: 80
			Deleted: 79
	XI. CONCLUSIONS	. <u>99</u>	Deleted: 87
			Deleted: 85
			Deleted: 84

Exhibit TJT-2: Academic Credentials and Professional Experience

// /	
$\ $	Deleted: 41
//(Deleted: 37
16	Deleted: 41
llĥ	Deleted: 37
$\parallel ho$	Deleted: 56
IIA	Deleted: 55
IIA	Deleted: HM 5.3
$\ $	
$\ $	Deleted: 61
11	Deleted: 59
\parallel	Deleted: 62
$\ $	Deleted: 60
//	Deleted: 66
///	Deleted: 65
//	Deleted: 64
\parallel	Deleted: HM 5.3
//	Deleted: 66
/	Deleted: 65
1	Deleted: 64
Ĵ	Deleted: HM 5.3
	Deleted: 71
	Deleted: 70
	Deleted: 69
	Deleted: 09
\int	Deleted: 70
J	Deleted: 69
Ŋ	Deleted: 72
V.	Deleted: 71
V,	Deleted: 70
())	Deleted: 75
()()	Deleted: 74
11	Deleted: 73
	Deleted: 81
	Deleted: 80
	Deleted: 79
	Deleted: 87
	Deleted: 85
	Deleted: 84
	Deleted: 90
$\ $	Deleted: 88
	Deleted: 87
	;
$\ $	Deleted: HM 5.3
	Deleted: 97
	Deleted: 95
	Deleted: 94
	Deleted: HM 5.3
	Deleted: 101
	Deleted: 98
	Deleted: 97
	Deleted: 102
ľ	

1 I. INTRODUCTION

2 Q. PLEASE STATE YOUR FULL NAME, EMPLOYER AND BUSINESS

3 ADDRESS.

4 A. My name is Timothy J. Tardiff. I am a Vice President at National Economic Research
5 Associates ("NERA"), 1 Main Street, Cambridge, MA 02142.

Q. PLEASE DESCRIBE YOUR EDUCATIONAL BACKGROUND AND WORK
 7
 8 EXPERIENCE.
 9

10 Α. I received a B.S. degree from the California Institute of Technology in mathematics (with 11 honors) in 1971 and a Ph.D. in Social Science from the University of California, Irvine in 12 1974. From 1974 to 1979, I was a member of the faculty at the University of California, 13 Davis. I have specialized in telecommunications policy issues for over 20 years. My 14 research has included studies of the demand for telephone services, such as local 15 measured service and toll, analysis of the market potential for new telecommunications 16 products and services, assessment of the growing competition for telecommunications 17 services, and evaluation of regulatory frameworks consistent with growing competitive 18 trends.

I have extensive experience as a consultant and expert witness in regulatory
proceedings. My recent experience includes in-depth evaluations of the HAI Model
(Releases 5.2a and 5.3) and the Federal Communications Commission's ("FCC's")
universal service cost proxy model, the "Synthesis Model." I have also testified in
state proceedings and arbitrations (pursuant to the Telecommunications Act of 1996) on
local network unbundling, universal service funding, and most recently implementing the
FCC's Triennial Review Order ("TRO"), in Alabama, Alaska, Arkansas, California, the

	Exhibit TJT-6T Docket No. UT-023003
	Formatted: Right
1	District of Columbia, Indiana, Kansas, Kentucky, Maine, Maryland, Massachusetts,
2	Missouri, New Hampshire, New Jersey, New York, North Carolina, Ohio, Oklahoma,
3	Pennsylvania, Rhode Island, South Carolina, Texas, Vermont, and Virginia. A copy of
4	my curriculum vitae is attached hereto as Exhibit TJT-1.
5 Q.	PLEASE SUMMARIZE YOUR TESTIMONY.
6 A.	AT&T Communications of the Pacific Northwest, Inc. ("AT&T") and WorldCom, Inc. (d/b/a
7	"MCI") (collectively "AT&T/MCI") have submitted the HAI Model, Release 5.3 (<u>"HM 5.3</u>
8	Revised" or "Model") for the purpose of calculating Verizon Northwest Inc.'s ("Verizon
9	NW") forward-looking costs of providing unbundled network elements ("UNEs") in
10	Washington. I have reviewed the supporting testimonies of Dr. Mercer, Mr. Donovan,
11	and Dr. Bryant filed on behalf of AT&T/MCI, ¹ and have analyzed <u>HM 5.3 Revised</u> 's
12	calculations and outputs. Bas ed on this evaluation, as well as the Reply Declarations of
13	Messrs. Dippon, Murphy, and Richter, I conclude that <u>HM 5.3 Revised</u> produces UNE
14	cost estimates that are significantly lower than the economic costs Verizon NW incurs
15	when it provides UNEs to competitive local exchange carriers ("CLECs").
16	For a cost model to produce accurate estimates of the economic costs a carrier
17	incurs in offering UNEs, it must accurately represent both the quantities and types of
18	network facilities (e.g., the number of poles, the length of 25-pair buried cables, etc.) and
19	the prices a carrier pays for these facilities. In addition to the investments associated
20	with network facilities, a cost model must also incorporate accurate estimates of the
21	costs necessary to operate the network on a going-forward basis. Modeling reasonable
22	quantities of network facilities requires a realistic depiction of the efficiencies available to
15 16 17 18 19 20 21	when it provides UNEs to competitive local exchange carriers ("CLECs"). For a cost model to produce accurate estimates of the economic costs a carrier incurs in offering UNEs, it must accurately represent both the <i>quantities</i> and <i>types</i> of network facilities (e.g., the number of poles, the length of 25-pair buried cables, etc.) and the <i>prices</i> a carrier pays for these facilities. In addition to the investments associated with network facilities, a cost model must also incorporate accurate estimates of the costs necessary to operate the network on a going-forward basis. Modeling reasonable

	Exhibit TJT-6T Docket No. UT-023003	
		Formatted: Right
1	a carrier in designing a network and purchasing facilities to be used therein. For	
2	example, the cost model must produce feeder and distribution routes of sufficient	
3	lengths, must have adequate and realistic amounts of cable and support facilities, must	
4	model enough capacity to enable efficient operation, and must depict prices for assets	Deleted: HM 5.3
5	(such as switches) that the carrier would expect to pay. A careful evaluation of $\frac{HM 5.3}{M}$	Deleted: HW 5.5
6	Revised shows that it does not provide reasonable estimates of these prices and	
7	quantities. In particular:	
8 9 10 11 12	 As described by Mr. Dippon, <u>HM 5.3 Revised's cluster input data</u>, which are intended to approximate the incumbent local exchange carrier's ("ILEC") distribution areas, do not adequately represent the routes necessary to connect customer locations to the proper types and amounts of loop facilities along those routes. In 	Deleted: HM 5.3
13 14	addition, as Mr. Murphy describes, the engineering criteria used to produce <u>HM 5.3 Revised's clusters do not comport with how</u>	Deleted: HM 5.3
15	an engineer would design outside plant. ²	
16 17	HM 5.3 Revised does not provide the requisite amounts of capacity necessary to operate a network efficiently.	Deleted: HM 5.3
18 19 20 21 22 23 24	 To a large extent and particularly for the amount of labor required to engineer and install telephone plant the prices recommended by Mr. Donovan for purchasing and installing network facilities are based on the unsubstantiated, subjective judgment of AT&T/MCI's consultants and/or dated and unverifiable sources that are not Washington-specific. As Mr. Murphy describes in detail,³ these recommended prices fail to 	
	(continued) ¹ Mr. Donovan's testimony was also filed on behalf of XO Washington, Inc.	
I	² In particular, the Reply Declarations of Messrs. Dippon and Murphy take issue with the statement: "Thus, the clusters developed pursuant to this process are likely to be the most closely representative of actual telephone distribution areas as determined by outside plant engineers." Before the Washington Utilities and Transportation Commission, Docket UT-023003, Supplemental Direct Testimony of Dr. Robert A. Mercer on behalf of AT&T Communications of the Pacific Northwest, Inc. (Jan. 23, 2003) at Exhibit RAM-4 (HAI Model Release 5.3 Model Description ("Model Description")) at p. 35 ("Mercer Supplemental Direct Testimony"). Unless otherwise specified, my analyses are based on the version of <u>HM 5.3 Revised</u> filed by AT&T Communications of the Pacific Northwest, Inc. (Jan. 23, 2003) at Exhibit RAM-4 (HAI Model Release 5.3 Model Description ("Model Description")) at p. 35 ("Mercer Supplemental Direct Testimony"). Unless otherwise specified, my analyses are based on the version of <u>HM 5.3 Revised</u> filed by AT&T Communications of the Pacific Northwest, Inc. (Jan. 23, 2003) at Exhibit RAM-4 (HAI Model Release 5.4 Model Northwest, Inc. (Mater Supplemental Direct Testimony"). Unless otherwise specified, my analyses are based on the version of <u>HM 5.3 Revised</u> filed by AT&T Communications of the Pacific Northwest, Inc. (Mater Supplemental Direct Testimony").	Deleted: new

Northwest, Inc. ("AT&T") on June 4, 2004. ³ Murphy Reply Testimony at Section II.

Deleted: HM 5.3 Deleted: April 9

		Exhibit TJT-6T Docket No. UT-023003	Formatted: Right
1 2 3 4		comport with what Verizon NW expects to pay on a going- forward basis for network facilities and, in some cases, differ in implausible ways from what Mr. Donovan recommended in previous proceedings involving prior versions of the HAI Model. ⁴	
5 6 7 8 9 10		 <u>HM 5.3 Revised</u> does not properly represent the economic conditions a carrier providing UNEs would encounter. In addition to providing insufficient levels of capacity, the cost of capital and depreciation inputs used by Dr. Mercer are not consistent with the risks that a competitive provider of UNEs would face, especially one that was subject to regulatory determined 	Deleted: HM 5.3
11 12 13 14 15 16 17		reductions in UNE prices several times over the economic lives of network assets. ⁵ In addition, <u>HM 5.3 Revised</u> 's switch cost algorithm assumes, unrealistically, that an efficient carrier would instantaneously purchase all new switches at deep discounts. In the real world, however, carriers purchase large portions of their switching equipment at higher prices as they equip different locations at different points in time.	Deleted: HM 5.3
18	Q.	HAVE AT&T/MCI ENDEAVORED TO TEST OR VALIDATE THE COST	
19		ESTIMATES PRODUCED BY <u>HM 5.3 REVISED</u> ?	Deleted: HM 5.3
20	Α.	No. AT&T/MCI have not tested, let alone verified, whether <u>HM 5.3 Revised produces</u>	Deleted: HM 5.3
21		valid and accurate estimates of network investments, operating costs, and UNE costs. ⁶	
22		Because telecommunications networks and the cost models that depict them are	
23		incredibly complex, quantitative tests of model outcomes are essential to determine	
24		whether the cost model is functioning properly and producing costs that an actual carrier	
25		offering UNEs in the real world can reasonably expect to achieve. Such quantitative	
l	prev	example, the prices for installed copper and fiber cable are considerably lower than the prices used in rious versions of the HAI Model, primarily due to <u>HM 5.3 Revised</u> 's unreasonable reductions for engineering installation labor costs.	Deleted: HM 5.3
	<i>Ren</i> Fed	re the Federal Communications Commission, CC Docket Nos. 01-338, 96-98, 98-147, <i>Report and Order on nand and Further Notice of Proposed Rulemaking</i> (rel. Aug. 21, 2003) at ¶¶ 680 and 689 ("TRO"); Before the eral Communications Commission, CC Docket No. 03-173, <i>Notice of Proposed Rulemaking</i> (rel. Sept. 15, 3) at ¶¶ 83-84 ("TELRIC NPRM").	

⁶ See, e.g., Before the Washington Utilities and Transportation Commission, Docket No. UT-023003, Joint Responses of AT&T & MCI to Verizon's First Set of Data Requests (July 24, 2003) at Response Nos. 1-7 and 1-(continued...)

	Docket No. UT-023003	
	←	Formatted: Right
1	tests should determine, for example, whether the investment levels (e.g., on a per-line	
2	basis) produced by the Model approximate the investment levels that carriers actually	
3	have achieved.	
4	An additional validation test is whether successive releases of the HAI Model	
5	(typically sponsored by AT&T/MCI's witnesses in this proceeding) are consistent with	
6	reasonable trends in the industry. For example, in arguments before the United States	
7	Supreme Court and, most recently, in the FCC's ongoing total element long run	
8	incremental cost ("TELRIC") investigation, CLECs argued that the FCC's TELRIC rule	
9	could produce loop costs that are <i>higher</i> than historical levels because only the	
10	computer-based network components (e.g., switching) were subject to large productivity	
11	gains. ⁷ Despite these prior unqualified observations that loop costs should not be	Deleted: HM 5.3
12	expected to decline, HM 5.3 Revised produces the opposite outcome – AT&T/MCI's	
13	proposed loops costs are substantially lower than those produced by previous versions	
14	of the HAI Model.	Deleted: HM 5.3
15	In fact, HM 5.3 Revised falls short on both validation tests:	Deleted. Hivi 0.5

Exhibit TJT-6T

Do

ckot Nic

(...continued)

20; Before the Washington Utilities and Transportation Commission, Docket No. UT-023003, *Joint Responses of AT&T & MCI to Verizon's Sixth Set of Data Requests* (Aug. 5, 2003) at Response Nos. 6-5 and 6-33.

⁷ "Although the computer-based elements of the network (such as the switches) may be characterized by declining costs, other elements (such as the loop plant) are not declining; for many elements costs are rising." WorldCom, Inc. v. Verizon Communications, Inc., Reply Brief for Petitioners WorldCom, Inc., the Association for Local Telecommunications Services, and Competitive Telecommunications Association, No. 00-555 (July 23, 2001) at p. 6 (emphasis added). Indeed, during the October 10, 2001 argument before the U.S. Supreme Court, Donald Verrilli, counsel for MCI, correctly explained that loop costs have not come down over time. *Verizon Communications, Inc. v. Federal Communications Commission,* No. 00-511, et al., Oral Argument before the Supreme Court (Oct. 10, 2001) at pp. 74-75 ("Supreme Court Argument"). In fact, the U.S. Supreme Court's decision upholding TELRIC made the same observation with respect to loop costs. *See Verizon Communications Inc. v. Federal Communications Commission,* 122 S. Ct. 1646 (May 13, 2002). AT&T/MCI have repeated these arguments in the ongoing TELRIC NPRM. *See, e.g.,* Before the Federal Communications Commission, CC Docket Nos. 01-338, 96-98, 98-147, *Comments of AT&T Corp.* (Dec. 16, 2003) at pp. 99-100.

	<u>Exhibit TJT-6 T</u> Docket No. UT-023003	
	<u></u>	Formatted: Right
1 2	 HM 5.3 Revised produces investment levels that are less than 30 percent of the cost of reproducing Verizon NW's network.⁸ While 	Deleted: HM 5.3
3 4 5 6	some reduction might be expected for some facilities, such as switching, <u>HM 5.3 Revised</u> makes large across-the-board reductions. In fact, the reduction for cable and wire facilities (copper cable, fiber cable, and their support structures) is even	Deleted: HM 5.3
7 8 9 10 11	more drastic. Similar reductions occur for expenses. For example, HM 5.3 Revised assumes, unrealistically, that an "efficient carrier" serving Verizon NW's customers could maintain the same number of switch locations, serving the same customer volumes, and using the same switch technology (i.e., digital), for	Deleted: HM 5.3
12 13 14 15 16 17 18 19 20	 only 56 percent of the costs incurred by Verizon NW in 2002. Contrary to MCI's statements to the United States Supreme Court,⁹ loop costs have declined substantially over successive versions of the HAI Model presented to the Washington Utilities and Transportation Commission ("Commission"). In 1997, Version 3.1 produced a loop cost of \$14.58;¹⁰ and in this Commission's 1998 universal service proceeding, HM 5.0a produced a loop cost of \$12.62.¹¹ This year, AT&T/MCI advocate a loop cost of \$8.50, which is less than 43 percent of 	Deleted: 7.64
21 22	this Commission's current rate of \$20. ¹² Such drastic across-the-board reductions are unwarranted and cast serious doubt	Deleted: 0
23	on the reliability of the UNE cost estimates produced by HM 5.3 Revised.	Deleted: HM 5.3
	⁸ While a reproduction cost is not exactly the same as a forward-looking economic cost, particularly when technologies are changing rapidly, it provides a reasonable benchmark, especially when: (1) the actual and forward-looking facilities are the same (e.g., digital switching); and (2) the components of the network are not subject to rapid technological advance.	
	⁹ See note 7 supra.	
	¹⁰ Before the Washington Utilities and Transportation Commission, Docket Nos. 960369, -370, -371, Supplemental Direct Testimony of John C. Klick (February 21, 1997) (sponsoring Hatfield Model Release 3.1).	
	¹¹ Before the Washington Utilities and Transportation Commission, Docket No. 980311(a), <i>Direct Testimony of Robert Mercer on behalf of AT&T & MCI</i> (June 15, 1998) (sponsoring HAI Model, Release 5.0a).	
	¹² Before the Washington Utilities and Transportation Commission, Docket Nos. 960369-, -370, -371, Eighth Supplemental Order Interim Order Establishing Costs for Determining Prices in Phase II; and Notice of	

Deleted: less than

Prehearing Conference (April 16, 1998) at ¶ 270 ("1998 Eighth Supp. Order"). In fact, the line-weighted average of the current deaveraged loop rates is over \$24.00, implying that AT&T/MCI's proposed loop rate is a little more than one-third of the existing rate.

⁶

1 II. ECONOMIC ISSUES

Q. DO YOU AGREE WITH DR. MERCER'S CLAIM THAT <u>HM 5.3 REVISED IS THE MOST</u> 3 APPROPRIATE MODEL FOR ESTIMATING VERIZON NW'S FORWARD-LOOKING 4 COSTS OF PROVIDING UNES?

No. Dr. Mercer claims, incorrectly, that <u>HM 5.3 Revised</u> is the most appropriate model 5 Α. for determining Verizon NW's forward-looking costs (and alleges this is consistent with 6 FCC's TELRIC rules).¹³ In order to assess this claim, it is essential to understand the 7 FCC's intent in establishing TELRIC. The FCC's TELRIC methodology is intended to 8 9 identify an incumbent carrier's actual forward-looking costs,¹⁴ and thus replicate, "to the extent possible, the conditions of a competitive market."¹⁵ Indeed, in its last brief to the 10 United States Supreme Court (in the case that upheld its TELRIC rules), the FCC 11 explained that the costs of the ILEC itself were the focus of the TELRIC rules: 12 13 The costs measured by TELRIC are nonetheless those of the incumbent itself. Those costs are based, moreover, on actual prices 14 of equipment that is commercially available today - equipment that 15 16 carriers are already using to upgrade and expand their networks.¹⁶

7

Deleted: HM 5.3

Formatted: Right

Deleted: HM 5.3

Exhibit TJT-6T Docket No. UT-023003

¹³ Mercer Supplemental Direct Testimony at pp. 5, 9 -10. In addition, Dr. Bryant made similar claims for the version of HM 5.3 that AT&T/MCI submitted last year. Before the Washington Utilities and Transportation Commission, Docket No. UT-023003, Direct Testimony of Dr. Mark T. Bryant on behalf of AT&T Communications of the Pacific Northwest, Inc. and WorldCom, Inc. (June 26, 2003) at pp. 1-2 ("Bryant Direct").

¹⁴ The FCC's TELRIC methodology is intended to produce "costs that incumbents actually expect to incur in making elements available to new entrants." In the Matter of Implementation of the Local Competition Provisions in the Telecommunications Act of 1996, CC Docket No. 96-98, *First Report and Order*, FCC 96-325 (rel. Aug. 8, 1996) ("First Report and Order") at ¶ 685.

¹⁵ First Report and Order at ¶ 679.

¹⁶ Verizon Communications, Inc. v. Federal Communications Commission, No. 00-511, et al., Reply Brief for Petitioners Federal Communications Commission and the United States (July 2001) at p. 6 (See, e.g., AT&T v. FCC, 220 F.3d 607, 617 (D.C. Cir. 2000) (state commission, in setting TELRIC price for switching element, looked to prices of switches recently purchased by incumbent)).

Formatted: Right Deleted: HM 5.3

1	HM 5.3 Revised does not adhere to this TELRIC standard because it does not accurately
2	estimate the total costs that Verizon NW, or any efficient carrier, can "actually expect to
3	incur," ¹⁷ even under forward-looking conditions.
4	The test of whether any particular model is consistent with TELRIC principles
5	centers on whether the cost model produces the quantities and types of equipment that
6	would be observed in a competitive market and whether (as the FCC explained) the
7	prices for the equipment approximate what carriers pay today. As explained by Mr.
8	Murphy, ¹⁸ many of the cost inputs recommended by AT&T/MCI, especially for installation
9	labor, are based solely on the judgments of Mr. Donovan and his engineering team, the
10	majority of which were formed many years ago and are unsupported by any empirical
11	evidence.
11 12	evidence. AT&T/MCI interpret TELRIC to require ubiquitous replacement; their theoretical
12	AT&T/MCI interpret TELRIC to require ubiquitous replacement; their theoretical
12 13	AT&T/MCI interpret TELRIC to require ubiquitous replacement; their theoretical construct assumes that a new entrant would deploy facilities to "efficiently" accommodate
12 13 14	AT&T/MCI interpret TELRIC to require ubiquitous replacement; their theoretical construct assumes that a new entrant would deploy facilities to "efficiently" accommodate a known and fixed level of demand, more or less precisely located. Although, as Mr.
12 13 14 15	AT&T/MCI interpret TELRIC to require ubiquitous replacement; their theoretical construct assumes that a new entrant would deploy facilities to "efficiently" accommodate a known and fixed level of demand, more or less precisely located. Although, as Mr. Dippon demonstrates, their Model fails to locate customers with any precision. ¹⁹ In
12 13 14 15 16	AT&T/MCI interpret TELRIC to require ubiquitous replacement; their theoretical construct assumes that a new entrant would deploy facilities to "efficiently" accommodate a known and fixed level of demand, more or less precisely located. Although, as Mr. Dippon demonstrates, their Model fails to locate customers with any precision. ¹⁹ In building a network under such favorable circumstances, AT&T/MCI assume that the
12 13 14 15 16 17	AT&T/MCI interpret TELRIC to require ubiquitous replacement; their theoretical construct assumes that a new entrant would deploy facilities to "efficiently" accommodate a known and fixed level of demand, more or less precisely located. Although, as Mr. Dippon demonstrates, their Model fails to locate customers with any precision. ¹⁹ In building a network under such favorable circumstances, AT&T/MCI assume that the hypothetical new entrant will enjoy the following advantages: (1) facilities are directly
12 13 14 15 16 17 18	AT&T/MCI interpret TELRIC to require ubiquitous replacement; their theoretical construct assumes that a new entrant would deploy facilities to "efficiently" accommodate a known and fixed level of demand, more or less precisely located. Although, as Mr. Dippon demonstrates, their Model fails to locate customers with any precision. ¹⁹ In building a network under such favorable circumstances, AT&T/MCI assume that the hypothetical new entrant will enjoy the following advantages: (1) facilities are directly routed to customer locations, even though a carrier that builds sequentially as demand

¹⁷ First Report and Order at ¶ 685.

¹⁸ Murphy Reply Testimony at Section VI.

¹⁹ Dippon Reply Testimony at Section V.

Formatted: Right

Deleted: HM 5.3

1		opportunities exist to share structures (e.g., utility poles and buried cable) with other
2		carriers; (4) there are economies of scale related to mass deployment of facilities, such
3		as telephone poles, because work crews can be deployed more efficiently than those of
4		actual telephone companies; ²⁰ (5) much greater initial discounts are available because
5		all equipment is purchased at the same time to serve the entirety of demand; and (6) the
6		latest vintages of technology can be deployed ubiquitously throughout the network, even
7		in cases where compatibility among various network components would make such
8		deployment uneconomic for any real firm. As discussed more fully below, such an
9		aggressive interpretation of TELRIC is extremely unrealistic and inconsistent with the
10		FCC's pronouncements on the matter.
11 12	Q.	PLEASE EXPLAIN HOW AT&T/MCI'S INTERPRETATION OF TELRIC IS
12 13 14		INCONSISTENT WITH THE FCC'S PRONOUNCEMENTS ON THE MATTER.
15	Α.	The FCC does not require such an aggressive interpretation of TELRIC; ²¹ indeed, such
16		an interpretation could never produce accurate UNE cost estimates. Assuming a level of
17		"efficiency" that no real carrier can achieve does not approximate competitive conditions,
18		but rather only serves to produce uneconomically low cost estimates. In particular, the
19		hypothetical routes modeled and facilities deployed by HM 5.3 Revised do not take into
20	I	account real-world obstacles such as rivers and roads an erroneous modeling
21		technique that unjustifiably decreases costs.

²⁰ Before the Federal Communications Commission, WC Docket No. 03-173, Declaration of Michael D. Pelcovits on behalf of MCI (Dec. 16, 2003) at p. 29.

(continued...)

²¹ Most recently, the FCC tentatively concluded that TELRIC rules should more closely account for real-world attributes of an incumbent's network. TELRIC NPRM at ¶ 52. Interestingly, the FCC's Wireline Competition Bureau's opinion in the Virginia arbitration found Verizon's models, which are informed by characteristics of the existing network, to be consistent with forward-looking cost principles. See e.g., Before the Federal

Formatted: Right

1			
1		Moreover, HM 5.3 Revised's modeling of lower amounts of capacity (or higher fill	Deleted: HM 5.3
2		factors) than Verizon NW maintains in its network is similarly flawed. The FCC has	
3		rejected claims that lower amounts of capacity are necessarily consistent with TELRIC	
4		principles, ²² perhaps in recognition of the fact that, because Verizon NW's interstate	
5		services have been subject to price-cap regulation for well over 10 years and the bulk of	
6		its intrastate services are subject to price regulations throughout its multi-state territory, it	
7		has strong incentives to employ economically efficient amounts of capacity. ²³	
8		Accordingly, current levels of capacity are assumed to be reasonable, as evidenced by	
9		the fact that these levels have remained stable over time.	
10	Q.	DOES HM 5.3 REVISED'S NETWORK DESIGN INCLUDE ALL RELEVANT	Deleted: HM 5.3
11 11		ECONOMIC COSTS?	
12	Α.	No. <u>HM 5.3 Revised</u> specifically excludes, by design, the costs incurred in operating a	Deleted: HM 5.3
13		dynamic network (i.e., one with sufficient capacity) on a going-forward basis. A network	
14		with insufficient capacity to accommodate churn, irregularly distributed demand,	
15		fluctuations in demand over time, and overall growth in demand, cannot serve a carrier's	
16		customers without an unacceptable risk of service disruption or a high probability that	
17		customer demand for service would go unsatisfied. A network cannot be said to "serve"	
18		existing demand if it is not flexible enough to accommodate changes and	
19		rearrangements in that demand. As Mr. Murphy explains, engineering guidelines for	

(...continued)

Communications Commission, CC Docket Nos. 00-218, -249, 251, *Memorandum Opinion and Order* (rel. Aug. 29, 2003) at ¶ 49 ("Virginia Arbitration Order").

²² Joint Application by BellSouth Corporation, BellSouth Telecommunications, Inc., and BellSouth Long Distance, Inc. for Provision of In-Region, InterLATA Services In Georgia and Louisiana, CC Docket No. 02-35, *Memorandum Opinion and Order*(May 15, 2002) at ¶ 70 ("BellSouth Order").

Formatted: Right

1	local exchange networks are designed to cope with three undeniable facts: (1) demand
2	changes over time; (2) demand is uncertain, both as to place and time (i.e., it cannot be
3	determined in advance which customers will move, when they will move, or how many
4	lines they will want); and (3) technological change and changing market conditions
5	require periodic upgrades to software and hardware. ²⁴ In this environment, it is not
6	efficient for a telecommunications carrier to install only the equipment it will need at a
7	single point in time. Rather, an efficient carrier will install plant that includes enough
8	capacity so that the utilization of that capacity (e.g., "fill factors") are adequate to: (1)
9	accommodate movement of existing customers and their services, (2) meet short-run
10	demand growth (e.g., two to three years for new switches), and (3) implement growth
11	jobs and upgrades over the life of the plant. Therefore, to minimize costs, efficient firms
12	continually adjust their factors of production to augment and replace facilities. The long-
13	run costs of all real-world networks reflect this fundamentally dynamic optimization
14	process.
15	Economists recognize that the textbook long-run case i.e., a period long enough
16	to allow a firm to reach its optimum scale of operation is a hypothetically limiting one,
17	and does not reflect the conditions pursuant to which real-world telecommunications
18	firms operate. Even new entrants are constrained by current conditions, including the
19	inherent uncertainty in the location and amount of customer demand over time. No firm
20	has sufficient knowledge about current and future technologies to determine, in advance

(...continued)

 $^{^{23}}$ The FCC's TELRIC NPRM explored this proposition. See TELRIC NPRM at \P 58.

 $^{^{\}rm 24}$ Murphy Reply Testimony at Section V.

Docket No. UT-023003 Formatted: Right of making any investment decisions and with perfect certainty, what its global cost-1 2 minimizing scale of operations might be. Further, technologies are not perfectly 3 foreseeable. Therefore, a real-world firm necessarily makes investment decisions 4 without perfect knowledge of the future of technology or demand, but with the 5 expectation that demand will grow and shift over time and that facilities will be relieved 6 and replaced. The uncertainties of demand in the real world cannot be eliminated, no Deleted: HM 5.3 7 matter how "forward-looking" or "long-run" the approach.²⁵ HM 5.3 Revised, with its 8 static view of the network, and its idealized notion of what is required to provide service -9 - particularly as reflected in its utilization and certain equipment price inputs -- assumes an unrealistic level of efficiency that is in no way required by TELRIC. 10 Q. PLEASE DESCRIBE SOME OF THE PROBLEMS ASSOCIATED WITH HM 11 5.3'S APPROACH TO MODELING A FORWARD-LOOKING NETWORK. 12 Deleted: HM 5.3 13 Α. One of the problems with <u>HM 5.3 Revised</u>'s modeling approach is its removal of a substantial amount of the current, and very real, costs needed to accommodate growth 14 Deleted: HM 5.3 15 and respond to changes in demand. HM 5.3 Revised implicitly assumes that an ILEC 16 would instantly size its entire outside plant network based on the amount and location of 17 current demand, and thereby realize unrealistic economies that can only be obtained

Exhibit TJT-6T

²⁵ This issue is addressed by the application of "real options" theory to telecommunications costing. Professor William Baumol, a prominent economist and frequent consultant to AT&T, described this theory as follows:

[O]ne can characterize the pertinent part of the new analysis as follows. It tells us that investment decisions typically have a cost component that has usually been overlooked, so that the total costs of such decisions (and, hence, their appropriate price) is normally underestimated. The overlooked cost component is the narrowing of future choices that a current investment commitment entails. By making such a commitment, the decision makers forego some of their future options. The decisions preclude choices the decision makers *may* prefer to change as the passage of time increases the information available to them. But such changes are no longer open to them because of their investment commitment.

William J. Baumol, "Option Value Analysis and Telephone Access Charges," in James Alleman and Eli Noam, eds., *The New Investment Theory of Real Options and its Implications for Telecommunications Economics*, Boston: Kluwer (1999).

<u>Exhibit TJT-6T</u> Docket No. UT-023003

Form	atted:	Riaht

1	
1	when total demand is served by ideally-sized facilities purchased at maximum volume
2	discounts. This assumption is counterfactual: real-world firms must grow to meet
3	demand as it materializes over time (growth), and must be structured to respond to shifts
4	in demand at particular locations (churn). Firms including efficient ILECs, as well as
5	new entrants - add capacity over time, taking into account the trade-off between the
6	lower per unit costs of bigger modules (e.g., larger switches and larger cable sizes), the
7	costs incurred to add capacity (a particularly significant factor for outside plant facilities),
8	and the costs of carrying unused capacity. The markets for critical inputs (e.g., switches,
9	outside plant facilities, and the labor to install them) reflect these fundamental facts.
10	Indeed, carried to its logical conclusion, insistence on the proposition that TELRIC costs
11	should assume that the network could be built instantaneously would require much
12	higher prices for such inputs to reflect the supply constraints that such a scenario would
13	necessarily impose.
14	With regard to switch prices, approximating what a carrier pays today must
15	account for factors such as: (1) economic choices among multiple vendors, and (2) the
16	relative mix of new and add-on equipment that the carrier expects to incur. HM 5.3
17	Revised's assumption that Verizon NW's switches will be purchased at deeply
18	discounted new switch prices fails to reflect Verizon NW's forward-looking costs. In the
19	competitive market that TELRIC is designed to emulate, new entrants (or incumbents for
20	that matter) would not purchase only new switches to serve their entire volume of lines

Deleted: HM 5.3

Formatted: Right

1 and usage at a single point in time.²⁶ Rather, competitive carriers would purchase a mix

2 of new and add-on modules.²⁷

3 Q. ARE <u>HM 5.3 REVISED</u>'S COST OF CAPITAL AND DEPRECIATION ASSUMPTIONS 4 TELRIC-COMPLIANT?

5 Α. No. Economic depreciation and cost of capital rates are intended to approximate how a 6 firm would recover its investments given the competitive conditions anticipated (or 7 assumed) by a given cost model. AT&T/MCI's aggressive interpretation of TELRIC 8 implicitly assumes extremely competitive conditions that are fundamentally at odds with 9 how AT&T/MCI assume Verizon NW would recover and earn a return on its investment over time. In particular, they assume, unrealistically, the existence of a competitive 10 environment wherein: (1) a large proportion of a firm's costs are for assets with long 11 lives; (2) some of these assets are subject to technological advancement (and hence 12 13 declining prices over time); (3) the competitive environment provides no guarantee that 14 the expected demand will be sustained over the anticipated economic life of the assets; and (4) UNE prices will be provided at regulated prices indefinitely.²⁸ In stark contrast, 15

14

Deleted: HM 5.3

²⁶ Even if there were a firm that would purchase only new switches (which is unlikely), it would be highly improbable for vendors to offer the same new switch discounts, because there would not be an opportunity to charge higher prices on a sufficiently large volume of add -on lines to make up for the low new equipment prices. For example, if the add-on price were twice the new line price, and a mix of 50 percent new lines and 50 percent add-ons permitted a vendor to recover its cost, a 90/10 mix would not allow the vendor to recover its costs.

²⁷ More generally, Verizon NW's equipment prices reflect the specific terms offered by equipment vendors, *including the expectations by both parties about the relative mix of new and add-on equipment.* It is thus incorrect to mix and match Professor Baumol's long run (where contacts and commitments have expired) with the extreme short run of a particular contract (see First Report and Order at n.1682). It is also interesting to observe that the FCC's First Report and Order does not even remotely menti on price concerns when explaining why a long-run study is desirable. See First Report and Order, *passim* The FCC noted, "The 'long run' approach ensures that rates recover not only the operating costs in the very short run, but also fixed investment costs that, while not variable in the short term, are necessary inputs directly attributable to providing the element." First Report and Order at ¶692.

²⁸ AT&T/MCI have essentially ignored the FCC's directive to assume the existence of facilities-based competition in estimating depreciation and cost of capital rates. Instead, they continue to insist that there will be little to no (continued...)

Formatted: Right

1		the Model then treats recovery of investment essentially the same as a guaranteed loan	
2		for the duration of the economic life i.e., HM 5.3 Revised determines the constant	Deleted: HM 5.3
3	I	payment Verizon NW would need to collect each and every period in order to depreciate	
4		its assets and earn an economic return on the assets' remaining value. This	
5		misalignment of competitive assumptions with the assumed pattern of cost recovery	
6		necessarily means that Verizon NW could not recover the costs of its investments in a	
7		way analogous to a long-term loan.	
8	Q.	WHAT IMPACT WOULD THE EXTREMELY COMPETITIVE CONDITIONS IMPLIED	
9		BY AT&T/MCI'S AGGRESSIVE INTERPRETATION OF TELRIC HAVE ON THE	
10		SELECTION OF ACCURATE VALUES FOR DEPRECIATION AND COST OF	
11		CAPITAL?	
12	Α.	The Model's over-arching assumption that an "efficient firm" is one that	
13		instantaneously sizes its network to "optimally" accommodate current demand at current	
14		locations necessarily implies significantly shorter depreciation lives and a significantly	
15		higher cost of capital than are typically experienced in regulated industries. AT&T/MCI	
16		are able to achieve unreasonably low UNE cost estimates, in part, by failing to account	Deleted: HM 5.3
17		for the shorter depreciation lives and higher cost of capital necessitated by HM 5.3	Deleted: nivi 5.3
18		Revised's assumptions.	

(...continued)

competition for network elements, and, at the same time, justify the use of the hyper-competitive assumptions regarding network equipment discussed above on the basis of a "perfect contestability" assumption. See e.g., Before the Federal Communications Commission, CC Docket No. 03-173, Declaration of Robert D. Willig (Dec. 16, 2003) at pp. 52-59. The fundamental flaw with this line of reasoning is that the assumptions underlying "perfect contestability" (i.e., that entry and exit are costless) are at odds with the characteristics of telecommunications networks, (i.e., a cost structure with a high representation of long-lived capital assets, many (continued...)

1		In addition, the Model assumes that the optimally -configured and perfectly -sized		
2		network that is built today will again be instantaneously replaced every few years when		
3		prices are recalculated based upon another all-new network. Again, assumptions such		
4		as this require shorter depreciation lives and a higher cost of capital in the real-world,		
5		carriers investing in assets with long lives are substantially constrained by such		
6		investments because long-term investments are likely to become "stranded" if they are		
7		assumed to be replaced every few years by an all-new, optimally -configured network		
8		using the most recent technologies available. This need for shorter depreciation lives		
9		and a higher cost of capital is true not only for assets that experience relatively high rates		
10		of technological progress (such as switches), ²⁹ but also for assets such as outside plant		
11		facilities, because <u>HM 5.3 Revised</u> 's assumptions would render the ILEC's formerly	Deleted: HM 5.3	
12	l	"optimal" configuration inefficient. ³⁰	(<u> </u>	
13	Ш.	OVERVIEW OF_HM 5.3 REVISED	Deleted: HM 5.3	
			Deleted: HM 5.3	
14	Q.	PLEASE DESCRIBE HM 5.3 REVISED'S APPROACH TO DETERMINING THE		
15	I	GEOGRAPHIC AREAS THAT FORM THE FOUNDATION FOR ITS		
16		TELECOMMUNICATIONS NETWORK DESIGN.		

of which are subject to change), as well as the inherent uncertainty of maintaining adequate demand levels over the lives of network assets.

²⁹ See, e.g., Alfred E. Kahn, Letting Go: Deregulating the Process of Deregulation, East Lansing: Michigan State University (1998) at pp. 91-92 and Jerry A. Hausman, "Valuing the Effect of Regulation on New Services in Telecommunications," Brookings (1997). Professor Hausman estimates that annual charge factors, based on traditional regulatory depreciation and cost -of-capital, can be too low by a factor of 2 to 3.

³⁰ For example, suppose the luxury of starting from scratch allowed a hypothetical entrant to serve current lines with 20 percent fewer telephone poles than an ILEC. If this were a realistic possibility (which it is not), then the ILEC's stock of poles, in effect, would have lost 20 percent of its economic value. The depreciation rates used in <u>HM 5.3 Revised</u> completely disregard this fact.

Deleted: HM 5.3

Formatted: Right

^{(...}continued)

¹⁶

1 Α. The various releases of the HAI Model share a number of similarities with respect to 2 network design. Each of the releases presented in Washington UNE cost proceedings to 3 estimate Verizon NW's costs start with geographic areas (and associated information 4 such as the number of lines, households, businesses, and the like) that were intended --5 though failed - to represent the distribution areas that accepted telecommunications 6 engineering practices would produce. In all releases, these areas were developed prior to their inclusion in the HAI Model.³¹ In Verizon NW's previous UNE proceeding before 7 8 this Commission, the census block groups ("CBGs") used by HM 3.1 were allegedly 9 representative of distribution areas (i.e., they were considered to be representative of 10 certain aspects of engineering practice, particularly the number of households served in Deleted: HM 5.3 11 a single distribution area). In later releases, beginning with HM 5.0 and including_HM 5.3 12 Revised, an outside firm (TNS Telecoms or "TNS") developed "clusters;" and again, 13 although certain engineering criteria apparently changed between the various releases of 14 the HAI Model, they were determined by the HAI Model sponsors to be consistent with 15 proper engineering practice. That is, the geographical areas (CBGs in earlier iterations 16 and clusters in the later releases) were intended to represent the areas to which a 17 telephone engineer would design and build outside plant. 18 These geographical areas are developed outside of the Model, and the 19 documentation purportedly describing their development fails to provide the information 20 necessary to verify whether the geographic areas in fact reasonably represent what 21 would result from sound engineering practice or, for that matter, whether they accurately

Deleted: HM 5.3

Formatted: Right

³¹ See Mercer Supplemental Direct at p. 9. As discussed in more detail below, some of the most fundamental network design assumptions are hard-wired into the database that represents distribution areas, and thus cannot be modified within <u>HM 5.3 Revised</u>.

<u>Exhibit TJT-6T</u> Docket No. UT-023003

			•	Formatted: Right	
1		represent the locations to which a carrier would build telecommunications facilities (e.g.,			
2		whether the facilities' routes are the proper length). Subsequent to AT&T/MCI's January			
3		2004 re-filing, Verizon NW gained access to certain aspects of the incredibly complex			
4		and time-consuming data and processes used by TNS to transform the data provided by			
5		Verizon NW (and other data maintained by TNS) into the geographic inputs used in HM	/	Deleted: HM 5.3	
6		5.3 Revised. Mr. Dippon's Reply Declaration describes the evaluation of those data and		(<u> </u>	
7		processes, and concludes that, because the clusters produced by <u>HM 5.3 Revised</u> are		Deleted: HM 5.3	
8		so far removed from any reasonable depiction of Verizon NW's distribution areas, they			
9		could not possibly produce accurate estimates of Verizon NW's forward-looking costs of			
10		providing UNEs. ³²			
11	Q.	PLEASE DESCRIBE THE SIGNIFICANCE OF THESE CLUSTERS TO HM 5.3	/	Deleted: HM 5.3	
12		REVISED'S OVERALL NETWORK DESIGN.			
				Deleted: HM 5.3	
13	Α.	These clusters form the basis upon which, <u>HM 5.3 Revised</u> 's UNE cost estimates are	/		
14	I	calculated i.e., the lengths of facilities' routes (e.g., how much feeder plant is needed			
15		between a wire center and the center of a distribution area) and the types and amounts			
16		of plant (e.g., how much copper cable of particular size, and what type of associated			
17		support structure are needed by a firm with the luxury of building facilities on a "blank			
18		slate" to serve Verizon NW's current volumes of demand at their actual locations. Once			
19		those quantities are determined, various inputs (e.g., the cost of an installed telephone			

³² Dippon Reply Testimony at Section V.

telephone service.

20

21

18

pole) are used to determine the total investment putatively required to efficiently provide

			Formatted: Right
1		HM 5.3 Revised then makes other calculations, including determining the annual	Deleted: HM 5.3
2		capital charges associated with the investment, annual maintenance expenses, and	
3		various "overhead" expenses not directly tied to the network investment. Even if the	
4		cluster input data were accurate, the validity of the investment and associated costs	Deleted: HM 5.3
5		produced by HM 5.3 Revised depends on whether the quantities produced by the Model,	Deleted: HM 5.3
6	l	and the price inputs used to produce the investments, comport with what Verizon NW (or	
7		any other real-world carrier) could reasonably expect to achieve. To the extent the	
8		"blank slate" (1) fails to represent proper engineering design and decisions, (2) ignores	
9		real-world constraints that an actual carrier would face (e.g., routes cannot be direct	
10		because rights-or-way are not ubiquitous, carriers need adequate capacity to avoid	
11		service disruptions, etc.), (3) inaccurately represents the necessary facilities (e.g., cable	
12		sizes and support structures), and/or (4) overlooks the fact that carriers cannot always	Deleted: HM 5.3
13		purchase and install equipment under the favorable terms that <u>HM 5.3 Revised</u> assumes	Deleted: HM 5.3
14		a fictitious "blank slate" carrier would enjoy, the UNE cost estimates produced by <u>HM 5.3</u>	Deleted. This 3.5
15		Revised will not represent those that would prevail under competitive conditions. To the	
16		contrary, the cost estimates produced will be, at best, imprecise and unrealistically low.	
17	Q.	HOW IS THE REST OF YOUR TESTIMONY ORGANIZED?	
18	Α.	The rest of my Reply Testimony is organized as follows. In the next section, I discuss	
19		how information about locations of facilities should be translated into a network design. I	Deleted: HM 5.3
20		then provide several tests, which demonstrate that <u>HM 5.3 Revised</u> produces	
21	I	unreasonably low UNE cost estimates. Next, I identify a number of major changes in	
22		outside plant inputs that produce unrealistically low costs and, as Mr. Murphy explains,	

19

do not match the costs that a real-world carrier would incur. I then discuss specific

		<u>Exhibit TJT-6T</u> Docket No. UT-023003
		Formatted: Right
1		modeling issues, including certain features that appear to be inconsequential in
2		Washington, and particular aspects of the Model that produce inaccurate and/or
3		insufficient investment estimates. I then explain why the expense factors proposed by
4		AT&T/MCI produce levels of operating and related expenses that are implausibly low
5		relative to Verizon NW's current levels. Next, I discuss the results of the regulatory
6		scrutiny that AT&T/MCI offer in support of <u>HM 5.3 Revised</u> and demonstrate that they
7		have failed to address the specific concerns raised by this Commission, as well as other
8		state regulatory commissions, with respect to previous versions of the HAI Model. I then
9		identify and criticize a number of <u>HM 5.3 Revised</u> 's critical inputs and their sources. The
10		final section summarizes my conclusions.
11 12	IV.	TRANSLATING CUSTOMER LOCATION INFORMATION INTO A VIABLE NETWORK DESIGN
13	Q.	IS HM 5.3 REVISED'S APPROACH TO LOCATING CUSTOMERS AND DESIGNING A
14		NETWORK REALISTIC?
		Deleted: HM 5.3
15	Α.	No. Implicit in Dr. Mercer's claim that <u>HM 5.3 Revised</u> is the best model for estimating
16		Verizon NW's forward-looking costs is the proposition that any model that claims to
17		construct routes between customers and end-offices (loop plant), and end-offices to
18		each other (interoffice facilities), is inherently superior to a model that starts by
19		measuring some features of the current network and makes appropriate forward-looking
20		adjustments. Such a claim does not withstand careful scrutiny, and has been rejected by
21		a number of state regulatory commissions.
22		Based on the alleged superiority of a completely hypothetical and highly abstract
23		network, AT&T/MCI embark on what has proven to be an almost impossible task:

	Formatted: Right
1	designing the network of a hypothetically "efficient firm" and dictating what that firm
2	would pay for that network, telephone pole by telephone pole, wire by wire, switch by
3	switch, and so forth. This undertaking is tantamount to a competitive bid for a contract to
4	build Verizon NW's entire Washington network overnight without any financial
5	commitment to do so, and without engaging in any type of sanity check (e.g., are the
6	routes long enough; are there sufficient amounts of network components; does the
7	network design account for all the costs a firm would incur in providing UNEs?).
8	AT&T/MCI merely assert that the "least cost" algorithms that draw loop routes (i.e.,
9	TNS's development of clusters as a preprocessing step to HM 5.3 Revised, as well as
10	the development of interoffice rings by another computer program) are TELRIC-
11	compliant, and contend that the judgment of their engineering team is sufficient to
12	determine not only how a firm will build and operate its network on a going-forward basis,
13	but also what that firm can expect to pay for all of its network components.
14 Q.	HOW WOULD ONE GO ABOUT TESTING THE REASONABLENESS OF HM 5.3'S
15 NET	WORK DESIGN?
16 A.	To assess the reasonableness of HM 5.3 Revised's network design, it is useful to
17	consider what a "plan" for a new network would entail. It is necessary that: (1)
18	customers are connected to end-offices; and (2) the distribution terminal, which is the
19	end of the loop plant closest to the customers (e.g., on a telephone pole), is close to
20	where actual customers are located. These propositions are unaffected by whether the
21	routes of the current network are more or less efficient than a completely redesigned
22	network, as there is no reason to believe that distribution terminal locations could be
23	more efficiently placed.

	Formatted: Right
	Formatted. Right
1	Accordingly, a first step in evaluating the results of a cost model would be to
2	assess how distribution terminals are located. <u>HM 5.3 Revised</u> does not explicitly locate
3	these terminals. Instead, it employs the following process that can, at best, provide a
4	rough approximation of where these terminals are located: (1) start with a rectangular
5	representation of the distribution areas that TNS has provided, 33 (2) divide these
6	rectangles into "lots;" and (3) place distribution terminals at lot boundaries, e.g., at the
7	hypothetical locations of telephone poles. ³⁴ In contrast, Verizon NW's cost model starts
8	with the actual locations of most of the distribution terminals used to serve the customers
9	both models are designed to include. The distribution terminals whose locations could
10	not be identified are assigned a location that corresponds to an actual point in the
11	network serving them. Thus, from the outset, Verizon NW's cost model starts with
12	superior information concerning the portion of the network located nearest to the end-
13	users to be served. ³⁵
14	Once distribution terminals have been located, a cost model should group these
15	terminals into distinct distribution areas, presumably based on current network design
16	principles. Again, the contrast between HM 5.3 Revised and Verizon NW's cost model is
17	striking the proponents of HM 5.3 Revised assert that the generalized engineering

	³³ Mr. Dippon's Reply Testimony shows that, while <u>HM 5.3 Revised</u> treats distribution areas as rectangles, the customer locations in these areas can actually be contained in highly irregular shapes. Dippon Reply Testimony at Section V.	Deleted: HM 5.3
I	³⁴ In fact, <u>HM 5.3 Revised</u> only partially carries out this process. For example, the costs for distribution terminals are developed on a per-line basis for the entire cluster, with none of the customer location information (apart from lines) being used to estimate distribution terminal costs.	Deleted: HM 5.3
	³⁵ The <u>HM 5.3 Revised</u> model developers claim that they have accurately identified actual customer locations. Whether or not this claim is justified is a moot point since, as is explained below, <u>HM 5.3 Revised</u> does not model a network that connects actual customer locations. Instead, the Model rearranges the locations into a rectangular grill.	Deleted: HM 5.3 Deleted: HM 5.3

Form	atted:	Right

1	rules supplied by Mr. Donovan, ³⁶ and allegedly understood and correctly implemented by
2	TNS, produce more efficient distribution areas than Verizon NW's current areas. The
3	sponsors of <u>HM 5.3 Revised</u> in effect argue that: (1) Verizon NW, with the luxury of
4	starting over today, would group distribution terminals into distribution areas that are
5	different than those existing in the real network; (2) Mr. Donovan's unsubstantiated
6	opinions completely and correctly represent the process by which terminal locations
7	would be grouped; (3) TNS has correctly represented Mr. Donovan's assumptions; and
8	(4) distribution facilities would consist of simple rectangular "grills" containing branch and
9	backbone cables of generally uniform size throughout the cluster (e.g., all branch cables
10	are 50-pair), without regard to the actual customer locations or the locations of existing
11	rights-of-way. What the supporters of HM 5.3 Revised ignore, however, is that real-world
12	network designers face constraints that are not represented in Mr. Donovan's
13	assumptions or TNS's algorithms. These constraints include, but are not limited to, the
14	locations of roads and rights-of-way, natural and man-made barriers, and unevenly
15	distributed lots within distributions areas. In contrast to HM 5.3 Revised, Verizon NW's
16	cost model starts with the distribution areas in its existing network, thereby recognizing
17	the right-of-way constraints of the real world, as well as the uneven distribution of
18	customer locations.
19 Q.	ARE THERE SIMILAR PROBLEMS ASSOCIATED WITH HM 5.3 REVISED'S
20	MODELING OF FEEDER PLANT?

³⁶ Messrs. Murphy and Richter describe how these abstract rules depart from standard network engineering practice and, as a result, produce distribution areas that bear little resemblance to those of an efficient real-world local exchange carrier.

Formatted:	Right

1	Α.	Yes. A cost model should design feeder routes that run between the end-offices and the
2		serving area interfaces ("SAIs" or cross boxes) located within each distribution area.
3		Again, <u>HM 5.3 Revised</u> 's claim to greater efficiency rests on the unsubstantiated
4		assertion that: (1) TNS's and HM 5.3 Revised's algorithms for locating SAIs provide a
5		more efficient design than Verizon NW's current network; and (2) HM 5.3 Revised's "right
6		angle" feeder routing algorithms produce routes that are more efficient than what Verizon
7		NW's engineers have designed. Neither assumption is correct. <u>HM 5.3 Revised</u> 's
8	l	unrealistic network design principles ignore real-world constraints and have never been
9		validated against actual measurements based upon actual operating conditions. In
10		particular, as Mr. Dippon explains in detail, not only does HM 5.3 Revised model
11	l	significantly fewer distribution areas and place substantially fewer SAIs than Verizon NW
12		has in its Washington network, but the hypothetical locations of the SAIs are often not
13		closely aligned with the customer locations they purportedly serve. ³⁷ Similarly, the "right
14		angle" routing of feeder routes ignores any and all obstacles that may be present along
15		the two, hypothetical, straight-line segments connecting the wire centers to SAIs. ³⁸
16	Q.	IS A COMPARISON OF RELATIVE LOOP DISTANCES SUFFICIENT TO
17		UNDERSTAND THE AMOUNT OF NETW ORK EQUIPMENT REPRESENTED BY THE
18		TWO COST MODELS?

Deleted: HM 5.3

³⁷ Dippon Reply Testimony at Section V.

³⁸ <u>HM 5.3 Revised</u> assumes that feeder routes consist of a main feeder segment that may connect several clusters and subfeeder routes perpendicular to the main feeder routes. Direct routing (i.e., no accommodation for obstacles) is assumed for both main and subfeeder routes. And the feeder and subfeeder segments tend to be long – averaging on the order of 1.7 miles of putatively unobstructed distance.

<u>Exhibit TJT-6T</u> Docket No. UT-023003

Formatted: Right

1	Α.	No. Dr. Mercer attempted such a comparison during a recent workshop in California. ³⁹
2		However, while distances such as feeder route lengths are important in determining the
3		amounts of equipment to deploy (e.g., the number of telephone poles and the copper
4		cable lengths), the mix of these components is also important in determining total
5		investment and the resulting monthly costs. For example, the amounts of network
6		components for a one-mile stretch of a loop route can vary in their support structure
7		(e.g., poles versus buried), the size of the cables along the route, and so forth. These
8		differences, in turn, can produce important differences in costs. As I explain in detail
9		below, there are large variations in the cost per foot of cable and associated support
10		structure. Therefore, if HM 5.3 Revised selects an unrepresentative mix, the cost
11		estimates produced by the Model would be inaccurate. For example, if the Model placed
12		too much outside plant in low density clusters, but offset this error with too little outside
13		plant in high density areas, the average distances could be fairly close to realistic values,
14		but the distribution of costs among the density zones would be skewed.
15	Q.	HOW DOES HM 5.3 REVISED DETERMINE ROUTE LENGTHS AND THE NETWORK
16		COMPONENTS FOR THESE ROUTES?
17	Α.	It is a two-step process. First, as Mr. Dippon describes in detail, the preprocessing
18		performed by TNS establishes the broad outlines of the <u>HM 5.3 Revised</u> network i.e.,
19	1	the number and sizes of distribution areas, their density classification (to establish the

20 costs of certain inputs), the total route distance (i.e., the strand distance) within each

³⁹ Before the California Public Utilities Commission, Docket R. 93-004-03/l. 93-004-02, *Workshop Transcript* (Jan. 15, 2004) at pp. 3537-40.

		Docket No. UT-023003	
			Formatted: Right
1		distribution area, the number and types of lines, and so forth. ⁴⁰ The equipment deployed	
2	I	along these routes is then determined within <u>HM 5.3 Revised</u> itself.	Deleted: HM 5.3
2			Deleted: HM 5.3
3	Q.	DOES <u>HM 5.3 REVISED</u> "BUILD" TO THE ROUTES THAT TNS HAS DETERMINED?	
4	Α.	No. Although in determining the strand distances, ⁴¹ TNS in principle has traced routes	Deleted: HM 5.3
5		from the putative SAI for a distribution area to the locations of every customer, <u>HM 5.3</u>	
6		Revised does not use any of this information. Rather, the Model builds a rather simple	
7	I	"grill" within a rectangular area. The grill contains a certain amount of "backbone" cable	
8		of unknown sizes, ⁴² and another amount of "branch" cables, all having the same number	
9		of pairs. When the default strand distance constraint is employed, the Model then scales	
10		the sum of the "backbone" and "branch" route distances (and, if applicable, connecting	
11		routes) to equal the strand distance determined by TNS.	
12	Q.	HAVE YOU EXAMINED SOME OF THE RESULTS OF THIS PROCESS?	
13	Α.	Yes. Perhaps the most significant feature of the clusters produced by TNS is their large	
14		size, which as Mr. Dippon emphasizes cannot be changed in any fundamental way by	
15	l	modifying HM 5.3 Revised.43 Moreover, in building to such large areas, HM 5.3 Revised	Deleted: HM 5.3 Deleted: HM 5.3
4.0			Deleted: HM 5.3
16		tends to select equipment sizes that are also too large. For example, while <u>HM 5.3</u>	
17		Revised produces about 1,100 SAIs ⁴⁴ averaging 2,300 lines, VzLoop produces 3,300	
	⁴⁰ Dipi	pon Reply Testimony Section IV.	
	⁴¹ The	e strand distance is generally the minimum length required to connect customer locations to the SAI location. cording to <u>HM 5.3 Revised</u> 's documentation, right-angle routing is used in determining these lengths.	Deleted: HM 5.3
	⁴² The som	e Model selects a particular back-bone cable size (e.g., 900-pair) at the SAI, which is assumed to taper in ne unspecified manner so that the total cable investment is generally 65 percent of the amount without ering.	
	whe	pon Reply Testimony at Section V. In particular, by allowing the cl ustering process to proceed to the point ere the number of lines within, and the spatial dimensions of, clusters can be large, TNS's distribution areas er from what engineers typically design in the real world, as Mr. Murphy explains in detail.	
	44	- any test is a second of the second s	


Exhibit TJT-6T

Deleted: HM 5.3

⁴⁴ This number is somewhat larger than the number of clusters produced by TNS because, in some cases, <u>HM 5.3</u> <u>Revised</u> places multiple SAIs within a cluster.

		Exhibit TJT-6T Docket No. UT-023003
1		SAIs averaging 1,400 lines. ⁴⁵ Similarly, while, HM 5.3 Revised places about 1,100
2	I	remote terminals ("RTs") averaging about 1,100 lines each, VzLoop places about 2,760
3		RTs averaging about 370 lines.
4	Q.	HAVE YOU EXAMINED CABLE SIZES?
5	Α.	Yes. In general, HM 5.3 Revised's simplistic use of a "grill" to design distribution plant
6	I	results in relatively few cable sizes (e.g., 25-pair, 50-pair, etc.) being deployed within
7		distribution areas. And like SAIs and RTs, these cables tend to be larger than those
8		represented by VzLoop. Figure 1 shows how the ratio of the average distribution cable
9		size produced by VzLoop and <u>HM 5.3 Revised</u> varies with the number of lines in a wire
10	1	center.

I	⁴⁵ In contrast to VzLoop, which produces a file with an inventory of the specific pieces of equipment placed within each wire center, <u>HM 5.3 Revised</u> does not report such components. I derived the quantities reported here by	Deleted: HM 5.3
	performing additional calculation on an intermediate file that can be produced by interrupting a <u>HM 5.3 Revised</u> run. To put the large SAI size into perspective, in the large Bothell wire center, 19 of the 38 SAIs placed by <u>HM</u> 5.3 Revised are of the largest (7,200 line) size and account for 68 percent of the total SAI capacity. In contrast,	Deleted: HM 5.3
1	only 22 of the 135 SAIs placed by VzLoop are of the largest (5,400-line) size and account for only 35 percent of the total SAI capacity. Indeed, the <i>average</i> SAI capacity placed by <u>HM 5.3 Revised</u> for this wire center is 5,300, or almost the <i>maximum</i> capacity ever utilized in VzLoop.	- Deleted: HM 5.3

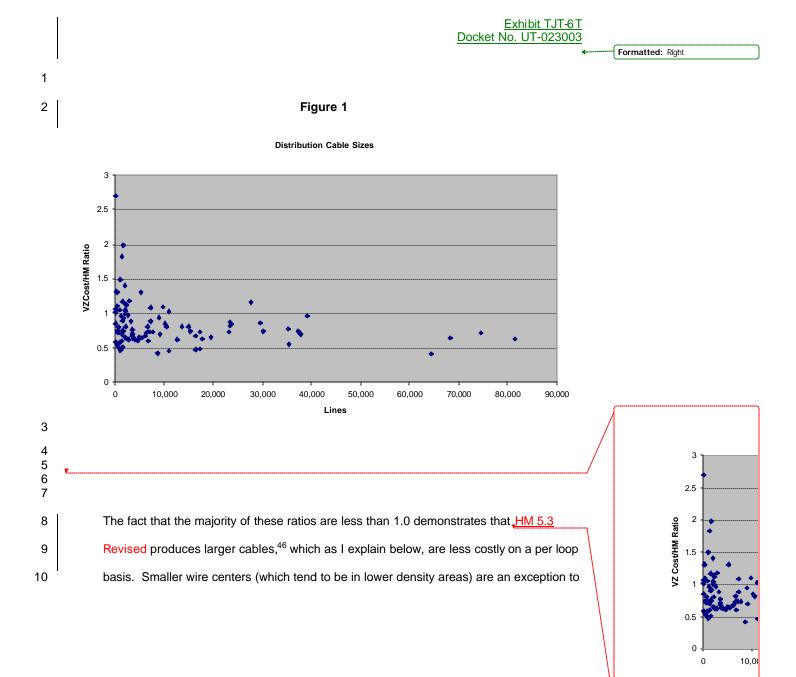

⁴⁶ Indeed, HM 5.3 Revised produces larger cables, despite the fact that its default inputs provide less spare capacity (implying smaller cable sizes than if more spare capacity was specified).

Deleted: HM 5.3 Deleted: HM 5.3

		Exhibit TJT-6T Docket No. UT-023003
		Formatted: Right
1		the general pattern in such areas, HM 5.3 Revised's average distribution cable sizes
2	I	tend to be smaller, thereby producing relatively higher costs for smaller wire centers. ⁴⁷
3	Q.	WHAT EFFECT DO HM 5.3 REVISED'S LARGE DISTRIBUTION AREAS HAVE ON
4		THE COST ESTIMATES PRODUCED BY THE MODEL?
5	Α.	From a costing standpoint, ⁴⁸ Mr. Donovan has generally selected inputs that assume
6		economies of scale for larger items (e.g., the cost per pair tends to decrease as cable
7		sizes increases). ⁴⁹ Consequently, the fact that HM 5.3 Revised tends to produce large
8	I	distribution areas results in unrealistic scale economies, and consequently low
9		investments and understated UNE cost estimates. That is, because the cost per unit of
10		larger equipment (e.g., the cost per pair foot for a large cable) is lower in many cases
11		than the costs for smaller equipment, the resulting costs (e.g., the costs for the number
12		of pair feet needed to serve an area) would be too low. For example, the larger copper
13		distribution cable sizes produced by <u>HM 5.3 Revised</u> result in an average investment per
		e average cable sizes of each of the respective models in each of the Commission's five current UNE rate es also demonstrate that generally larger cables are deployed by HM 5.3 Revised. The following table shows Deleted: HM 5.3

zones also demonstrate that generally larger cables are deployed by HM 5.3 Revised. The following table shows these results:

Average HM Average VZ UNE Distribution Cable Distribution **Lines** 286,386 Zone Cable (pairs) (pairs) 1 456 292 Deleted: 453 2 268,451 364 279 Deleted: 338 3 102,441 264 195 Deleted: 255 215 4 197,450 157 Deleted: 213 94 5 209,488 103 Deleted: 100


Only in Zone 5, the highest cost/least dense zone, are the average cable sizes even remotely comparable.

⁴⁸ Messrs. Murphy and Richter discuss, from an engineering perspective, the problems associated with modeling large distribution areas.

⁴⁹ For example, the cost per pair for a 50-pair cable assumed by <u>HM 5.3 Revised</u> is about twice that of a 200-pair cable and about three times that of a 400-pair cable. Deleted: HM 5.3 L

	Exhibit TJT-6T Docket No. UT-023003
1	pair foot that is twenty percent lower than the corresponding average that VzLoop's
2	cable size mix would produce when Mr. Donovan's cable investment inputs are used.
3 Q.	DO YOU HAVE OTHER OBSERVATIONS REGARDING HOW, HM 5.3 REVISED AND
4	VzLOOP DEPLOY DISTRIBUTION CABLE?

- 5 A. Yes. The total cable lengths produced by the two models can differ substantially from
- 6 wire center to wire center, as shown in Figure 2.

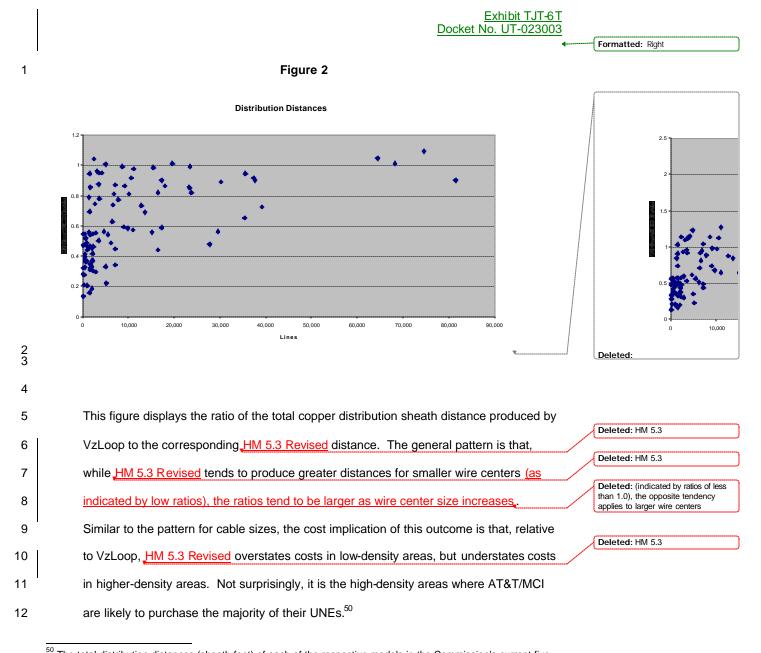

⁵⁰ The total distribution distances (sheath feet) of each of the respective models in the Commission's current five UNE rate zones also demonstrate, <u>HM 5.3 Revised's general tendency for placing relatively greater proportions</u> of facilities in <u>low</u>-density areas. The following table shows these results.

UNE Zone Lines HM Sheath Feet VZ Sheath Feet

Deleted: HM 5.3 Deleted: underestimating Deleted: high

(continued...)



<u>Exhibit TJT-6</u> Docket No. UT-02300		
	4	Formatted: Right
WHY ARE HM 5.3 REVISED'S DISTRIBUTION AREAS SO LARGE?		Deleted: HM 5.3
In response to criticisms levied during the interim phase of the SBC California UNE		
proceeding regarding the underground placement of RTs, Mr. Donovan changed both		

3 proceeding regarding the undergrout Deleted: HM 5.3 4 the design of <u>HM 5.3 Revised</u>'s distribution areas, as well as the available sizes of RTs, 5 to allow for the underground installation of RTs, but only in distribution areas with a 6 sufficient number of lines. However, rather than base the decision to place RTs 7 underground on local conditions (e.g., city ordinances), the sole determinant of 8 underground placement is the size of the cluster -- an RT is only placed underground in 9 a controlled environmental vault ("CEV") when a cluster requires more than 2,100 lines 10 of capacity. The design of the clusters was also changed from earlier versions of the 11 HAI Model (e.g., HM 5.0a) to allow for larger clusters that are able to accommodate Deleted: HM 5.3 12 larger RTs. Specifically, because_HM 5.3 Revised places RTs in underground facilities 13 only when demand exceeds Mr. Donovan's 2,100-line threshold, the high costs of 14 acquiring and installing underground structures are spread over a large number of lines, thereby artificially, and unrealistically, reducing the cost per line of the equipment. This 15 16 stands in sharp contrast to the real world, where the placement of such structures are 17 dictated by factors such as zoning regulations, which are unrelated to the number of Deleted: HM 5.3 18 lines. Contrary to the assumption made in <u>HM 5.3 Revised</u>, in the real network there is

1

2

Q.

Α.

(...continued) 1 286,386 7.385.418 6,774,346 Deleted: 4,359,728 2 268,451 9,226,230 7,613,789 Deleted: 5,878,559 3 102,441 6.368.130 4,654,231 Deleted: 4,889,445 17,426,475 13,065,616 4 197,450 Deleted: 14,496,606 5 209,488 50,267,493 24,978,666 Deleted: 47,058,919

	Exhibit TJT-6T Docket No. UT-023003
1	no guarantee that the high fixed costs of underground structures can be averaged over a
2	large number of lines.
3	The drastic impact of Mr. Donovan's use of CEVs to justify such large distribution
4	areas can be seen in the wide differences in RT sizes used by HM 5.3 Revised (which
5	are based on Mr. Donovan's novel design recommendation) ⁵¹ and the RT sizes used by
6	VzLoop (which are consistent with Verizon NW's well-established engineering practices),
7	as Table 1 demonstrates. VzLoop has over twice the number of RTs (which is
8	consistent with the design of a network with smaller distribution areas). As a result, the
9	average size of an RT in VzLoop is only about one-third of that produced by <u>HM 5.3</u>
10	Revised. Indeed, over 60 percent of the RT capacity in HM 5.3 Revised is accounted for
11	by CEVs – alternatives that were not even considered in earlier versions of the HAI
12	Model. These contrasts illustrate a critical issue in assessing the validity of <u>HM 5.3</u>
13	Revised versus VzLoop: <u>HM 5.3 Revised</u> relies upon a novel and untested "theory" that
14	"bigger is better," whereas VzLoop utilizes a design that reflects proven practices
15	actually employed in designing a real-world network.

⁵¹ See Mr. Murphy's Reply Testimony for a discussion of the departure of Mr. Donovan's RT and DA sizing recommendations from industry-accepted standard sizing guidelines.

Formatted: Right

1 TABLE 1 VzLoop Deleted: HM 5.3 HM 5.3 REVISED Number Capacity Size % of units % of cap Number Capacity % of units % of cap 24 740 17,760 26.8% 1.8% 4,656 17.2% 0.4% 194 48 271 13,008 9.8% 1.3% 96 320 30,720 11.6% 3.0% 22.5% 2.5% 120 254 30,480 Deleted: 22.6% 192 74,112 14.0% 7.3% 386 224 77 17,248 2.8% 1.7% 127 30,480 11.2% 2.5% 240 Deleted: 3 448 333 149,184 12.1% 14.8% 11.9% 672 230 154,560 8.3% 15.3% 218 146,496 19.<u>3</u>% Deleted: 4 896 137 122,752 5.0% 12.2% Deleted: 12.0% 1120 81 90,720 2.9% 9.0% 1344 42 56,448 1.5% 5.6% 145 194,880 12.8% 15.8% Deleted: 9 1568 24 37,632 0.9% 3.7% Deleted: 16.0% 2016 122 245,952 4.4% 24.3% 23 46,368 2.0% 3.8% 2688 30 80,640 2.7% 6.5% Deleted: 29 17 3360 57,120 1.5% 4<u>,6</u>% Deleted: 77,952 4032 6 24,192 0.5% 2.0% Deleted: 6 4704 352,800 28.6% 75 6.6% Deleted: 4 5376 8 43,008 0.7% 3.5% Deleted: 7 0.0% 6048 0 0 0.0% Deleted: 72 6720 31 208,320 2.7% 16.9% Deleted: 338,688 7392 14,784 2 0.2% 1.2% 8064 0 0.0% Deleted: 4 0 0.0% Deleted: 27.8% 2763 1,234,224 1,010,096 1130 Deleted: 8 Average 366 1.092 Deleted: 17.1% 2 Deleted: 1126 Deleted: 1,217,424 3 PLEASE SUMMARIZE YOUR CONCLUSIONS WITH RESPECT TO JHM 5.3 Q. Deleted: 1,081 Deleted: HM 5.3 **REVISED'S MODELING APPROACH.** 4 Deleted: HM 5.3 5 Α. In sum, HM 5.3 Revised's claims of greater efficiency rest on: (1) the untested and 6 debatable proposition that competition would produce more efficient network designs Deleted: HM 5.3 7 than exist today; (2) an assumption that the unverified and highly suspect data_HM 5.3 8 Revised employs is accurate enough to locate key facilities, such as distribution 9 terminals, in a network; and (3) a belief that the abstract rules and erroneous algorithms Deleted: HM 5.3 10 that <u>HM 5.3 Revised</u> employs could produce a realistic representation of a functioning

Exhibit TJT-6T Docket No. UT-023003

		4	Formatted: Right
1		network. With respect to each and every point, AT&T/MCI are mistaken. Ironically,	(
2		despite the fact that <u>HM 5.3 Revised</u> 's proponents tout the Model as being more efficient	Deleted: HM 5.3
3	l	because it is intended to, though in reality does not, produce a more efficient network	
4		design, they often defend the Model on the basis that it produces more facilities than	
5		other models produce and/or are present in the real network (e.g., longer loop lengths). ⁵²	
6		That is, the existing network, which they routinely condemn as inefficient (and out of	
7		compliance with TELRIC rules), is used to justify the alleged realism of <u>HM 5.3 Revised</u> 's	Deleted: HM 5.3
8		hypothetical network. Having failed to establish that <u>HM 5.3 Revised</u> produces a more	Deleted: HM 5.3
9		efficient design, the choice among models would seem to shift to whether a completely	
10		hypothetical approach can be more accurate and reliable than one which is grounded in	
11		measurements of a functioning network. The answer to that question is plainly, no.	
12	Q.	IS VERIZON NW'S APPROACH TO COST MODELING CONSISTENT WITH THE	
13		MODELING APPROACHES APPROVED BY THE FCC AND/OR STATE	
14		REGULATORY COMMISSIONS?	
15	Α.	Yes. The FCC has explicitly approved methodologies like Verizon NW's approach to	
16		cost modeling, which is based on the existing network with appropriate forward-looking	
17		adjustments, and looks to current costs that Verizon NW actually pays for network	
18		components such as switches. The FCC made clear when accepting BellSouth's	

- 19 approach to modeling loop costs:
- 20While BellSouth's loop model was based on a sample of existing21loops, the record demonstrates that loops were redesigned to reflect22forward-looking criteria rather than reproducing the existing network.

⁵² See e.g., Before the California Public Utilities Commission, Application Nos. 01-02-024, et al., Declaration of Brian F. Pitkin in support of Joint Applicants' Rebuttal Comments (March 12, 2003) at p. 49.

- 1Also, the sample assumed that cable routes would follow existing2rights-of-way and roads that BellSouth would use today if it were to3place that cable.⁵³
 - Recent decisions by state regulators have also approved forward-looking cost
- 5 studies that start with measurements of an ILEC's existing network and, in doing so,
- 6 have rejected previous versions of the HAI Model. Thus, as I describe later, not only has
- 7 the regulatory scrutiny Dr. Mercer mentioned⁵⁴ failed to produce widespread acceptance
- 8 of the HAI Model, regulators at the same time have rejected AT&T/MCI's inaccurate
- 9 interpretation of TELRIC as well. For example, in accepting Verizon's cost study and
- 10 rejecting HM 5.2a, the Massachusetts Department of Telecommunications and Energy
- 11 found:

12	Therefore, because Verizon's reliance on existing network
13	architecture as the starting point can lead to reasonable cost results
14	provided that appropriate modifications are made to render the
15	network "more forward-looking," we find that the LCAM is a
16	reasonable tool for modeling UNE loop costs
17 18 19 20 21	We find that Verizon has provided sufficient validation of the data it uses to construct its LCAM model and that, with the appropriate modifications to the assumptions about inputs, the existing network configuration can be used to compute reasonable estimates of forward-looking costs. ⁵⁵

⁵³ BellSouth Order at ¶ 36 (footnotes omitted). In this paragraph, the FCC approved the determination of the Georgia Commission stating: "The Georgia Commission was not hesitant to apply adjustments to BellSouth's cost model to ensure cost-based rates consistent with TELRIC and a forward-looking approach. The evidence shows that the Georgia Commission deliberated over the loop sample methodology and corrected the omission of shorter multi-line business loops. The state commission, however, did not accept AT&T's criticism that BellSouth's loop sample 'improperly adjusted the loop characteristics to be forward-looking." In a footnote, the FCC noted that the adjustments included the forward-looking placement of DLC and fiber facilities, and changes in cable gauges -- adjustments that parallel those used in Verizon NW's cost study. The FCC released the BellSouth Order just two days after the Supreme Court upheld the TELRIC rules. See BellSouth Order at p. ¶ 22. Thus, there can be no doubt that an approach that accounts for the fundamental characteristics of existing networks fully complies with TELRIC.

⁵⁴ Mercer Supplemental Direct Testimony at pp. 6-7.

⁵⁵ Before the Massachusetts Department of Telecommunications and Energy, Docket No. D.T.E. 01-20, Order (July 11, 2002) at pp. 50-51.

	Exhibit TJT-6 T Docket No. UT-023003
1	Similarly, the New Jersey Board of Public Utilities ("New Jersey Board") concluded:
2 3 4 5 6 7 8 9 10 11	We find that the Verizon NJ models are based upon sound engineering principles and sound modeling concepts. While AT&T has demonstrated that similar results may be obtained by varying the inputs and assumptions contained in its model, we find that it is more appropriate to modify the Verizon NJ models to produce forward-looking, TELRIC-compliant results because its basic construction more accurately replicates [Verizon NJ's] network, whereas the HAI Model employs a methodology designed to create a least-cost, most efficient network without regard to realistic design considerations
12 13 14 15 16 17 18 19 20 21	Although in order to determine loop length and structure mix, Verizon NJ takes into consideration characteristics of its outside plant in each UAA, it does not develop its cost estimates based upon embedded costs. In connection with making a decision regarding cost model assumptions for reconstructing the local network, the consideration of the layout and characteristics of the existing network is a reasonable starting point. This is particularly true in light of the fact that customer locations, street locations, central office locations, natural barriers and right-of-way locations will not change significantly. ⁵⁶
22	Likewise, regulators in states such as New York, ⁵⁷ Pennsylvania, ⁵⁸ and Maryland ⁵⁹ have
23	accepted cost studies offered by Verizon, which are similar to the ones that were
24	approved in Massachusetts and New Jersey.
25	Therefore, the first fundamental issue in this case is which approach is more
26	reliable: the Verizon NW approach, which starts with information concerning Verizon
27	NW's current network architecture and makes realistic and appropriate forward-looking
28	adjustments, or the <u>HM 5.3 Revised</u> approach, which attempts to design a brand-new

⁵⁶ Before the New Jersey Board of Public Utilities, Docket No. TO00060356, *Decision and Order* (Mar. 6, 2002) at pp. 27, 30 ("New Jersey Order").

⁵⁷ Before the New York Public Service Commission, Case 98-C-1357, Order on Unbundled Network Element Rates (Jan. 28, 2002).

⁵⁸ Before the Pennsylvania Public Utility Commission, Docket No. R-00016683, *Tentative Order* (Oct. 24, 2002).

⁵⁹ Before the Maryland Public Service Commission, Case No. 8879, Order No. 78552 (June 30, 2003) at p. 17.

<u>Exhibit TJT-6T</u> Docket No. UT-023003

-

Formatted: Right

1		network from the ground up without any regard to real-world operating constraints or	
2		accepted engineering criteria. Without having verified that their cost study produces	
3		accurate results, AT&T/MCI essentially ask the Commission to: (1) trust TNS'	
4		inadequately documented and, in some cases, undisclosed algorithms and processes for	
5		producing clusters; (2) endorse the inaccurate methods of drawing "least cost" routes;	
6		(3) rely on untested formulas to determine the equipment that is needed to provide	
7		service on these routes; and (4) believe that unverified judgments are appropriate	
8		support for the price of that equipment and the labor to install it. In contrast, Verizon	
9		NW's modeling approach starts with information about a network that is the result of	
10		years of growing competition and incentive regulation of some services, and that has	
11		provided telecommunications services to real customers at locations where they are in	
12		fact found. Verizon NW's cost model measures the key characteristics of that real-world	
13		network and captures all the costs necessary to build it and maintain it, many of which	
14		are easy to overlook and/or very difficult (if not impossible) to measure accurately (e.g.,	e d : HM 5.3
15			ed: HM 5.3
16		Revised, Veriz on NW's modeling approach is grounded not in the speculation inherent in	
17	l	an "optimization" algorithm or unverified input recommendations, but in the reality of	
18		experience tested and refined over the years to accommodate the dynamic nature of the	
19		telecommunications industry.	
20	۷.	VALIDATION TESTS	
21		A. INVESTMENT LEVELS, PRICES, AND QUANTITY COMPARISONS	
22	Q.	WHAT CONCLUSIONS CAN BE DRAWN FROM YOUR ATTEMPTS TO VALIDATE	
23		HM 5.3 REVISED?	ed: HM 5.3
	1		

		<u>Exhibit TJT-6T</u> Docket No. UT-023003 ←	Formatted: Right
1	Α.	HM 5.3 Revised significantly underestimates the investments and expenses necessary	Deleted: HM 5.3
2	l	to provide UNEs in Washington. Tables 2A and 2B compare the investments and	Deleted: HM 5.3
3		expenses produced by <u>HM 5.3 Revised</u> with the investments and expenses Verizon NW	
4	l	currently incurs to provide telephone service in Washington. ⁶⁰ The "2003 ARMIS" data in	
5		Tables 2A and 2B are from the outputs used in HM 5.3 Revised's calculations and,	Deleted: HM 5.3
6		according to AT&T/MCI, were taken from Verizon NW's ARMIS reports. Current	
7		investments are calculated by multiplying the ARMIS investment by the current cost-to-	
8		book cost ratio that the FCC used to develop the expense factors, which are	
9		incorporated into <u>HM 5.3 Revised</u> . ⁶¹ The result is an estimate of what it would cost to	Deleted: HM 5.3
10	I	rebuild Verizon NW's current plant, assuming current prices (based on applying current	
	work ARM work in th itself to di cost "USO inclu	documentation for <u>HM 5.3 Revised</u> states that the density-zone Expense Modules "include a USOA Detail scheet that breaks out investment and expense results by Part 32 Account for comparison with embedded IIS data." Mercer Supplemental Direct Testimony at RAM -4 (Model Description), p. 64. However, this scheet (which has appeared in the various versions of the HAI Model from 1998 (5.0a) through 2003 (HM 5.3 e SBC California proceeding)) is not included in the Model's output file. Thus, the Model documentation i offers a relevant "sanity check" comparison, despite the fact that AT&T/MCI and their witnesses have tried stance themselves from this Model output in the past (by insisting that all comparisons to actual network s are irrelevant), and evidently have done away with it altogether in this proceeding. I have included the DA Detail" worksheet here, which accompanied the SBC California version of HM 5.3, and have updated it to ide the investments associated with DS-1 and DS-3 UNEs. I have also reduced the general support	Deleted: HM 5.3
		stments and expenses in the ARMIS and current investment columns to match the proportions assigned to JNEs modeled by <u>HM 5.3 Revised</u> in this proceeding.	Deleted: HM 5.3

2	a
J	J

	Exhibit TJT-6T Docket No. UT-023003	Formatted: Right
1	cost-to-book cost ratios) were paid for assets that were purchased in the past. As	Deleted: HM 5.3
2	described in more detail below, the investments produced by <u>HM 5.3 REVISED</u> are	Deleted: the
3	generally less than 30 percent of Verizon NW's current levels and <u>the</u> expenses for	
4	maintaining the telephone plant are little more than half of current levels.	Deleted: on the order of one-half (or less) Deleted: mostly less than 60 percent

(...continued)

⁶¹ Tenth Report and Order at Appendix D.

Exhibit TJT-6T+---Docket No. UT-023003

Formatted: Right

Deleted: HM 5.3

Table 2A

I

Comparison of <u>HM 5.3 Revised</u> Investments to Verizon NW's Actual Investments

USOA		Expense Description	JHM 5.3	2003 Actual	Current	HM 5.3	HM 5.3	Deleted: HM 5.3HM 5	.3H
			Revised Investment (\$000)	(\$000)	(\$000)	Revised/ 2003	Revised/Curr ent		Ę
		Telecommunications Plant in Service							
2111		Land	\$2,925	\$8,507	\$8,507	34.38%	34.38%		
2112		Motor Vehicles	\$ <u>2,736</u>	\$5,777	\$6,149	<u>47.36</u> %	44.49%	Deleted: 2.504	
2113 <i>-</i> 6		Special Vehicles/Work Equipment	\$ <u>4,806</u>			<u>17.88</u> %			[4]
2121	I	Buildings	\$52.935	\$114,864	\$175,289	46.08%	30.20%	Deleted: \$50,162	C[5]
2122		Furniture	\$1,480	\$3,126	\$4,770	47.36%		Deleted: \$1.355	<u>-</u> ,
2123	İ	Office Equipment	\$2,677	\$5,654	\$8,628	47.36%	31.03%	Deleted: \$2,450	[6]
2124	Î	General Purpose Computers	\$5,937	\$12,538	\$19,133	47.36%	<u>31.03%</u>	Deleted: \$5,433	[8]
2110	İ	Total Land & Support Assets	\$73,497	\$177,341	\$251,080			Deleted: \$69,227	<u> </u>
2212	I	Digital Electronic Switching	\$116,716	\$501,324	\$447,525	23. <u>28</u> %	26. <u>08</u> %	Deleted: \$117,087	[10]
2232	l	Circuit Equipment	\$300,919	\$531,826	\$521,283	<u>56.58</u> %	<u>57.73 %</u>	Deleted: \$291,516	([11]
		Other	\$14,514	\$22,855	\$22,694	63.51%	63.96%		
2411	Í	Poles	\$30.243	\$45,944	\$110,347	65.83%	27.41%	Deleted: \$26,769	
2421	i	Aerial Cable	\$87,774	\$223,853	\$330,823	39.21%	26.53%	Deleted: \$75,280	[12]
2422	İ	Underground Cable	\$47,692	\$303,497	\$453,656	-		Deleted: \$46,797	[13]
2423		Buried Cable	<u>\$169,547</u>	· · · · · · · · · · · · · · · · · · ·	· · · · · ·				[[14]
2441		Conduit Systems	<u>\$55,146</u>					Deleted: \$146,957	([15]
2410		Total Cable & Wire Facilities	\$390,403	\$1,155,895	\$1,719,929	<u>33.77%</u>	22.28%	Deleted: \$50,311	([16]
240		Total TPIS (before amortizable assets)	* • • • • - •	Aa a a a a a a	AA AAA A A A A A A			Deleted: \$346,114	C[17]
240			<u>\$896,050</u>	\$2,389,241	\$2,995,096	<u>37.50</u> %	<u>29.92</u> %	Deleted: \$838,459	[18]

Exhibit TJT-6T Docket No. UT-023003

Deleted: Exhibit No. ___ (TJT-1T) ¶ Docket No. UT-023003¶

Formatted: Left

Table 2B

1
2
3
4

5 6

	Comparison of <u>HM 5.3 Rev</u>	penses				Deleted: HM 5.3
JSOA	Expense Description	<u>HM 5.3</u>	2002 Actua	al <u>JHM 5.3 Revised</u> /Actual		Deleted: HM 5.3
		Revised				Deleted: HM 5.3
		Expenses (\$000)				Deleted: 441
		(\$000)	(\$000)		/	Deleted: 114.76
	Plant Specific Expenses				- //	Deleted: 157
						Deleted: 43.34
6112	Motor Vehicles	\$ <u>482</u>	\$384	<u>125.40</u> %		Deleted: \$71
6113-6	Special Vehicles/Equipment	\$ <u>171</u>	\$362	<u>47.36</u> %	_/ /	,
6121	Buildings	\$1,838	\$8,489	21.65%		Deleted: 52.56%
6122	Furniture	<u>\$78</u>	\$136	57.43%	_//	Deleted: \$290
6123	Office Equipment	<u>\$316</u>	\$551	<u>57.43%</u>		Deleted: 52.56%
6124	General Purpose Computers	\$5,42 <u>9</u>	\$9,453	57.43% <u></u>		Deleted: \$4,968
		ΨΟ,ΤΖΟ	ψ0,τ00	01110/0		Deleted: 52.56%
6110	Total Land & Support Assets	<u>\$8,314</u>	\$19,375	<u>42.91%</u>		- Deleted: \$7,764
						Deleted: 40.08%
6212	Digital Electronic Switching	\$6, 513	\$11,570	56.29%		Deleted: 533
						Deleted: 47
6232	Circuit Equipment	\$ 6,018	\$7,590	<u>79.28</u> %		Deleted: 5,830
0202		4 <u>01010</u>	<i></i>		\sim	Deleted: 76.81
						Deleted: \$593
6411	Poles	<u>\$669</u>	\$2,175	<u>30.77%</u>		Deleted: 27.27%
6421	Aerial Cable	\$4,565	\$6,425	71.05%		Deleted: \$3,761
6422	Underground Cable	¢045	¢4 550	F 4 440/		Deleted: 58.54%
6423	Buried Cable	<u>\$845</u> \$5,930	\$1,553 \$11,757	<u>54.41%</u> <u>50.44%</u>		
0420	Builed Gable	<u>40,000</u>	ψ11,707	<u>50.447</u>		Deleted: \$826
6441	Conduit Systems	\$ 161	\$251	_64.11%		Deleted: 53.16%
6410	Total Cable & Wire Facilities	\$12,170	\$22,161	<u>54.92</u> %		Deleted: \$4,935
		5			///	Deleted: 41.97%
	Total Plant Specific Expenses	\$33,105	\$60,696	54.39 %	//	Deleted: 134
					_///	Deleted: 53.27
						Deleted: 10,248
6561	Depreciation TPIS	\$ 54,525	\$173,195	<u>31.48</u> %		Deleted: 46.24
		₩ <u></u>	ψ175,135	/0		Deleted: 30,376
						Deleted: 50.05
						Deleted: 51,453
	Total Non-Plant (Network Operations	,				Deleted: 29.71
	Customer Services, and Corporate	• of 100	M 440.004	00.000		Deleted: 0
	Operations)	\$ 35,126 \$ 68,141	\$119,891 \$180,587	29.30% 37.73%		
	Total Operating Expenses (Less Depreciation)	<u>400,141</u>	φ100,307	<u>91.13</u> /0		Deleted: 33,178
	Deprovidiony				- //	Deleted: 27.67
						Deleted: 63,553
						Deleted: 35.19

Formatted: Left

1 Q. PLEASE DESCRIBE THE RATIONALE FOR YOUR VARIOUS VALIDATION

2 **TESTS.**

3 Α. A proper benchmark for any cost model that purports to measure a carrier's 4 forward-looking cos ts is whether the model depicts enough equipment and 5 includes accurate prices for that equipment. Similarly, there must be a 6 sufficient amount of ongoing expenses to pay for the labor force needed to run 7 a complex network and cover the ongoing charges for materials that a carrier 8 routinely incurs. Because a cost model should realistically depict existing (or 9 planned) locations of switches and outside plant facilities and, consistent with 10 the FCC's TELRIC principles, the prices ILECs actually pay for their inputs, 11 unusually large deviations between the cost model and reality almost certainly 12 imply inaccuracies in the former, not inefficiencies in the latter. At a minimum, it 13 would seem imperative that a cost model's sponsors justify with specificity why 14 substantially fewer resources are needed and/or why facilities can be acquired, 15 or services can be delivered, at prices far below what a real-world carrier currently pays.62 16

New Jersey Order at pp. 25-26 (internal citations omitted).

⁶² As discussed in greater detail below, the New Jersey Board rejected HM 5.2a. Its primary concern was the Model's large understatement of investment and expenses:

Chief among our concerns is a fact pointed out by Verizon NJ that revealed that the HAI model assumes that Verizon's entire network could be constructed for less than onethird of Verizon NJ's existing investment and that it could be operated for approximately one-fifth of Verizon NJ's current operating expenses. Although we recognize that forward-looking investment and operating costs are likely to be less than embedded or current costs, the substantial nature of the difference between the HAI cost estimates and Verizon NJ's actual experience is indeed dramatic and suggests to the Board that the HAI Model may potentially understate forward-looking costs.

	Docket No. UT-023003	Docket No. UT-023003¶
	4	Formatted: Left
1	A useful analogy is the following: suppose a customer came to Verizon	
2	NW with a request for a 75 percent discount on a large number of loops.	
3	Assume also that this customer knew of a firm that had claimed to have a	Deleted: HM 5.3
4	considerably more efficient way to design loops (as HM 5.3 Revised claims)	Deleted. Third.5
5	and could get the necessary materials very cheaply (e.g., at the unrealistically	
6	low prices advocated by AT&T/MCI). A real-world carrier like Verizon NW	
7	would only accept such a discount if the firm that advertised the more efficient	
8	way to design loops agreed to pay any cost difference should the design	
9	understate the amount of material required or otherwise be unable to offer the	
10	favorable advertised prices.	Deleted: HM 5.3
11	HM 5.3 Revised would fail this simple sanity check. In general, the	Deleted: HM 5.5
12	Model produces investment levels that are less than 30 percent of Verizon	Deleted: 5
13	NW's total current investment (and about 38 percent of Verizon NW's ARMIS	
14	investments), and expenses for operating the network that are less than 40	Deleted: about one-third
15	percent of Verizon NW's current levels. For example, despite the fact that HM	Deleted: HM 5.3
16	5.3 Revised assumes a relatively greater proportion of aerial cable investment	
17	than appears in Verizon NW's network, ⁶³ the Model provides only about,27	Deleted: 40
18	percent of the pole investment that it would take to replace Verizon NW's	
19	current poles at current prices. This can only mean that <u>HM 5.3 Revised</u>	Deleted: HM 5.3
20	provides substantially fewer poles and/or it assumes a pole cost that is much	
21	lower than what is attainable in the real world either way, the Model's results	

I

⁶³ According to Table 2A, <u>29</u> percent of <u>HM 5.3 Revised</u>'s total cable investment is aerial versus 2<u>4</u> Deleted: <u>28</u> percent in Verizon NW's current network. Deleted: HM 5.3

Deleted: 28 Deleted: HM 5.3 Deleted: 5

Exhibit TJT-6T Deleted: Exhibit No. ___ (TJT-1T) ¶

		Exhibit TJT-6T Docket No. UT-023003
		Formatted: Left
1		are highly suspect. ⁶⁴ It is inconceivable that Verizon NW's actual forward-
2		looking costs could be up to 70 percent lower than its current costs.
3	Q.	PLEASE DESCRIBE THE RESULTS ILLUSTRATED BY TABLES 2A AND
4		2B.
5	Α.	Deleted: HM 5.3 Table 2A compares Verizon NW's actual capital investment to HM 5.3
6		Revised's estimated capital investment. Table 2A shows that, HM 5.3 Revised
7		produces less than 30 percent of Verizon NW's current investment in network
8		components. In fact, after applying the current cost-to-book cost ratios to
9		estimate reproduction costs, <u>HM 5.3 Revised</u> produces relatively more
10		investment in electronic switching (26 percent) than cable and wire facilities (22
11		percent). Similarly, HM 5.3 Revised produces a mere 29 percent of Verizon Deleted: HM 5.3 Deleted: 28
12		NW's current support investment (for vehicles, office equipment, and the like). ⁶⁵
13		The investment comparison also shows a noticeable shift away from
14		underground cable, which is generally the most expensive type of cable to
15		place and support. Despite the fact that Mr. Donovan started with ARMIS data
16		on Verizon NW's actual deployment of the various types of cable, ⁶⁶ , <u>HM 5.3</u>
17		Revised's investment in underground cable accounts for only 16 percent of the Deleted: 17

Deleted: HM 5.3

Deleted: HM 5.3

⁶⁴ For example, the Model assumes that Verizon NW pays only about one-third of the cost of a telephone pole, while electric utilities and other carriers paying for the rest. In fact, as Mr. Murphy describes, the Commission-mandated attachment fees are much lower than the level of cost sharing assumed by <u>HM 5.3 Revised</u>'s sharing inputs. Murphy Reply Testimony at Section IV.

⁶⁵ As explained herein, total current support investments and expenses have been reduced by the same percentage that <u>HM 5.3 Revised</u> uses to assign such costs to UNEs (as opposed to retail operations).

⁶⁶ Before the Washington Utilities and Transportation Commission, Docket No. UT -023003, Direct Testimony of John C. Donovan on behalf of AT&T Communications of the Pacific Northwest, Inc. and WorldCom, Inc. and XO Washington, Inc. (June 26, 2003) at p.13.

	Exhibit TJT-6T Docket No. UT-023003 Formatted: Left	T) ¶
1	total cable investment, compared to about 33 percent of Verizon NW's current	
2	investment in cable. ⁶⁷	
3	Turning to the comparison of Verizon NW's actual expenses to HM 5.3	
4	Revised's estimated expenses in Table 2B, ⁶⁸ the Model produces only about 54	
5	percent of Verizon NW's current plant-specific expenses (i.e., the annual	
6	outlays required to maintain and repair the network). The comparison is	
7	particularly revealing for digital switching expenses, where the Model estimates	
8	that Verizon NW can maintain its switches for only 56 percent of the cost it	
9	currently incurs that is, AT&T/MCI assume that Verizon NW can maintain its	
10	current digital switching technology serving the same number of lines with only	
11	about three-fifths of the workforce it now employs. Such an assumption is	
12	simply implausible.	
13	The expenses associated with circuit equipment are also unrealistically	
14	low. Despite an approximate doubling in the proportion of lines that are	
15	assumed to be served by fiber feeder, the Model produces only about <u>79</u>	
16	percent of the expenses that Verizon NW currently incurs.69	
	 ⁶⁷ Mr. Murphy identifies at least three major causes for this phenomenon: the misclassification of certain portions of the modeled feeder plant as though it were distribution plant, the failure of <u>HM 5.3 Revised</u> <u>Deleted: HM 5.3</u> ⁶⁸ Because Verizon NW has only minimal investments and expenses associated with operator services and public telephone, these categories are not included in Table 2B. In addition, including them results in extremely unrealistically expense estimates. For example, <u>HM 5.3 Revised</u> estimates that the expenses associated with operator and public telephone services are over 2.5 times as high as the expenses for cable and wire facilities; when in reality they constitute only three percent of Verizon NW's cable and wire expenses. 	

⁶⁹ ARMIS reports that about 33 percent of Verizon NW's working channelshad a fiber digital loop carrier
 in 2002. ARMIS Report 43-07. In contrast, the proportion of fiberfed loops in <u>HM 5.3 Revised</u> is <u>75</u> percent.

Deleted: HM 5.3 Deleted: 74

		Exhibit TJT-6T Deleted: Exhibit No (TJT-1T Docket No. UT-023003
		Formatted: Left
	Q.	HOW DO HM 5.3 REVISED'S INVESTMENTS COMPARE TO VERIZON NW'S
2		RECENT EXPERIENCE?
5	A.	A comparison of Verizon NW's investment from 1997 to 2003 the time that
ŀ		has elapsed since AT&T/MCI sponsored HAI Model, Release 3.1 in the
5		previous UNE proceeding illustrates the unrealistic investment and expense
6		levels assumed by <u>HM 5.3 Revised</u> . Over those six years, Verizon NW spent
,		about \$976 million on <i>additions</i> to its total plant-in-service. <u>HM 5.3 Revised</u> , on
3		the other hand, calculates somewhat less than that amount of investment
9		\$896 million ⁷⁰ to construct from scratch Verizon NW's entire Washington
)		network. Similarly, for digital switching, while ARMIS data suggest that
I		investment in additions to digital switches totaled about \$165 million between
2		1997 and 2003, HM 5.3 Revised produces only \$117 million to provide entirely
3		new digital switches for all of Verizon NW's lines. ⁷¹
1	Q.	WHY DOES HM 5.3 REVISED PRODUCE SUCH LOW INVESTMENT
		LEVELS?

Economic recovery in the telecommunications space, as it is for the economy as a whole, rests on spurring capital expenditures. We need service providers buying switches and other equipment from the Nortels, Lucents and Ciscos, who are ever more distressed than the service industry. Such companies are innovators, the R&D arms that have kept the network at the cutting edge of the world. They must survive for our future.

Remarks of Michael K. Powell, Chairman, Federal Communications Commission, Goldman Sachs Communicopia XI Conference (Oct. 2, 2002).

(continued...)

¹¹ ARMIS Report 43-02 shows a total investment of about \$280 million for Verizon NW, which is about 59 percent of its lines in Washington. It is highly unlikely that digital switch manufacturers could survive given these dismal investment expectations. And, as FCC Chairman Michael Powell has noted, the health of these vendors is crucial to the economic fortunes of the telecommunications industry:

		<u>Exhibit TJT-6T</u> Docket No. UT-023003	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶
		4	Formatted: Left
1	Α.	There are at least two explanations for the low investment levels produced by	
~			Deleted: HM 5.3
2		HM 5.3 Revised (1) HM 5.3 Revised models insufficient quantities and/or the	Deleted: HM 5.3
3		wrong type of material (e.g., cable and telephone poles) to provide service; and	
4		(2) <u>HM 5.3 Revised</u> 's prices for materials are unrealistically low. For example,	Deleted: HM 5.3
5		suppose the cost of a telephone pole was actually \$600 and Verizon NW	
6		needed 500,000 poles to serve its customers. The required investment would	
7		be \$0.3 billion (\$600 x 500,000). In contrast, if the Model provided only 200,000	
8		poles at a cost of \$400, the associated Model investment would be only \$0.08	
9		billion about 25 percent of the required investment.	
0		In fact, both effects are present, with the price effect being generally	Deleted: HM 5.3
1		larger: HM 5.3 Revised typically produces smaller quantities than what Verizon	Deleted: HM 5.3
2		NW's current investment levels imply, and the materials price inputs used in HM	Polocol 1m 0.0
3		5.3 Revised are considerably lower than what can be inferred from actual	
4		investment levels and available ARMIS plant statistics. The following table	
5		shows the investment necessary to replace Verizon NW's outside plant facilities	Deleted: HM 5.3
6		at current prices as a multiple of <u>HM 5.3 Revised</u> 's investment levels, as well as	
7		the corresponding price and quantity multipliers. ⁷² In terms of the telephone	
8		pole example in the previous paragraph, the investment multiplier would be	

(...continued)

⁷² The estimation of pole prices is straightforward. ARMIS Report 43-08 identifies the equivalent number of poles. Therefore, the investment per pole im plied by 2003 ARMIS investment and the current cost-to-book cost ratio is simply the pole investment in Table 2A divided by the number of poles – a figure that can be compared directly to <u>HM 5.3 Revised</u>'s pole investment input. For cable, I Deleted: HM 5.3 divided investment by sheath distance, which is reported directly in ARMIS, but which has to be calculated by interrupting <u>HM 5.3 Revised</u> at an intermediate point.

	<u>Exhibit TJT-6T</u> Docket No. UT-023003	Deleted: Exhibit No. (TJT-1T) ¶ Docket No. UT-023003¶
		Formatted: Left
1	3.75 (0.3/0.08), the price multiplier 1.5 (600/400), and the quantity multiplier 2.5	
2	(500,000/200,000). ⁷³	
3 4 5	TABLE 3 Verizon NW's Actual Outside	
6 7 8	Plant Investments, Prices, and Quantities as Multiples of <u>HM 5.3 Revised</u> Estimates	Deleted: HM 5.3
	Investment Price Quantity	
	Poles 3.6 3.0 1 ,2	Deleted: 4.1
		Deleted: 4
9	Cable <u>4.5</u> 4.0 1 <u>,1</u>	Deleted: 5.1
0		Deleted: 3
10	As the table shows, the investment required to reconstruct Verizon NW's	
-		Deleted: HM 5.3
11	outside plant facilities is several times higher than what <u>HM 5.3 Revised</u>	
12	produces. For telephone poles, at current prices, Verizon NW would have to	
12	produces. Tor telephone poles, at current prices, venzon new would have to	Deleted: 2.5
13	expend <u>3.6</u> times the investment levels assumed by <u>HM 5.3 Revised</u> , as shown	Deleted: HM 5.3
		Deleted: 68
14	by the ratio of the 110 million current Verizon NW pole investment to the 30	Deleted: 27
15	million produced by <u>HM 5.3 Revised</u> . The discrepancy in investments is further	Deleted: HM 5.3
16	avalained by the fact that the surrent replacement east per pole implied by the	-
16	explained by the fact that the current replacement cost per pole implied by the	Deleted: almost twice
17	FCC's current cost-to-book cost ratio is triple that of HM 5.3 Revised, and that,	Deleted: HM 5.3
		Deleted: HM 5.3
18	despite the fact that <u>HM 5.3 Revised</u> places relatively more aerial cable than	
19	Verizon NW has in its network, there are 20 percent more poles in reality than	Deleted: 4
20	what HM 5.3 Revised produces. ⁷⁴ Perhaps most informative is the comparison	Deleted: HM 5.3
21	of cable investments: JHM 5.3 Revised implies that the same customers could	Deleted: HM 5.3
	V	

⁷⁴ Indeed, simple arithmetic shows that the investment multiple (3.6) equals the product of the price (3.0) and quantity (12) multiples.

-	Deleted: 2.5
4	Deleted: 1.8
Υ	Deleted: 4

⁷³ Note that the investment multiplier equals the price multiplier times the quantity multiplier.

⁴⁹

		Exhibit TJT-6T Docket No. UT-023003	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶
		•	Formatted: Left
	1		Deleted: 0
1		be connected to the same wire centers at a cost of only 22 percent (1/4.5) of	Deleted: 5.1
2	I	what it would cost to replicate Verizon NW's existing plant. Table 3 shows that	
3	I	the estimated quantities in Verizon NW's actual network are about 10-20	Deleted: 3 Deleted: 4
5			Deleted: HM 5.3
4		percent larger than what HM 5.3 Revised produces, and the materials prices	
5		are <u>3</u> to 4 times higher than <u>HM 5.3 Revised</u> 's inputs.	Deleted: 2 Deleted: HM 5.3
6	Q.	BESIDES SERVING AS A BENCHMARK, WHAT ADDITIONAL LIGHT DO	
7		THE INVESTMENT COMPARISONS YOU HAVE JUST SHOWN SHED ON	Deleted: HM 5.3
8		THE APPROPRIATENESS OF USING <u>HM 5.3 REVISED</u> TO ESTIMATE	
9	l	VERIZON NW'S FORWARD-LOOKING COSTS OF PROVIDING UNES?	
			Deleted: HM 5.3
10	А.	As I explain in detail below, because <u>HM 5.3 Revised</u> provides, for example, 27	Deleted: 5
11	I	percent of Verizon NW's current pole investment, the Model automatically	
12	I	reduces the expenses allegedly necessary to maintain them by the	Deleted: a
			Deleted: 40
13		corresponding_percentage. Such an assumption is flawed. Just because	
14	I	AT&T/MCI believe (based on a flawed survey of vendors operating outside	
15		Washington) that poles may be cheaper does not mean that Verizon NW's	
16		expenses to maintain them will be similarly reduced. There is no plausible	
17		explanation for <u>HM 5.3 Revised</u> 's implication that just because a carrier might	Deleted: HM 5.3
18	I	get a good deal on poles, those poles would be cheaper to maintain than poles	
19		purchased at less favorable prices. Both the notion that fewer poles are	Deleted: HM 5.3
20		required (despite the greater prominence of aerial cable in <u>HM 5.3 Revised</u>),	
21	I	and the assumption that maintenance expenses would be automatically	
22		reduced by corresponding amounts, have no merit.	

					<u>Exhibit TJT-6T</u> Docket No. UT-023003	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶
4						Formatted: Left
1	Q.	TABLE 3 INDICATES TH				
2		BY <u>HM 5.3 REVISED</u> ARE	SOMEWHAT	SMALLER	THAN WHAT ARMIS	
3	I	IMPLIES. IS THE SAME	rue for the	DIFFERE	NT TYPES OF CABLE?	
4	Α.	Yes, but the deviations from	n current prices	differ cons	iderably for the different	
5		cable types, as shown in T	able 4.			
6			TABLE 4			
7 8 9		Verizon NW's Prices, and Quantities	Actual Cable F as Multiples of			Deleted: HM 5.3
			Investment	Price	Quantity	
		Aerial	<u>.3.8</u>	3 <u>,7</u>	1, <u>0</u>	Deleted: 4.5
		Buried	3.4	3.2	1 ,1	Deleted: 9
		Underground	9 <mark>,5</mark>	5, <mark>5</mark>	1,7	Deleted: 2 Deleted: 4.0
10	1	<u> </u>	-		<u> </u>	Deleted: 2
11	I	Of particular note here is the	he fact that HM	5 3 Revise	d prices underground	Deleted: 7
•••						Deleted: 4 Deleted: 8
12		cable considerably lower th	nan what Verizo	n NW's cur	rent investments imply. A	Deleted: HM 5.3
13		likely explanation is that, ir	HM 5.3 Revise	d. almost 4	0 percent of the total	Deleted: HM 5.3
						Deleted: about half
14		underground route distanc	e is accounted f	or by the tv	vo lowest density zones	
15		(i.e., areas with line densiti	es less than 100	0 lines per s	square mile). In contrast,	
16		real-world underground fac	cilities tend to be	e concentra	ted in high-density areas.	Deleted: HM 5.3
17		Again, relative to both real	ty and VzLoop,	HM 5.3 Re	vised appears to shift	Deleted: HM 5.3
18		costs away from large, hig	h-density wire c	enters and	towards smaller areas.	
			-			Deleted: HM 5.3
19	Q.	HOW DO <u>HM 5.3 REVISE</u>				
20		COSTS REPORTED BY V	ERIZON NW IN	I THE FCC	'S ARMIS DATA, AND TO	
21		THE COSTS ESTIMATES	PRODUCED B	Y VzCOST	?	

<u>Exhibit TJT-6T</u> Docket No. UT-023003	Deleted: Exhibit No (TJT-1T) Docket No. UT-023003¶
4	Formatted: Left
	Deleted: HM 5.3

A comparison of JHM 5.3 Revised's monthly loop costs to Verizon NW's 2003 1 Α.

actual loop costs (as described in Mr. Dye's testimony),⁷⁵ and to VzCost's 2

3 monthly loop costs, as shown in Table 5 below.

TABLE 5

I	JHM 5.3	Investment	Monthly Capital Costs	Monthly Network Expenses	Other Expenses	Network + Other Expenses	Total Monthly Cost	Deleted: HM 5.3
	Revised	<u>\$447.84</u>	\$ <u>4.89</u>	\$ <u>1.14</u>	\$ <u>2.47</u>	\$ <u>3.61</u>	\$ <u>8.50</u>	Deleted: 4.43
	VzCost	\$1,114.84	\$21.78	\$6.30	\$5.59	\$11.89	\$33.66	Deleted: 2.23
_	2003 Actu	al \$1,148.71	\$12.38			\$15.06	\$27.44	Deleted: 404.44
5							///	Deleted: .98
~		non onto total		anta analhu	a a lua a la una Ala			Deleted: 3.21
6	Table 5	reports total	loop investm	ents, and bro	eaks down th	ne respective	montniy	Deleted: 7.64
7	costs in	to canital cos	te (i o donre	ciation retu	rn and taxes), network ex	nansas	Deleted: 7.04
'	00313 111						0011303	
8	(i.e., pla	ant-specific ex	xpenses othe	r than gener	al support), a	and all other e	xpenses. ⁷⁶	
-	(, [T	gener				Deleted: HM 5.3
9	While	IM 5.3 Revise	ed produces i	nvestments	and monthly	costs that are	Jess than	Deleted: expenses
								Deleted: only 40 percent and 30
10	<u>40</u> perc	ent of Verizo	on NW's actua	al <u>experience</u>	<u>e,</u> VzCost sho	ows investme	nts and	Deleted: about one-third
								Deleted: expenses
11	expense	es that, while	somewhat di	fferent than	actual values	s, are much cl	oser. That	
4.0				141 - 41			(140)	
12	is, VzCo	ost results are	e clearly in lin	e with the pi	reviously stat	ed expectatio	ns of MCI's	
13	agungal	the United 9	Statas Suprar	a Court on		themselves t	hat loop	
15	counsei	, the Onited 3	States Suprer	ne Court, an		inemseives i	nat ioop	
14	facilities	do not exhit	bit the potentia	al for rapid c	ost reduction	like other ne	twork	
••								
15	compor	nents, such as	s switching, a	nd, in fact, n	nay actually i	ncrease on a	going-	

16 forward basis.

4

Deleted: 4.43)
Deleted: 2.23)
Deleted: 404.44	
Deleted: .98	
Deleted: 3.21)
Deleted: 7.64	

Deleted: HM 5.3
Deleted: expenses
Deleted: only 40 percent and 30
Deleted: about one-third
Deleted: expenses

⁷⁵ Before the Washington Utilities and Transportation Commission, Docket No. UT-023003, Reply Testimony of Terry R. Dye on behalf of Verizon Northwest Inc. (April 20, 2004).

⁷⁶ Because Mr. Dye's calculations (which are based on ARMIS data) do not conveniently identify network expenses, only the capital costs and total expenses are shown.

		_Exhibit TJT-6T		Deleted: Exhibit No (TJT-1T) ¶
		Docket No. UT-023003	_	Docket No. UT-023003¶
		₩ ~~		Formatted: Left Deleted: ¶
1	Q.	PLEASE DESCRIBE SOME OF THE OTHER VALIDATION TESTS YOU	<u>_</u>	Jeleteu. I
2		HAVE CONDUCTED.		
3	Α.	Another benchmark is the employment implications of the expenses estimated	G	Deleted: HM 5.3
4		by_HM 5.3 Revised. Table 2B shows that_HM 5.3 Revised produces total		Deleted: HM 5.3
				Deleted: 64
5		operating expenses, less depreciation, of about \$68 million (\$33 million for	<u> </u>	Deleted: 30
6		plant-specific and \$35 million for network operations, customer services, and		Deleted: 33
7		corporate operations). These expenses would consist of compensation for the	G	Deleted: HM 5.3
8		employees operating the network modeled by <u>HM 5.3 Revised</u> and payments		Jeleted: HWI 5.5
0				Deleted: HM 5.3
9		for "out-of-pocket" materials. In <u>HM 5.3 Revised</u> , these expenses apply to		
10		wholesale operations captured in recurring charges only (i.e., they must be	G	
11		attributable to UNEs). In particular, HM 5.3 Revised's assumptions imply that		Deleted: HM 5.3
12		48 percent of total expenses are considered wholesale.	G	Deleted: HM 5.3
13		To estimate the number of employees needed to operate,HM 5.3	~	
14		Revised's network, 2003 ARMIS dat a for Verizon NW show that: (1)		
15		compensation accounted for about 26 percent of operating expenses, less		
16		depreciation; and (2) the average compensation per employee was about		
17		\$71,000 per year. Therefore, the estimated cost of labor compensation implied	ſī	Deleted: HM 5.3
18		by <u>HM 5.3 Revised</u> is (\$68 million x 0.26 =) \$17.7 million, and the implied	/~	Deleted: 3
19		number of employees would be (\$ <u>17.7</u> million labor compensation/\$71,000 per	<u> </u>	Deleted: 6.8
19				Deleted: 16.8
20		employee =) <mark>250</mark> employees.		Jeleted: 240
21		In contrast, because Table 2B shows Verizon NW incurred 2.6 times the	$\sum_{i=1}^{n}$	Deleted: almost three
22		out-of-pocket expenses as HM 5.3 Revised produces, Verizon NW had a labor	$\sum_{i=1}^{n}$	Deleted: HM 5.3
23		force providing wholesale functions that was about 2.6 times that implied by HM	/ \m	Deleted: three Deleted: HM 5.3
20			<u> </u>	

		Exhibit TJT-6TDeleted: Exhibit No (TJT-1T) ¶Docket No. UT-023003Docket No. UT-023003¶
		Formatted: Left
	I	Deleted: 7
1		5.3 Revised, or about 650 employees in 2003 in Washington. ⁷⁷ That is, HM 5.3 Deleted: HM 5.3
2		Revised's results are equivalent to a claim that an "efficient carrier" could run its
3		wholesale operations (i.e., produce the same volumes of network elements that
4		Verizon NW provides to itself and to CLECs today) with only about a little more
5		than one-third of Verizon NW's current labor force.
6	Q.	PLEASE SUMMARIZE YOUR CONCLUSIONS WITH RESPECT TO THE
7		AFOREMENTIONED VALIDATION TESTS.
8	Α.	As shown in the summary table below, acceptance of the investment and
9		expense levels produced by <u>HM 5.3 Revised</u> requires a belief that Verizon NW:
10		(1) could produce the same volumes of UNEs (e.g., loops and switching) with Deleted: 838
11		total network investment (\$896 million) that is less than the amount Verizon NW
12		spent in six years (from 1997 to 2003) just for capital <i>additions</i> to its current
13		network (\$976 million); and (2) would incur only about 37 percent of the total Deleted: 5
14		wholesale operating expenses and employ only about 37 percent of the
15		employees that Verizon NW needed to operate its real-world network in 2002.
16		This stark difference between the hypothetical blank-slate theory of <u>HM 5.3</u>
17		Revised and the reality of Verizon NW's operations demonstrates that <u>HM 5.3</u>
18		Revised models an entirely unrealistic network and produces substantially
19		underst ated cost estimates; it in no way implies that the latter is an inefficient
20		carrier.

⁷⁷ ARMIS Report 43-02 stated that there were about 2,500 employees for Verizon NW in 2003 (including its operations outside of Washington). Some of the efforts of these employees are for non-regulated, retailing, and non-recurring activities, the associated expenses for which I have estimated and removed from Verizon NW's actual figures.

					Ex Docket No.	<u>khibit TJT-6</u> . UT-02300	Docket No. UT-023003
I							Formatted: Left
1			TABLE	6			
			HM 5.3 Revised				Deleted: HM 5.3
		Investment	\$ <u>986</u> million		on additions (1	998-	Deleted: 838
I		Expenses	\$68 million	2003) \$181 millio	on		Deleted: 63
I		Less	·				
1		Depreciation "Wholesale"	250	650			Deleted: 240
		Employees	<u>,250</u>	<u>650</u>			Deleted: 240
2				I		I	
3		B. CONSISTENCY				OTHESES	
5		B. CONDICTENCT					Deleted: HM 5.3
4	Q.	HOW DO THE COST	ESTIMATES PR	ODUCED BY	HM 5.3 REVIS	<u>ED</u>	
5		COMPARE TO THE	RESUL TS OF PR	EVIOUS RELI	EASES OF TH	IE HAI	
6		MODEL?					
_ 1							Deleted: HM 5.3
7	Α.	Testing HM 5.3 Revis	sed's results again	st general exp	ectations and/	or	
8		hypotheses implicit in	previous releases	s of the HAI M	odel provides y	et another/	
9		validation test, which	further demonstra	tes the absurd	lity of the cost	estimates	
10		advocated by AT&T/	MCI. As noted ear	lier, MCI previ	ously noted be	fore the	
11		United States Supren	ne Court that the c	costs of networ	k elements no	t involving	
12		computer component	s, such as the loop	o, are not decr	easing (and m	ay even be)
13		increasing).78 In dire	ct contrast, the pe	r-line loop cost	s advocated b	y AT&T/M	CI
14		in several Was hingto	n UNE proceeding	is have drama	tically dropped	, as shown	
15		in the following table.					
16			TABLE	7			
		Invest	tment Monthly	Network	Other	Total	l
		invest	woning	Network	Uner	Total	

Investment	Monthly Capital	Network Expenses	Other Expenses	
------------	--------------------	---------------------	-------------------	--

⁷⁸ Supreme Court Argument at pp. 74-75.

Exhibit TJT-6T Docket No. UT-023003 Deleted: Exhibit No. ___ (TJT-1T) ¶ Docket No. UT-023003¶

Formatted: Left

Deleted: HM 5.3 Deleted: 404.44

HM 3.1	\$705.09	\$8.87	\$1.28	\$4.44	\$14.58	
HM 5.0a	\$614.93	\$7.74	\$1.13	\$3.75	\$12.62	
<u>,HM 5.3</u>	\$447.84	\$ 4.89	\$ <u>1.14</u>	\$ <u>2.47</u>	\$ <u>8.50</u>	
Revised						

	Neviseu	Deleteu. 404.44
1		Deleted: 4.43
0		Deleted: 0.98
2	Table 7 lists loop investment, annual capital costs, network expenses (plant-	Deleted: 2.23
3	specific expenses other than general support), and other expenses (general	Deleted: 7.64
Ū.		
4	support, network operations, and corporate overheads). The table shows a	
5	reduction of about 42 percent (over seven years) in the cost per loop relative to \sim	Deleted: 48
5		
6	HM 3.1. AT&T/MCI's changing loop price recommendations translate into	
- 1		Deleted: 8.8
7	annual rates of decline of about 7.4 percent, which, as I described earlier and	
8	as MCI's counsel explained to the United States Supreme Court, simply cannot	
9	be explained by any technological developments in loop technology.	
10 Q.	WHY HAS THERE BEEN SUCH A DRASTIC REDUCTION IN LOOP COSTS	
		Deleted: HM 5.3
11	BETWEEN <u>HM 5.3 REVISED</u> AND PREVIOUS VERSIONS OF THE HAI	Deleted: HM 5.3
		Deleted: HM 5.3
11 12	BETWEEN <u>HM 5.3 REVISED</u> AND PREVIOUS VERSIONS OF THE HAI MODEL?	Deleted: HM 5.3
12	MODEL?	Deleted: HM 5.3
		Deleted: HM 5.3
12 13 A .	MODEL? The overall reductions in loop costs (shown in Table 7) reflect changes to both	Deleted: HM 5.3
12	MODEL?	Deleted: HM 5.3
12 13 A .	MODEL? The overall reductions in loop costs (shown in Table 7) reflect changes to both	Deleted: HM 5.3
12 13 A. 14 15	MODEL? The overall reductions in loop costs (shown in Table 7) reflect changes to both the inputs and the Model itself. In fact, when I used inputs from the previous versions of the HAI Model in the SBC California version of HM 5.3 (a daunting	Deleted: HM 5.3
12 13 A. 14	MODEL? The overall reductions in loop costs (shown in Table 7) reflect changes to both the inputs and the Model itself. In fact, when I used inputs from the previous	Deleted: HM 5.3
12 13 A. 14 15	MODEL? The overall reductions in loop costs (shown in Table 7) reflect changes to both the inputs and the Model itself. In fact, when I used inputs from the previous versions of the HAI Model in the SBC California version of HM 5.3 (a daunting	Deleted: HM 5.3
12 13 A . 14 15 16 17	MODEL? The overall reductions in loop costs (shown in Table 7) reflect changes to both the inputs and the Model itself. In fact, when I used inputs from the previous versions of the HAI Model in the SBC California version of HM 5.3 (a daunting task that was probably only an approximation because of the differences in the number, definitions, and formats of the inputs), ⁷⁹ HM 5.3 produced somewhat	Deleted: HM 5.3
12 13 A . 14 15 16	MODEL? The overall reductions in loop costs (shown in Table 7) reflect changes to both the inputs and the Model itself. In fact, when I used inputs from the previous versions of the HAI Model in the SBC California version of HM 5.3 (a daunting task that was probably only an approximation because of the differences in the	
12 13 A . 14 15 16 17 18	MODEL? The overall reductions in loop costs (shown in Table 7) reflect changes to both the inputs and the Model itself. In fact, when I used inputs from the previous versions of the HAI Model in the SBC California version of HM 5.3 (a daunting task that was probably only an approximation because of the differences in the number, definitions, and formats of the inputs), ⁷⁹ HM 5.3 produced somewhat higher investments than the earlier versions, suggesting that, while, HM 5.3	
12 13 A . 14 15 16 17	MODEL? The overall reductions in loop costs (shown in Table 7) reflect changes to both the inputs and the Model itself. In fact, when I used inputs from the previous versions of the HAI Model in the SBC California version of HM 5.3 (a daunting task that was probably only an approximation because of the differences in the number, definitions, and formats of the inputs), ⁷⁹ HM 5.3 produced somewhat	

 ⁷⁹ Before the California Public Utilities Commission, Application Nos. 01-02-024 et al., *Reply Declaration of Timothy J. Tardiff filed on behalf of SBC California* (Feb. 7, 2003) at pp. 34-35.

	Ext	nibit	TJ	<u>T-6T</u>
)ocket	No	UT-	023	1003

Deleted: Exhibit No. ___ (TJT-1T) ¶ Docket No. UT-023003¶

Formatted: Left

1 associated therewith has been more than offset by equipment pri	ice reductions,
---	-----------------

2 such as Mr. Donovan's very understated cable price recommendations.

3 Indeed, when HM 3.1's cable costs are used in HM 5.3 Revised, the investment

- 4 per line increases to \$734 (compared to the \$448 and \$705 for HM 5.3 Revised
- 5 and HM 3.1 shown above), and when HM 5.0a's cable costs are used with <u>HM</u>
- 6 <u>5.3 Revised</u>, the investment per line increases to \$653 (compared to the \$448
- 7 and \$615 for <u>HM 5.3 Revised</u> and HM 5.0a shown above). That is, Mr.
- 8 Donovan's changing engineering and installation labor estimates <u>looms large in</u>

9 explaining the changes in costs between successive versions of the HAI Model.

10Q.IN PARTICULAR, WHY DO HM 5.3 REVISED'S REDUCTIONS IN LOOP11COSTS DEFY COMMON SENSE?

- 12 A. As AT&T/MCI have recognized in other contexts, labor accounts for substantial
- 13 amounts of the investment in loop facilities; and labor costs are not

18

- 14 decreasing.⁸⁰ Another major component of loop plant -- copper cable -- has
- 15 experienced recent price increases as well. The average monthly price of
- 16 copper increased from \$0.76 to \$1.34 between March 2003 and March 2004.⁸¹

17 Indeed, when the FCC developed the expense factors used by HM 5.3 Revised,

it increasedbook investments for loop investment categories when it estimated

7	Deleted: HM 5.3
λ	Deleted: 6
4	Deleted: 447
1	Deleted: 404
Ν	Deleted: HM 5.3
4	Deleted: HM 5.3
	Deleted: 572
Η	Deleted: 447
Ν	Deleted: 404
Η	Deleted: HM 5.3
	Deleted: a large portion of the change in costs between successive versions of the HAI Model appear to be the result of
_	Deleted: HM 5.3

Deleted: HM 5.3

⁸⁰... [t]here is no reason why economic depreciation need conform to a pattern by which loss in plant value is most severe early and trails off late. While certain pieces of electronic telecommunications equipment (e.g., digital circuit equipment) may display such a characteristic, other pieces (e.g., copper or fiber cable, conduit systems) may not. Because of increases in engineering costs over time, such equipment may enjoy economic appreciation effects that attenuate any loss in value due to physical wear and tear.

Before the Federal Communications Commission, WC Docket No. 03-173, *Declaration of John C. Klick* (Dec. 16, 2003) at ¶ 107 ("FCC Klick Decl.").

		Exhibit TJT-6T Docket No. UT-023003	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT 023003¶ Formatted: Left
1		the cost of current loop plant, as my results in Table 2A illustrate. If loops cost	
2		were decreasing, one would expect to see the current cost lower than the book	
3		cost, as illustrated by digital switching.	
4	Q.	IS THERE ANY HISTORICAL PRECEDENT FOR THE HUGE COST	
5		REDUCTIONS HM 5.3 REVISED IMPLIES?	Deleted: HM 5.3
6	Α.	No. In an attempt to demonstrate that such huge differences between the cost	Delete de UNA 5.0
7		estimates produced by HM 5.3 Revised and Verizon's actual costs are	Deleted: HM 5.3
8		reasonable, AT&T/MCI have cited to the railroad industry and interstate long-	
9		distances prices to support their contention that <u>HM 5.3 Revised</u> 's implied	Deleted: HM 5.3
10		reductions to ILEC costs are not unreasonable. ⁸² However, rather than support	
11		the putative cost reductions that HM 5.3 Revised claims are feasible, the	Deleted: HM 5.3
12		railroad experience undermines such a claim. Indeed, those statistics show	
13		that railroads reduced their real (inflation adjusted) costs (as measured by total	
14		expenses per output) over a twenty-year period by less than what AT&T/MCI	
15		claim could happen overnight for Verizon NW. In addition, Mr. Klick's	
16		comparison with the railroad industry is not germane for two additional reasons.	
17		First, it is likely that much of the improved performance for railroads was the	
18		result of their shedding much of their (presumably unprofitable) network, a	
19		luxury not available to ILECs such as Verizon NW. Second, while the railroad	
20		gains reflect the full effect of deregulation, the potential for comparable gains in	
	(stinued	

(...continued)

⁸¹ In 1997 (when AT&T/MCI offered HM 3.1 to this Commission), the copper price was about \$1.07. The ups and downs in copper prices since then indicate that there is no reason to expect this component of loop costs will decline..

<u>"E</u>)	<u>khibit TJT-6T</u>
Docket No	. UT-023003

Deleted: Exhibit No. ____ (TJT-1T) ¶
Docket No. UT-023003¶

			•{	Formatted: Left	
1		telecommunications is much less because of the long history of price cap			
2		regulation, and the fact that ILECs have been subject to increasing amounts of			
3		competition over the years. Both effects indicate that Verizon NW is already			
4		operating at reasonably efficient levels; and thus, immediate 70-percent cost			
5		reductions are totally unrealistic. Similarly, Mr. Klick reports that real long-			
6		distance prices decreased by 23 to 41 percent after deregulation. However, a			
7		substantial proportion of this reduction is attributable to the FCC's			
8		contemporaneous reduction in access charges. When this effect is removed,			
9		the resulting reduction in real long-distance prices (net of access changes) was			
10		actually smaller than the real reduction in local telephone prices (net of			
11		subscriber line charges). ⁸³	ſ	Deleted: UN 5.2	
12		C. THE FCC'S SYNTHESIS MODEL DOES NOT VALIDATE HM 5.3	\square	Deleted: HM 5.3	
13		REVISED			
14	Q.	HOW DO THE RESULTS OF THE FCC'S SYNTHESIS MODEL COMPARE	٨	Deleted: HM 5.3	
15		TO THOSE OF HM 5.3 REVISED?			
10					
16	Α.	Dr. Bryant describes some purported similarities between the FCC's Synthesis	1	Deleted: HM 5.3	
17		Model and <u>HM 5.3 Revised</u> in an apparent attempt to lend credibility to the	/`	<	
18	ļ	latter. ⁸⁴ In actuality, however, the Synthesis Model produces substantially			
	<u> </u>				

(...continued)

⁸³ Before the Federal Communications Commission, WC Docket 03-137, Declaration of Howard Shelanski and Timothy Tardiff on the review of rules for pricing unbundled network elements, prepared for filing with the Federal Communications Commission on behalf of Verizon, (Jan. 30, 2004) at ¶ 14.

⁸⁴ Bryant Direct Testimony at pp. 16-17.

⁸² See, e.g., FCC Klick Decl. at ¶¶ 111-15.

		Exhibit TJT-6T Docket No. UT-023003	
		Formatted: Left	
1		higher loop costs (close to \$19 per month and \$876 investment per loop) when	
2		it is applied in a manner similar to that developed by the FCC for use in Section	
3		271 proceedings. ⁸⁵	
4		Equally important, as MCI's counsel explained to the United States	
5		Supreme Court:	
6 7 8 9		The investment [from the Synthesis Model] is too low. And the FCC specifically said it was too low…because it's designed to calculate universal service subsidies at the very most basic low level. ⁸⁶	
10		Consequently, any "fixes" developed for the FCC Synthesis Model's low	
11		investment problem would only widen the gap between the UNE cost estimates	
12		produced thereby and those calculated by <u>HM 5.3 Revised</u> . Contrary to Dr.	
13		Bryant's assertions, rather than validate, HM 5.3 Revised, the FCC Synthesis	
14		Model confirms how incredibly understated the former's cost estimates truly are.	
15	VI.	MAJOR CHANGES IN OUTSIDE PLANT LABOR REQUIREMENTS	
16	Q.	WHAT CHANGES, IF ANY, HAVE BEEN MADE TO HM 5.3 REVISED'S	
17		MATERIAL PRICE INPUTS?	
18	Α.	The bulk of the material price inputs are presented in Mr. Donovan's testimony.	
19		While Mr. Murphy evaluates them from an engineering perspective, I focus on	
20		the labor requirement implications of the changes to these inputs. Apart from	
21		the inputs for cable investment, digital loop carrier ("DLC") line cards, and	
22		CEVs, Mr. Donovan presents the many materials prices that have not changed	
	⁸⁵ In p	particular, I used the FCC's default inputs for pct_1 sa and pct_DS -1 that assume two copper pairs	

⁸⁵ In particular, I used the FCC's default inputs for pct_1 sa and pct_DS -1 that assume two copper pairs per DS -1 service to make a comparable adjustment to the number of business and special access lines.

⁸⁶ Supreme Court Argument at p. 74.

		Exhibit TJT-6T Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003 Docket No. UT-023003 Formatted: Left
1		among the various releases of the HAI Model. Since one would expect that
2		general inflation in labor and materials would increase outside plant materials
3		prices, by maintaining the same prices AT&T/MCI are able to produce
4		significantly understated cost estimates. Indeed, for the investments in loop
5		plant produced by <u>HM 5.3 Revised</u> , cable accounts for about <u>30</u> percent, DLC Deleted: HM 5.3 Deleted: 27
6		equipment for about 27 percent, and the materials for which Mr. Donovan
7		maintained previous inputs (support structures, terminals, drops, NIDs, and
8	I	SAIs) for 43 percent of the total loop investment.
9	Q.	Deleted: HM 5.3
10		REVISED'S CABLE INVESTMENT INPUTS.
11	Α.	With regard to Mr. Donovan's new inputs for cable, he has replaced input prices
12		that combined materials, engineering, and labor with separate materials prices
13		(which he describes as coming from a Florida decision) and separate estimates
14		of the labor necessary to engineer and install cable. As shown in Table 8
15		below, Mr. Donovan has assigned substantially less cost to labor in <u>HM 5.3</u>
16		Revised than he recommended in previous versions of the HAI Model. For
17		cable sizes larger than 200 pairs, there is an even larger reduction relative to
18		the cable labor assumed in HM 3.1. The following table presents the
19		comparison for copper cable. ⁸⁷

⁸⁷ The <u>HM 5.3 Revised</u> installed cable prices can be produced by interrupting an <u>HM 5.3 Revised</u> run at the point the distribution module is fully populated. The labor component is the difference between these total prices and the materials prices presented in Mr. Donovan's testimony. The labor 1 Deleted: HM 5.3 Deleted: HM 5.3 components differ by type of placement. In order to facilitate a comparison with the HM 5.0a and HM 3.1 inputs (which do not differ by type of placement), I weighted them by the proportion of cable investment produced by HM 5.3 Revised for each type: 41.9 percent aerial, 51.5 percent buried, and I Deleted: HM 5.3 (continued...)

Exhibit TJT-6T Docket No. UT-023003

Deleted: Exhibit No. (TJT-1T) ¶ Docket No. UT-023003¶

Formatted: Left

TABLE 8

			<u>,HM 5.3</u>	% reduction between 5.0a and	% reduction between 3.1 and	_	Deleted: HM 5.3	
Size	HM 5.0a	HM 3.1	Revised	5.3	5.3	(
4200	\$8.12	\$44.55	<u>\$1.26</u>	<u>84.5%</u>	97.2%		Deleted: \$1.28	[
3600	\$8.06	\$38.25	\$1.13	86.0%	97.1%		Deleted: \$1.15	 ^
3000	\$8.00	\$31.95	\$0.99	87.6%	96.9%		Deleted: \$1.01	
2400	\$7.94	\$25.65	\$0.86	<u>89.1%</u>	96.6%	ç	Deleted: \$0.88	<u>_</u>
1800	\$6.88	\$19.35	\$0.73	<u>89.4%</u>	96.2%		Deleted: \$0.75	
1200	\$5.82	\$13.05	<u>\$0.60</u>	<u>89.7%</u>	<u>95.4%</u>			
900	\$5.29	\$9.90	\$0.54	<u>89.9%</u>	94.6%		Deleted: \$0.61	(
600	\$4.51	\$6.75	\$0.47	89.6%	93.0%		Deleted: \$0.54	
400	\$3.74	\$4.65	\$0.43	88.6%	90.8%		Deleted: \$0.48	(
200	\$2.55	\$2.55	\$0.38	<u>85.0%</u>	85.0%		Deleted: \$0.43	(
100	\$1.50	\$1.50	\$0.36	76.0%	76.0%		Deleted: \$0.39	ſ
50	\$0.98	\$0.98	<u>\$0.35</u>	<u>64.3%</u>	<u>64.1%</u>		Deleted: \$0.37	 ר
25	\$0.71	\$0.71	\$0.34	<u>51.5%</u>	51.8%		Deleted: \$0.35	ـــــــــــــــــــــــــــــــــــــ
12	\$0.58	\$0.58	<u>\$0.34</u>	<u>41.1%</u>	<u>41.1%</u>		Deleted: \$0.35	
6	\$0.51	\$0.51	<u>\$0.34</u>	<u>33.3%</u>	33.3%			L
							Deleted: \$0.35	(
						7	Deleted: \$0.34	C

HAVE YOU ATTEMPTED TO VALIDATE MR. DONOVAN'S PROPOSED Q. 4

5 CABLE LABOR INPUTS IN ANY OTHER WAY?

- 6 Α. Yes. Another benchmark for Mr. Donovan's proposed cable labor inputs is to
- 7 determine their labor force implications. To do this, I compared the cable Deleted: HM 5.3...1 [34] 8 investment produced by <u>HM 5.3 Revised</u> to an alternate run in which the cable 9 labor rates were changed from the default rate of \$60 to zero. The \$37 million

(...continued)

1

6.6 percent underground. For HM 5.0a's inputs (which are the same as cable costs in the later HM 5.2a), AT&T/MCI provided materials prices in response to Data Request 13-25 in the recent California Deleted: 8 UNE proceeding. Before the California Public Utilities Commission, Docket R. 93-004-03/I. 93-004-02, Joint Commentors' Responses to Verizon's Thirteenth Set of Data Requests (Nov. 7, 2002) at Response No. 13-25. These were subtracted from the HM 5.0a default cable prices. For the HM 3.1 cable inputs, labor costs were assumed to be 60 percent of the total installed cost.

	Exhibit TJT-6T Deleted: Exhibit No. (TJT-1T) ¶ Docket No. UT-023003 Docket No. UT-023003
1	difference in cable investment between the runs is the total labor payments for
2	engineering and installing all distribution and feeder cables (including DS-1 and
3	DS-3). At a rate of \$60, this means about 300 employees would be able to
4	engineer, splice and place on poles and in buried or underground facilities all
5	the cable necessary to serve Verizon NW's customers throughout the state of
6	Washington in one year a plainly unrealistic proposition. In other words,
7	within one year, these hypothetical employees could purportedly design and
8	place every piece of cable in every neighborhood in every city where Verizon
9	NW's 1.1 million loops are located.
10	Although not as convenient, it is also possible to estimate the labor
11	expenditures for installing other outside plant facilities (e.g., NIDs, drop wire and
12	terminals, support structures, and DLC equipment). ⁸⁸ The result was a total of
13	about \$71 million, which is equivalent to less than 590 person years. That is, Deleted: 68
14	within one year, fewer than 600 employees supposedly would be able to place
15	every NID, drop wire and terminal, erect all poles, dig every trench, and place
16	all DLC equipment in every neighborhood in every city where Verizon NW's 1.1
17	million loops are located. Again, such assumptions are simply implausible.
18 Q.	HOW DO THE FCC'S SYNTHESIS MODEL'S CABLE PRICES COMPARE TO Deleted: HM 5.3
19	THE CABLE PRICES MODELED BY <u>HM 5.3 REVISED</u> ?

⁸⁸ For underground and buried trenching, and SAIs, I used the labor content percentages provided in the HAI Inputs Portfolio ("HIP") (see Mercer Supplemental Direct Testimony at Attachment RAM-5, p. 162) to separate labor costs from materials. The manhole labor content was based on the HIP at pages 90 and 93. The labor content for DLC common equipment was based on Mr. Donovan's estimates in the SBC California proceeding. Before the California Public Utilities Commission, Application Nos. 01-02-024 et al., Declaration of John C. Donovan in support of Joint Applicants' Rebuttal Comments (Mar. 12, 2003) at p. 20.

		Exhibit TJT-6T Docket No. UT-023003
		Formatted: Left
1	Α.	The cable prices estimated by the FCC's Synthesis Model are 70 percent
•	/	Deleted: approximately double
2		higher than the cable prices modeled by JHM 5.3 Revised. In fact, since cable Deleted: HM 5.3
3	I	investment accounts for a substantial proportion of total loop investment, the
4		FCC's inputs would obviously produce much higher loop costs regardless of the
5		model in which they are used. Indeed, using the FCC's copper and fiber cable
6		investment inputs (with no other input changes) in place of <u>HM 5.3 Revised</u> 's
7		inputs increases the investment per loop from \$448 to \$549 a result that Deleted: 404
		Deleted: 02
8		increases the monthly cost by 24 percent from \$8.50 to \$10.55. In a recent
9		UNE proceeding in Pennsylvania, the prices used in the Synthesis Model were
10		endorsed by Mr. Riolo, ⁸⁹ one of the original (and current) members of the HAI
11		Model's engineering team. ⁹⁰ It is inconceivable that any recent real-world
12		changes can explain the large reduction in cable prices that AT&T/MCI assert
13		are TELRIC-compliant in the instant proceeding.91
14	VII.	SPECIFIC MODELING ISSUES Deleted: HM 5.3
15		A. HM 5.3 REVISED IS NOT "INTEGRATED" AS AT&T/MCI ALLEGE
16	Q.	Deleted: HM 5.3
10	v .	De Tee Achel With DA. MERCER & Abber Hor That The 3.5 REVISED
17	•	BENEFITS FROM THE INTEGRATION OF ITS VARIOUS COMPONENTS?

⁸⁹ Before the Pennsylvania Public Utility Commission, *Direct Testimony of Joseph P. Riolo On Behalf of AT&T Communications of Pennsylvania, Inc. and MCI WorldCom Network Services, Inc.* (Dec. 7, 2001) at p.13. Mr. Riolo lowered the fiber cable investment inputs, but only for interoffice facilities.

Deleted: HM 5.3



⁹⁰ Mr. Donovan reported that he had consulted with Mr. Riolo in preparation for the filing of <u>HM 5.3</u> <u>Revised</u> in this proceeding. Before the Washington Utilities and Transportation Commission, Docket No. UT-023003, *Joint Responses of AT&T and MCI to Verizon's Second Set of Data Requests* (Aug. 4, 2003).

⁹¹ In fact Mr. Murphy reports that no "...significant changes in methods, procedures or technologies..." related to cable placement have occurred in about 25 years. Murphy Reply at p. 112.

		Exhibit TJT-6T Docket No. UT-023003		Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶
		+		Formatted: Left
1	A.	No. In listing the purported advantages of HM 5.3 Revised, Dr. Mercer claims		Deleted: HM 5.3
2		that the various components of the Model i.e., ordinary POTS loops, high-		
3		capacity loops, feeder facilities, end-office switches and interoffice facilities		Deleted: HM 5.3
4		are integrated within <u>HM 5.3 Revised</u> . ⁹² As a threshold matter, any benefits		
5		from allegedly integrating various components are far outweighed by the highly		
6		abstract and inaccurate nature of the Model. The mere existence of "bells and		
7		whistles" that ostensibly make the Model more sophisticated are of minimal		
8		value when the overall Model is unreliable.		
9		In fact, Dr. Mercer's assertion is overstated and the supposed benefits of		
10		integrating components such as loop facilities, end-office switches, and		Deleted: HM 5.3
11		interoffice facilities are illusory. ,HM 5.3 Revised's lack of integration is		()
12		demonstrated most notably by: (1) TNS's creation of clusters completely		Deleted: HM 5.3
13		separate from, and entirely outside of, HM 5.3 Revised; and (2) the lack of		
14		integration between feeder, distribution, and interoffice support structure, as		
15		discussed below. Indeed, it seems impossible to "optimize" feeder plant and		
16		interoffice facilities both of which are assumed to share 75 percent of their		
17		common support structure when the former is determined by the TNS		
18		preprocessing, and the latter are subsequently produced by an undocumented		
19		Visual Basic program.		
20		Yet another example of the un-integrated nature of the Model is provided		Deleted: HM 5.3
21		by <u>HM 5.3 Revised's modeling of interoffice transmission facilities</u> . <u>HM 5.3</u>	_	Deleted: HM 5.3
22		Revised assumes that such facilities are 29 percent aerial, 27 percent buried,		

⁹² Mercer Supplemental Direct Testimony at p. 12.

		Exhibit TJT-6T Docket No. UT-023003	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶
		4	Formatted: Left
1		and 44 percent underground in every zone there is absolutely no variation	
2		between zones. Accordingly, even in the two highest density zones where	
3		facilities would normally be in underground conduit, HM 5.3 Revised assumes	Deleted: HM 5.3
4		that 56 percent of interoffice facility structure is on poles or simply buried in	
5		trenches (and the price per foot is the same as what the Model assumes for the	
6		lowest density for distribution and feeder structure).	
7		In addition, like the overall Model itself, Dr. Mercer's alleged "integration"	
8		is represented in a highly abstract manner e.g., by simply assuming certain	
9		percentages of feeder structure can be shared with distribution. The Model	
10		does not attempt to identify common routes where structure might be shared.93	
11		For example, in larger distribution areas, there would likely be many streets with	
12		distribution cables that do not overlap with the single sub-feeder route depicted	Deleted: HM 5.3
13		by HM 5.3 Revised; therefore, the route sharing opportunities are	Deleted: HIVI 5.5
14	l	proportionately smaller than for areas with fewer distribution routes.	
15	Q.	HOW MUCH IMPACT DOES <u>HM 5.3 REVISED</u> 'S ATTEMPT AT	Deleted: HM 5.3
16		INTEGRATION HAVE ON THE COSTS AT&T/MCI HAVE PROPOSED IN	
17		THIS PROCEEDING?	
4.0			
18	А.	Very little. Dr. Mercer's emphasis on integration stems from his apparent belief	
19		that there are large savings to be had when different components of the	
20		network (e.g., feeder and distribution) share structure (e.g., telephone poles and	Deleted: HM 5.3
21		buried trenches). To test whether this was the case in <u>HM 5.3 Revised</u> , I ran	

⁹³ Before the California Public Service Commission, Docket R. 93-004-03/I. 93-004-02, Workshop Transcript (Jan. 15, 2004) at p. 3563.

	Exhibit TJT-6T Docket No. UT-023003 Formatted: Left
1	two scenarios that removed all of the sharing assumptions from HM 5.3
2	Revised. Specifically, I changed the inputs that assume sharing between
3	distribution and feeder, and between feeder and interoffice routes, from their
4	defaults of 55 percent and 75 percent sharing, respectively, to zero. As a
5	result, the loop cost increased only slightly from \$8.50 to \$8.64, and the total Deleted: 7.64 Deleted: 7.77
6	cost of network elements (which would reflect the cost of both input changes)
7	increased a comparably minimal amount, from \$15.44 to \$15.71.94 To test the Deleted: 14.84
8	impact of structure sharing between POTS and high-capacity facilities, I
9	changed the <u>HM 5.3 Revised</u> database so that all high-capacity lines had zero
10	demand. Removing this facilities' sharing in other words, effectively
11	assigning all structure costs to ordinary loops again increased the loop cost a
12	minimal amount (from \$8.50 to \$8.59). ⁹⁵ The practical consequence of the Deleted: 7.69
13	minimal impact of these highly-touted features is that their presence plainly
14	demonstrates the unreliable, and fundamentally flawed, nature of <u>HM 5.3</u>
15	Revised. ⁹⁶

⁹⁴ The minimal impact could be due, in part, to the fact that the Model produces the illogical result that when the amount of sharing of interoffice structure with other utilities is reduced (i.e., Verizon NW purportedly incurs more of these costs), both the investment and monthly cost of an ordinary loop *decrease*. For example, when the proportion of sharing with other utilities decreases from the default assumption of 67 percent to no sharing, loop investment per line decreases from \$<u>448</u> to \$<u>441</u>; and the corresponding monthly cost is reduced from \$<u>8.50</u> to \$<u>8.40</u>.

⁹⁵ As Staff witness Spinks observes, the explicit treatment of high-capacity loops in <u>HM 5.3 Revised</u> distinguishes the Model from previous versions, e.g., such as HM 5.2a. The representation of high-capacity loops as multiple ordinary loops in the earlier versions of the substantially reduced ordinary loops costs, perhaps leading its proponents to the conclusion that HAI Model there should be large savings from sharing structures.

⁹⁶ An exhaustive explanation of why the inclusion of high-capacity loops has such a modest impact on ordinary loop costs would have to consider, among other things, the interactions among: (1) the impact of the flawed representation of how high-capacity loops are assumed to share outside plant and DLC facilities with ordinary loops (as described by Mr. Murphy), (2) the assumed levels of (continued...)

Deleted: 404 Deleted: 398 Deleted: 7.64 Deleted: 7.54 Deleted: HM 5.3

		<u>Exhibit TJT-6T</u> Docket No. UT-023003	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶
		4	Formatted: Left
1	Q.	ARE THERE OTHER FEATURES THAT DR. MERCER DEEMED "HIGHLY	
2		SOPHISTICATED" THAT HAVE A EQUALLY MINIM AL IMPACT ON	
3		COSTS?	
4	A.	Yes. Part of the basis for Dr. Mercer's assertion that <u>HM 5.3 Revised</u> is "highly	Deleted: HM 5.3
5		sophisticated"97 appears to be the Model's dubious "optimization" feature, as	
6		well as other, similarly flawed, modeling techniques. However, as with the	
7		sharing assumptions discussed above, these features have minimal to no effect	
8		on cost. For example:	
9 10 11		 The feature that is designed to optimize between aerial and buried placement⁹⁸ only reduces loop costs by a miniscule amount (0.07 percent). 	Deleted: 8
12 13 14 15		 Ignoring terrain effects,⁹⁹ by setting them to the most favorable conditions everywhere, causes only a 0,<u>49</u> percent decline in loop costs, resulting in little more than a four-cent change in unit costs. 	Deleted: 52
16		In summary, some of the specific features that HM 5.3 Revised's sponsors have	Deleted: HM 5.3
17		touted as extremely beneficial appear to be of minimal importance. In	
18		particular, HM 5.3 Revised's lack of sensitivity to how much sharing might take	Deleted: HM 5.3
19		place between various parts of the network clearly implies that AT&T/MCI's	Deleted: HM 5.3
20		attempts to use such features to demonstrate the superiority of HM 5.3 Revised	
21		over VzCost are essentially meaningless.	

(...continued)

structure sharing with other utilities, and (3) the inputs used for structure and cable, particularly Mr. Donovan's estimates of engineering and installation labor.

⁹⁷ Mercer Supplemental Direct Testimony at pp. 5, 30-31.

⁹⁸ Mercer Supplemental Direct Testimony at RAM-4 (HIP) at pp. 34-36.

⁹⁹ Mercer Supplemental Direct Testimony at RAM-4 (HIP) at pp. 40-42.

⁶⁸

		<u>Exhibit TJT-6T</u> Docket No. UT-023003		Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶
4		•		Formatted: Left Deleted: HM 5.3
1		B. SPECIFIC EXAMPLES WHERE THE <u>HM 5.3 REVISED</u>		
2		CALCULATIONS PRODUCE INSUFFICIENT AND/OR		
3		INACCURATE INVESTMENT		
4		1. SAI SIZE LIMIT OPTION		
5	Q.	PLEASE DESCRIBE, HM 5.3 REVISED'S NEW OPTION TO LIMIT THE		Deleted: HM 5.3
6		MAXIMUM SIZE OF AN SAI.		
7	Α.	Although AT&T/MCI recommend the use of large SAIs and large RTs or CEVs,		Deleted: HM 5.3
8		HM 5.3 Revised provides an option to limit the size of SAIs. ¹⁰⁰ In contrast to the		Deleted: HM 5.3
9		typical placement of the SAI at the center of a distribution area, HM 5.3 Revised		Deleteu: HM 5.5
10		purportedly can now place multiple, smaller SAIs within a given cluster. ¹⁰¹		
11		Curiously, Mr. Donovan has reported that this option would either modestly		
12		increase cost, ¹⁰² or have a slight impact in either direction. ¹⁰³		
13	Q.	DOES LIMITING THE MAXIMUM SIZE OF THE SAI HAVE THE EFFECT MR.		
14		DONOVAN EXPECTED?		
15	A.	No. Invoking the SAI size limit option produces a loop cost of \$7, <u>88</u> , noticeably		Deleted: 26
16		lower than <u>HM 5.3 Revised</u> 's default result of <u>\$8.50</u> . Similarly, the average	/	Deleted: HM 5.3 Deleted: 7.64
	withi	del Description at p. 40. It should be noted, however, that a meaningful limit on RT capacity n distribution areas cannot be implemented within <u>HM 5.3 Revised</u> , but can only be imposed by		Deleted: HM 5.3
	re-ru	inning the TNS clustering process.		

¹⁰¹ Mr. Murphy explains in detail why this option does not work and the counterintuitive results produced when the option is invoked. See also Murphy Reply Testimony for an explanation of why smaller clusters should produce increased feeder lengths but no change in distribution length.

¹⁰² Before the California Public Utilities Commission, Application Nos. 01-02-024 et al., Workshop Transcripts (June 25, 2003) at p. 655.

	Exhibit TJT-6T Docket No. UT-023003	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶
		Formatted: Left
4	investment per less decresses from \$449 to \$417, with the shange due to	Deleted: 447
1	investment per loop decreases from \$448 to \$417, with the change due to	Deleted: 404
2	puzzling reductions in distribution cable and RT investments. This outcome	Deleted: 386
3	strongly suggests that the option has not been properly implemented, and may	
4	be the product of input and/or algorithm errors.	
5	2. SAI CAPACITY	·
6 Q.	DOES HM 5.3 REVISED MODEL SUFFICIENT SAI CAPACITY?	Deleted: HM 5.3
7 A .	No. Mr. Donovan's definition of distribution fill is the ratio of customer lines in a	
8	cluster to the number of pairs in the backbone cables that terminate at the SAI.	
9	Presumably, in order for those pairs to be available as spare capacity, there	
0	needs to be room at the SAI to connect them. For example, if a distribution	
1	area were served with two 600-pair backbone cables and the (sub) feeder cable	
2	was 900-pair, the SAI would need a capacity of at least 2,100 pairs (2 x 600 +	Deleted: HM 5.3
3	900). However, the formulas used in <u>HM 5.3 Revised do not insure that the</u>	Dictor I III 00
4	required SAI capacity is provided.	
5	For example, consider Cluster 2 in the ACME wire center. The relevant	
6	characteristics are as follows:	
7	Total lines: 397	
3	Total Households: 265	
9	Total non-residential lines: ¹⁰⁴ 61	
0	Calculated distribution fill: 49.6%	

¹⁰³ Before the California Public Utilities Commission, Docket R.93-04-003/I.93-04-002, Workshop Transcripts (Jan. 15, 2004) at p. 3639.

¹⁰⁴ In sizing the SAI, <u>HM 5.3 Revised</u> counts each business, voice-grade dedicated circuit, ISDN, and <u>Deleted</u>: HM 5.3 dedicated ASDL line as one line, and each DS-1 as two non-residential lines.



		Exhibit TJT-6T Docket No. UT-023003	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶ Formatted: Left
1	I	Feeder sizing factor: 80%	
2	ĺ	<u>HM 5.3 Revised</u> produces the required SAI line capacity by multiplying the	Deleted: HM 5.3
3		number of households by 3.5 and the number of non-residential lines by 2 (i.e.,	
4	l	$3.5 \times 265 + 2 \times 61 = 989$). <u>HM 5.3 Revised</u> then utilizes the next largest SAI	Deleted: HM 5.3
5		size of 1,200.	
6		The calculated distribution fill implies that 800 lines terminate at the SAI	
7		on the distribution side (397/0.496). Applying the 80 percent feeder-sizing	
8		factor produces a required capacity of 497 lines, which requires a 600-pair	
9		feeder cable. Thus, there would be an SAI capacity shortfall of 200 lines in this	
10		example (800 + 600 - 1,200).	
11		The situation illustrated by this example is very common: 551 of the 829	
12		main clusters produced by the Model have SAIs that are too small to handle the	
13		distribution and feeder cables that are supposed to meet at the SAI.	
14		Importantly, these clusters account for over 1.02 million of the approximately	
15		1.06 million lines modeled by <u>HM 5.3 Revised</u> .	Deleted: HM 5.3
16	Q.	IS THERE ANOTHER WAY TO ILLUSTRATE THE INADEQUATE SAI	
17		CAPACITY?	
18	Α.	Yes. <u>HM 5.3 Revised</u> 's achieved fills are approximately 50 percent for	Deleted: HM 5.3
19		distribution and 80 percent for feeder. Putting aside the insufficiency of such	
20		fills, the fact is, the capacity implied by these figures is only available if all of the	
21		pairs can terminate at the SAI. In particular, the SAI must have space for about	
22		2 connections at the distribution side $(1/0.5)$ and 1.25 at the feeder side $(1/0.8)$,	
23		or about 3.25 overall. Therefore, the total SAI capacity required to	

		Exhibit TJT-6T Docket No. UT-023003	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶ Formatted: Left
1		accommodate Verizon NW's 1.06 million lines is about 3.5 million connections.	Deleted UN 52
2	ĺ	HM 5.3 Revised, in contrast, provides only 2.6 million connections.	Deleted: HM 5.3
3	Q.	CAN A USER CHANGE AN INPUT TO PROVIDE MORE SAI CAPACITY? ¹⁰⁵	
4	Α.	No. There are no inputs that allow the user to adjust SAI capacities.	
5		Accordingly, the under-sizing of SAIs cannot be fixed short of changing specific	Deleted: HM 5.3
6		formulas in, <u>HM 5.3 Revised</u> . Consequently, the reported achieved distribution	Deleted: HM 5.3
7	l	and feeder fills, which are themselves unrealistically high, cannot be realized	
8		because all pairs cannot be connected at the SAI.	
9	Q.	ARE THERE PARTICULARLY EXTREME EXAMPLES OF INADEQUATE SAI	
10		CAPACITY?	
11	Α.	Yes. <u>HM 5.3 Revised</u> assumes that 8 clusters are "high-rise" buildings, which	Deleted: HM 5.3
12		range in size from a "building" of 62 floors in the Everett (XC) wire center 106 to a	
13	ĺ	"high rise" of a single story. ¹⁰⁷ For these clusters, <u>HM 5.3 Revised</u> assumes	Deleted: HM 5.3
14		that there is an indoor SAI in the basement of a building and riser cables within	
15		the building. As Mr. Murphy explains in detail, <u>HM 5.3 Revised</u> therefore places	Deleted: HM 5.3
16		only 8 indoor SAIs throughout Verizon NW's entire territory, and, in the process,	
	item inter the asto	the SBC California UNE proceeding, ALJ Duda requested a table that contained, among other s, the achieved SAI fill. This request required special calculations with <u>HM 5.3 Revised</u> 's mediate output, similar to my analysis here. For that exercise, AT&T/MCI defined the SAI fill as ratio of twice the number of lines to total SAI capacity. This definition would produce an unding 83 percent fill for Verizon NW. tably, the New Jersey Board cited the HAI Model's anomalous treatment of high -rise buildings	Deleted: HM 5.3
	(i.e.,	its erroneous representation of extremely tall buildings) as one of its main reasons for rejecting model. New Jersey Order at p. 25.	

Deleted: HM 5.3

¹⁰⁷ <u>HM 5.3 Revised</u> estimates the size of a high-rise building by first assuming its footprint is 8,000 square feet. It next estimates the required floor space by assuming that each household requires 1,500 square feet and each employee requires 200 square feet. The required floor space is then divided by the building's footprint to estimate the number of stories. Model Description at p. 34.

I		Exhibit TJT-6T	Deleted: Exhibit No (TJT-1T) ¶
		Docket No. UT-023003	Docket No. UT-023003¶
		4	Formatted: Left
1		reduces costs by substituting low-cost aerial distribution structures for costly	
2		underground feeder facilities in high density areas.	
3		Further, in all such buildings, the indoor SAIs are too small to	
4		accommodate the feeder and riser cable that need to be joined. The most	
5		extreme example is the "high-rise" building in Everett (XC) of one story. It is	
6		equipped with a 50-line SAI (typically sufficient for under 20 working lines), yet	
7		contains 551 lines.	
8		3. STRAND-DISTANCE CONSTRAINT	
9	Q.	WHAT PROBLEMS, IF ANY, HAVE YOU AND VERIZON NW'S OTHER	
10		WITNESSES ENCOUNTERED WITH HM 5.3 REVISED'S STRAND	Deleted: HM 5.3
11		DISTANCE CONSTRAINT?	
12	А.	As Mr. Dippon describes, in low-density areas, a fundamental problem arises	
13		when irregularly shaped clusters formed in TNS's preprocessing stage are	
14		converted into rectangles of the same area for use in <u>HM 5.3 Revised</u> 's	Deleted: HM 5.3
15		distribution module. The FCC recognized this, finding that:	
16 17 18 19 20 21 22 23 24 25		HAI's approach of designing plant to simplified customer locations within rectangularized serving areas, instead of to actual customer locations, could result in a systematic underestimation of outside plant costs … The HAI Model also sacrifices accuracy by assuming that customers are dispersed uniformly within its distribution areas … We agree that inaccuracies may be introduced by modifying the geographical boundaries of distribution areas and the location of customers within those areas for purposes of constructing outside plant. ¹⁰⁸	

¹⁰⁸ Fifth Report and Order, In re Federal-State Joint Board on Universal Service, In re Forward-Looking Cost Mechanism for High Cost Support for Non-Rural LECs, 13 FCC Rcd 21323, ¶¶ 57-58 (1998) ("Fifth Report and Order").

	<u>Exhibit TJT-6T</u> Docket No. UT-023003	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶ Formatted: Left
1	The Florida Commission reached an almost identical conclusion:	(romatted.ten
2 3 4 5 6 7 8 9 10	HAI has certain defects and we cannot recommend reliance on its cost estimates. While the HAI Model starts out with data on actual customer locations, <i>it disregards</i> <i>much meaningful information and chooses not to b uild</i> <i>plant to any of these known sites.</i> Instead, for modeling convenience, what began as irregular polygons reflecting natural customer groupings were transformed into regular rectangles. Unfortunately, this step appears to have introduced a downward bias into the model. ¹⁰⁹	
11	Despite the fact that the Model's proponents seem to have been	
12	ambivalent on the use of the strand distance, ¹¹⁰ to address this problem, the	
13	Model now includes an option that adjusts the distribution distance to the strand	
14	distance (a form of "minimum spanning tree" ("MST") distance). ¹¹¹ In addition,	
15	although the option was introduced to address regulators' concerns about	
16	insufficient facilities in low-density areas (thus producing costs that are too low),	
17	using the option has typically reduced the estimated costs in higher density	Deleted: Indeed
18	areas. However , for Verizon NW, the constraint <u>in</u> creases both total route	Deleted: de
19	distance (from 83.8 million to <u>94.5 million feet) and the resulting estimated loop</u>	Deleted: 80.6
	 ⁰⁹ Before the Florida Public Service Commission, Docket No. 980696-TP, <i>Final Order Providing Definition of Basic Local Telecommunications Service and Closing Docket</i> (Jan. 7, 1999) at pp. 11-12 (emphasis added). ¹⁰ In earlier versions of the HAI Model, its proponents expressed strong reservations about the usefulness of the strand distance adjustment: "Setting the switch 'off' would be consistent with the HAI Model developers' strong reservations about the usefulness of the MST [minimum spanning tree] as an indicator of what the DRD [distribution route distance] should be." Before the Massachusetts Department of Telecommunications and Energy, D.T.E. 01-20, <i>Direct Testimony of Robert A. Mercer on behalf of AT&T</i> (May 8, 2001) at RAM-3 (HAI Model Release 5.2a-MA Inputs Portfolio) at Section 2.13.1, p. 47. This qualification has been removed from the current version of the <u>HM 5.3 Revised</u> Inputs Portfolio. 	Deleted: HM 5.3

Inputs Portfolio. ¹¹¹ The MST distance is a construct from graph theory. A spanning tree is a set of line segments that connect every point in a dispersion of points, simply drawing a line from one point to another. Dr. Mercer reports that these lines are based on right-angle routing. The MST for a set of points is the set of connecting line segments whose total length is the shortest possible for the given set of points. (continued...)

		Exhibit TJT-6T Docket No. UT-023003	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT 023003¶
		← − − − − − − − − − − − − − − − − − − −	Formatted: Left
1		cost (from \$8.18 to \$8.50). More importantly, if anything, HM 5.3 Revised's use	Deleted: 7.64
1			Deleted: HM 5.3
2		of the strand distance makes the distribution clusters less representative of the	
3		areas in which Verizon NW's actual customers live.	
4	Q.	WHAT OTHER PROBLEMS ARE ASSOCIATED WITH THE MODEL'S USE	
5		OF THE MST ADJUSTMENT?	
6	Α.	The Model's MST adjustment only serves to further distort the clusters modeled	Deleted: HM 5.3
7		by <u>HM 5.3 Revised</u> . <u>HM 5.3 Revised</u> 's distribution module calculates the ratio	Deleted: HM 5.3
8		of the unadjusted distribution distance produced by the Model to the MST	
9		distance. All distribution distances (e.g., cable lengths and associated support	
10		structure distances) are scaled by this ratio. The associated investment and	
11		expenses for distribution plant are then based on these scaled distances. As a	
12		result, the MST adjustment distorts all of the clusters (and implicitly the	Deleted: HM 5.3
13		customer locations within the clusters) modeled by HM 5.3 Revised a fact that	
14		only exacerbates the clusters' distortion of actual customer locations identified	
15		by Mr. Dippon and recognized by the FCC and the Florida Commission. For	
16		example, when the MST adjustment calls for less cable than the Model would	
17		have provided absent the adjustment, the rectangular clusters are compressed	
18		along both dimensions. In the process, customers are in effect packed into	
19		smaller, higher density lots. Conversely, when the strand distance exceeds the	
20		calculated route distance, the cluster in effect expands and potentially overlaps	

(...continued)

The MST distance is a measure of the dispersion of a set of points, and is provided in the cluster database by TNS.

 in the intervention of the interventing intervention of the intervention of t			Exhibit TJT-6T Docket No. UT-023003	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶
 phenomena. Q. IS,HM 5.3 REVISED'S EXPANSION AND COMPRESSION OF DISTRIBUTION FACILITIES THROUGH THE STRAND DISTANCE ADJUSTMENT A REASONABLE APPROXIMATION OF HOW FACILITIES ARE PLACED WITHIN DISTRIBUTION AREAS? A. No. Unlike the abstract "grill," which then is scaled up or down to match TNS's strand distance, in the real world, cables are routed, and the specific sizes of the cables linking the distribution terminals to the SAI are chosen to fit the unaltered layout of a distribution area. <u>HM 5.3 Revised's modeling techniques</u> thus represent a significant break from reality. As Mr. Dippon describes in detail, while the TNS clustering process results in clusters with irregular areas, <u>HM 5.3 Revised: (1) distorts these areas into rectangles; (2) essentially</u> assumes that locations are evenly distributed over the rectangles; (3) builds a specific grid of backbone and branch cables to fill the rectangles; (3) builds a specific grid of the grid to match TNS's strand distance measure. In the process, the Model either shrinks or expands the entire grid (cable sizes and 			4	Formatted: Left
3 Q. IS_HM 5.3 REVISED'S EXPANSION AND COMPRESSION OF Deleted: HM 5.3 4 DISTRIBUTION FACILITIES THROUGH THE STRAND DISTANCE 5 ADJUSTMENT A REASONABLE APPROXIMATION OF HOW FACILITIES 6 ARE PLACED WITHIN DISTRIBUTION AREAS? 7 A. No. Unlike the abstract "grill," which then is scaled up or down to match TNS's 8 strand distance, in the real world, cables are routed, and the specific sizes of 9 the cables linking the distribution terminals to the SAI are chosen to fit the 10 unaltered layout of a distribution area. HM 5.3 Revised's modeling techniques 11 thus represent a significant break from reality. As Mr. Dippon describes in 12 detail, while the TNS clustering process results in clusters with irregular areas, 13 HM 5.3 Revised (1) distorts these areas into rectangles; (2) essentially 14 assumes that locations are evenly distributed over the rectangles; (3) builds a 15 specific grid of backbone and branch cables to fill the rectangle; ¹¹² and (4) at 16 the end of the grid to match TNS's strand distance measure. In the 17 the total length of the grid to match TNS's strand distance measure. In the 18 process, the Model either shrinks or expands the entire grid (cable sizes and <td>1</td> <td></td> <td>with adjoining clusters. Mr. Dippon provides maps that illustrate these</td> <td></td>	1		with adjoining clusters. Mr. Dippon provides maps that illustrate these	
 Q. IS_HM 5.3 REVISED'S EXPANSION AND COMPRESSION OF DISTRIBUTION FACILITIES THROUGH THE STRAND DISTANCE ADJUSTMENT A REASONABLE APPROXIMATION OF HOW FACILITIES ARE PLACED WITHIN DISTRIBUTION AREAS? A. No. Unlike the abstract "grill," which then is scaled up or down to match TNS's strand distance, in the real world, cables are routed, and the specific sizes of the cables linking the distribution terminals to the SAI are chosen to fit the unaltered layout of a distribution area. <u>HM 5.3 Revised</u>'s modeling techniques thus represent a significant break from reality. As Mr. Dippon describes in detail, while the TNS clustering process results in clusters with irregular areas, <u>HM 5.3 Revised</u> (1) distorts these areas into rectangles; (2) essentially assumes that locations are evenly distributed over the rectangles; (3) builds a specific grid of backbone and branch cables to fill the rectangle; ¹¹² and (4) at the end of the process, attempts to impose a semblance of realism by forcing the total length of the grid to match TNS's strand distance measure. In the process, the Model either shrinks or expands the entire grid (cable sizes and 	2		phenomena.	
 ADJUSTMENT A REASONABLE APPROXIMATION OF HOW FACILITIES ARE PLACED WITHIN DISTRIBUTION AREAS? No. Unlike the abstract "grill," which then is scaled up or down to match TNS's strand distance, in the real world, cables are routed, and the specific sizes of the cables linking the distribution terminals to the SAI are chosen to fit the unaltered layout of a distribution area. <u>HM 5.3 Revised's modeling techniques</u> thus represent a significant break from reality. As Mr. Dippon describes in detail, while the TNS clustering process results in clusters with irregular areas, <u>HM 5.3 Revised</u> (1) distorts these areas into rectangles; (2) essentially assumes that locations are evenly distributed over the rectangles; (3) builds a specific grid of backbone and branch cables to fill the rectangle;¹¹² and (4) at the end of the process, attempts to impose a semblance of realism by forcing the total length of the grid to match TNS's strand distance measure. In the process, the Model either shrinks or expands the entire grid (cable sizes and 	3	Q.	IS, HM 5.3 REVISED'S EXPANSION AND COMPRESSION OF	Deleted: HM 5.3
 ARE PLACED WITHIN DISTRIBUTION AREAS? No. Unlike the abstract "grill," which then is scaled up or down to match TNS's strand distance, in the real world, cables are routed, and the specific sizes of the cables linking the distribution terminals to the SAI are chosen to fit the unaltered layout of a distribution area. <u>HM 5.3 Revised's modeling techniques</u> thus represent a significant break from reality. As Mr. Dippon describes in detail, while the TNS clustering process results in clusters with irregular areas, <u>HM 5.3 Revised</u> (1) distorts these areas into rectangles; (2) essentially assumes that locations are evenly distributed over the rectangles; (3) builds a specific grid of backbone and branch cables to fill the rectangle; ¹¹² and (4) at the end of the process, attempts to impose a semblance of realism by forcing the total length of the grid to match TNS's strand distance measure. In the process, the Model either shrinks or expands the entire grid (cable sizes and 	4		DISTRIBUTION FACILITIES THROUGH THE STRAND DISTANCE	
 A. No. Unlike the abstract "grill," which then is scaled up or down to match TNS's strand distance, in the real world, cables are routed, and the specific sizes of the cables linking the distribution terminals to the SAI are chosen to fit the unaltered layout of a distribution area. <u>HM 5.3 Revised's modeling techniques</u> thus represent a significant break from reality. As Mr. Dippon describes in detail, while the TNS clustering process results in clusters with irregular areas, <u>JHM 5.3 Revised</u> (1) distorts these areas into rectangles; (2) essentially assumes that locations are evenly distributed over the rectangles; (3) builds a specific grid of backbone and branch cables to fill the rectangle;¹¹² and (4) at the end of the process, attempts to impose a semblance of realism by forcing the total length of the grid to match TNS's strand distance measure. In the process, the Model either shrinks or expands the entire grid (cable sizes and 	5		ADJUSTMENT A REASONABLE APPROXIMATION OF HOW FACILITIES	
 strand distance, in the real world, cables are routed, and the specific sizes of the cables linking the distribution terminals to the SAI are chosen to fit the unaltered layout of a distribution area. <u>HM 5.3 Revised's modeling techniques</u> thus represent a significant break from reality. As Mr. Dippon describes in detail, while the TNS clustering process results in clusters with irregular areas, <u>HM 5.3 Revised</u> (1) distorts these areas into rectangles; (2) essentially assumes that locations are evenly distributed over the rectangles; (3) builds a specific grid of backbone and branch cables to fill the rectangle; ¹¹² and (4) at the end of the process, attempts to impose a semblance of realism by forcing the total length of the grid to match TNS's strand distance measure. In the process, the Model either shrinks or expands the entire grid (cable sizes and 	6		ARE PLACED WITHIN DISTRIBUTION AREAS?	
 the cables linking the distribution terminals to the SAI are chosen to fit the unaltered layout of a distribution area. <u>HM 5.3 Revised's modeling techniques</u> thus represent a significant break from reality. As Mr. Dippon describes in detail, while the TNS clustering process results in clusters with irregular areas, <u>JHM 5.3 Revised</u> (1) distorts these areas into rectangles; (2) essentially assumes that locations are evenly distributed over the rectangles; (3) builds a specific grid of backbone and branch cables to fill the rectangle;¹¹² and (4) at the end of the process, attempts to impose a semblance of realism by forcing the total length of the grid to match TNS's strand distance measure. In the process, the Model either shrinks or expands the entire grid (cable sizes and 	7	Α.	No. Unlike the abstract "grill," which then is scaled up or down to match TNS's	
 unaltered layout of a distribution area. <u>HM 5.3 Revised's modeling techniques</u> thus represent a significant break from reality. As Mr. Dippon describes in detail, while the TNS clustering process results in clusters with irregular areas, <u>HM 5.3 Revised</u> (1) distorts these areas into rectangles; (2) essentially assumes that locations are evenly distributed over the rectangles; (3) builds a specific grid of backbone and branch cables to fill the rectangle;¹¹² and (4) at the end of the process, attempts to impose a semblance of realism by forcing the total length of the grid to match TNS's strand distance measure. In the process, the Model either shrinks or expands the entire grid (cable sizes and 	8		strand distance, in the real world, cables are routed, and the specific sizes of	
 unaltered layout of a distribution area. <u>HM 5.3 Revised's modeling techniques</u> thus represent a significant break from reality. As Mr. Dippon describes in detail, while the TNS clustering process results in clusters with irregular areas, <u>HM 5.3 Revised</u> (1) distorts these areas into rectangles; (2) essentially assumes that locations are evenly distributed over the rectangles; (3) builds a specific grid of backbone and branch cables to fill the rectangle; ¹¹² and (4) at the end of the process, attempts to impose a semblance of realism by forcing the total length of the grid to match TNS's strand distance measure. In the process, the Model either shrinks or expands the entire grid (cable sizes and 	9		the cables linking the distribution terminals to the SAI are chosen to fit the	Deleted, HM 5.2
 detail, while the TNS clustering process results in clusters with irregular areas, JHM 5.3 Revised (1) distorts these areas into rectangles; (2) essentially assumes that locations are evenly distributed over the rectangles; (3) builds a specific grid of backbone and branch cables to fill the rectangle;¹¹² and (4) at the end of the process, attempts to impose a semblance of realism by forcing the total length of the grid to match TNS's strand distance measure. In the process, the Model either shrinks or expands the entire grid (cable sizes and 	10		unaltered layout of a distribution area. <u>HM 5.3 Revised</u> 's modeling techniques	Deleted: HM 5.3
Deleted: HM 5.3 13 JHM 5.3 Revised: (1) distorts these areas into rectangles; (2) essentially 14 assumes that locations are evenly distributed over the rectangles; (3) builds a 15 specific grid of backbone and branch cables to fill the rectangle; ¹¹² and (4) at 16 the end of the process, attempts to impose a semblance of realism by forcing 17 the total length of the grid to match TNS's strand distance measure. In the 18 process, the Model either shrinks or expands the entire grid (cable sizes and	11		thus represent a significant break from reality. As Mr. Dippon describes in	
13HM 5.3 Revised (1) distorts these areas into rectangles; (2) essentially14assumes that locations are evenly distributed over the rectangles; (3) builds a15specific grid of backbone and branch cables to fill the rectangle; ¹¹² and (4) at16the end of the process, attempts to impose a semblance of realism by forcing17the total length of the grid to match TNS's strand distance measure. In the18process, the Model either shrinks or expands the entire grid (cable sizes and	12		detail, while the TNS clustering process results in clusters with irregular areas,	Deleted: HM 5.3
 specific grid of backbone and branch cables to fill the rectangle;¹¹² and (4) at the end of the process, attempts to impose a semblance of realism by forcing the total length of the grid to match TNS's strand distance measure. In the process, the Model either shrinks or expands the entire grid (cable sizes and 	13		HM 5.3 Revised (1) distorts these areas into rectangles; (2) essentially	
 the end of the process, attempts to impose a semblance of realism by forcing the total length of the grid to match TNS's strand distance measure. In the process, the Model either shrinks or expands the entire grid (cable sizes and 	14		assumes that locations are evenly distributed over the rectangles; (3) builds a	
 the total length of the grid to match TNS's strand distance measure. In the process, the Model either shrinks or expands the entire grid (cable sizes and 	15		specific grid of backbone and branch cables to fill the rectangle; ¹¹² and (4) at	
18 process, the Model either shrinks or expands the entire grid (cable sizes and	16		the end of the process, attempts to impose a semblance of realism by forcing	
	17		the total length of the grid to match TNS's strand distance measure. In the	
all), with no regard as to how the locations originally included in the cluster	18		process, the Model either shrinks or expands the entire grid (cable sizes and	
	19		all), with no regard as to how the locations originally included in the cluster	
20 could actually be connected.	20		could actually be connected.	

¹¹² At this stage of the process, distribution cables run one lot length or width short of the edges of the rectangle.

		Exhibit TJT-6T Docket No. UT-023003	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶
			Formatted: Left
1		In contrast, VzLoop produces a much more realistic representation of	
2	1	these routes than does JHM 5.3 Revised's abstract "grills." ¹¹³ Verizon's cost	Deleted: HM 5.3
3		model starts with the actual locations of the distribution terminals and the	
4		specific SAIs to which those terminals are assigned. It then designs plant to	
5		these locations without any distortions (e.g., it does not assume that customers	Deleted UM 5.2
6		are evenly dispersed over perfect rectangles, as <u>HM 5.3 Revised</u> does).	Deleted: HM 5.3
7		Further, unlike, HM 5.3 Revised, VzLoop has specific information on the type of	Deleted: HM 5.3
8		structure (e.g., buried or underground) that would be used to connect locations	
9		within distributions areas, thereby producing a much more realistic depiction of	
10		Variana NNVa femural laction actival	
10		Verizon NW's forward-looking network.	
	Q.	ARE THERE ANY SPECIFIC PROBLEMS CAUSED BY HM 5.3 REVISED'S	Deleted: HM 5.3
11	Q.		Deleted: HM 5.3
11 12	Q.	ARE THERE ANY SPECIFIC PROBLEMS CAUSED BY HM 5.3 REVISED'S	Deleted: HM 5.3
11 12 13	Q. A.	ARE THERE ANY SPECIFIC PROBLEMS CAUSED BY <u>HM 5.3 REVISED'S</u> EXPANSION AND COMPRESSION OF DISTRIBUTION FACILITIES	Deleted: HM 5.3 Deleted: HM 5.3
11 12 13 14		ARE THERE ANY SPECIFIC PROBLEMS CAUSED BY <u>HM 5.3 REVISED'S</u> EXPANSION AND COMPRESSION OF DISTRIBUTION FACILITIES THROUGH THE STRAND DISTANCE ADJUSTMENT?	
 10 11 12 13 14 15 16 		ARE THERE ANY SPECIFIC PROBLEMS CAUSED BY <u>HM 5.3 REVISED'S</u> EXPANSION AND COMPRESSION OF DISTRIBUTION FACILITIES THROUGH THE STRAND DISTANCE ADJUSTMENT? Yes. Mr. Murphy identified numerous instances where <u>HM 5.3 Revised</u>	
11 12 13 14 15		ARE THERE ANY SPECIFIC PROBLEMS CAUSED BY <u>HM 5.3 REVISED'S</u> EXPANSION AND COMPRESSION OF DISTRIBUTION FACILITIES THROUGH THE STRAND DISTANCE ADJUSTMENT? Yes. Mr. Murphy identified numerous instances where <u>HM 5.3 Revised</u> produces copper loop distances that exceed the purported maximum threshold.	Deleted: HM 5.3
11 12 13 14 15	A.	ARE THERE ANY SPECIFIC PROBLEMS CAUSED BY <u>HM 5.3 REVISED'S</u> EXPANSION AND COMPRESSION OF DISTRIBUTION FACILITIES THROUGH THE STRAND DISTANCE ADJUSTMENT? Yes. Mr. Murphy identified numerous instances where <u>HM 5.3 Revised</u> produces copper loop distances that exceed the purported maximum threshold.	Deleted: HM 5.3
11 12 13 14 15	A.	ARE THERE ANY SPECIFIC PROBLEMS CAUSED BY <u>HM 5.3 REVISED'S</u> EXPANSION AND COMPRESSION OF DISTRIBUTION FACILITIES THROUGH THE STRAND DISTANCE ADJUSTMENT? Yes. Mr. Murphy identified numerous instances where <u>HM 5.3 Revised</u> produces copper loop distances that exceed the purported maximum threshold. This error arises from the fact that, while <u>HM 5.3 Revised</u> is designed to prevent 5.3 Revised's proponents frequently assert that the Model's representation of distribution areas phably approximates how the FCC's Synthesis Model treats distribution areas. Bryant Direct inony at p. 16. This is false. In fact, VzLoop comesmuch closer to what the FCC's Synthesis el intends to accomplish than does <u>HM 5.3 Revised</u> . VzLoop and the Synthesis Model both start	Deleted: HM 5.3 Deleted: HM 5.3
11 12 13 14 15	A.	ARE THERE ANY SPECIFIC PROBLEMS CAUSED BY <u>HM 5.3 REVISED'S</u> EXPANSION AND COMPRESSION OF DISTRIBUTION FACILITIES THROUGH THE STRAND DISTANCE ADJUSTMENT? Yes. Mr. Murphy identified numerous instances where <u>HM 5.3 Revised</u> produces copper loop distances that exceed the purported maximum threshold. This error arises from the fact that, while <u>HM 5.3 Revised</u> is designed to prevent <u>5.3 Revised's proponents frequently assert that the Model's representation of distribution areas</u> onably approximates how the FCC's Synthesis Model treats distribution areas. Bryant Direct imony at p. 16. This is false. In fact, VzLoop comesmuch closer to what the FCC's Synthesis el intends to accomplish than does <u>HM 5.3 Revised</u> . VzLoop and the Synthesis Model both start measurements of where distribution terminals are located and where those terminals are gned to specific SAIs. Both models then design plant to these locations without any distortions	Deleted: HM 5.3 Deleted: HM 5.3 Deleted: HM 5.3 Deleted: HM 5.3
11 12 13 14 15	A.	ARE THERE ANY SPECIFIC PROBLEMS CAUSED BY <u>HM 5.3 REVISED'S</u> EXPANSION AND COMPRESSION OF DISTRIBUTION FACILITIES THROUGH THE STRAND DISTANCE ADJUSTMENT? Yes. Mr. Murphy identified numerous instances where <u>HM 5.3 Revised</u> produces copper loop distances that exceed the purported maximum threshold. This error arises from the fact that, while <u>HM 5.3 Revised</u> is designed to prevent 5.3 Revised's proponents frequently assert that the Model's representation of distribution areas onably approximates how the FCC's Synthesis Model treats distribution areas. Bryant Direct mony at p. 16. This is false. In fact, VzLoop comesmuch closer to what the FCC's Synthesis el intends to accomplish than does <u>HM 5.3 Revised</u> . VzLoop and the Synthesis Model both start measurements of where distribution terminals are located and where those terminals are	Deleted: HM 5.3 Deleted: HM 5.3 Deleted: HM 5.3

locations that are several years old); (2) the assignment of terminals to SAIs reflects real -world
engineering and design considerations, rather than the workings of an abstract clustering algorithm;
and (3) VzLoop has specific information on the type of structure (e.g., buried or underground) that
would be used to connect locations within distributions areas.

	Exhibit TJT-6T Deleted: Exhibit No. (TJT-1T) ¶ Docket No. UT-023003 Docket No. UT-023003
	Formatted: Left
1	such occurrences, the requisite safeguards are only invoked before distances
2	are scaled by the strand distance. For example, when the dimensions of a
3	rectangular cluster would produce excessively long copper lengths, HM 5.3
4	Revised divides such clusters into two or four smaller clusters. In effect,
5	clusters that "pass" such tests before the strand distance adjustment applies
6	now "fail" the tests subsequent to the adjustment. As a result, the network
7	facilities designed by HM 5.3 Revised are faulty from an engineering
8	perspective. ¹¹⁴ In short, the expansion induced by the strand distance Deleted: By the same token, the compression of other clusters means that some clusters that are deemed to require DLC equipment prior to
9	adjustment seriously distort not only the outputs of the Model, but also the applying the strand distance adjustment would qualify for all-copper treatment afterwards (e.g., the
10	engineering rules the Model was intended to represent. ¹¹⁵ maximum loop length in the cluster would be less than the threshold). In fact, clusters whose loop lengths are

Evelie TIT OT

(.....

.

¹¹⁴ Although <u>HM 5.3 Revised</u> deploys DLC facilities in instances where copper lengths are excessive, this does not remedy the problem – copper distribution lengths can still exceed the maximum.

¹¹⁵ A similar flaw in the workings of the strand distance adjustment is illustrated by changing the distribution module (Column Q) so that the number of locations to which the Model builds loop plant matches the number of locations in the TNS database. As Mr. Dippon explains, <u>HM 5.3 Revised</u> compresses locations determined by TNS into a smaller number of "lots," which would intuitively seem to produce lower costs, because the effect of increasing lots would seem to be an increase in both the lengths of backbone and branch cables (because the decrease in lot size that accompanies the increase in the number of lots brings cables closer to the edge of the rectangular clusters) and a possible increase in the number of branches (smaller lots may mean that more "roads" are needed). In fact, the opposite is true – increasing the number of lots results in a decrease in loop cost from \$<u>8.50</u> to \$<u>8.37</u>. And increasing the number of lots causes a decrease in the number of DLC (fiberfed) lines, as well as decreases in the distribution and DLC investments per line, which are partially offset by an increase in feeder investment.

These anomalous results are a consequence of the strand distance constraint. When more branches are neede d, the proportion of distance accounted for by the typically smaller (in terms of number of pairs) branch cables increases. Therefore, the average cable cost per unit of distance decreases. And, because the strand-distance constraint causes the total distribution distance to be the same in the two scenarios, cable costs are lower when there are more lots.

The explanation for the decrease in DLC lines (and the concomitant decrease in DLC investment per line) is somewhat similar. The increase in the number of branches (as well as the increased length of branch and backbone cables before the strand distance constraint is imposed) means that the multiplier that either expands or shrinks the "grill" is smaller when there are more lots. This, in turn, reduces the maximum distance from the SAI. Therefore, there are clusters for which the maximum copper length is exceeded (and therefore fiber feeder is deployed) when the default number of lots is used, but the maximum distance is not exceeded and copper feeder is deployed when there are more lots (because the "grill" is smaller in area). The increase in feeder costs in these cases results from the fact that for a given number of loops, fiber cable is cheaper than copper cable.

outliers attached) account for about 12 percent of Verizon NW's lines. Deleted: and compression Deleted: HM 5.3

under the relevant thresholds for the provision of DLC (and do not have

Deleted: HM 5.3

	Deleted: 7.64	l
1	Deleted: 7.53	l

		Exhibit TJT-6T	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶
		Docket No. UT-023003	Formatted: Left
1	Į	4. INTEROFFICE FACILITIES	
•			Deleted: HM 5.3
2	Q.	PLEASE DESCRIBE <u>HM 5.3 REVISED</u> 'S APPROACH TO MODELING	
3	I	INTEROFFICE FACILITIES.	Delated IN 50
4	А.	HM 5.3 Revised produces unit costs for interoffice transport UNEs based on its	Deleted: HM 5.3
5		representation of the network components that link Verizon NW's end-office	
6		switches to each other, to tandem switches, and to interexchange carriers'	
7		("IXC") points -of-presence ("POPs"). The Model depicts 13 ring systems, one	Deleted: HM 5.3
8		for each of the tandems (or pseudo tandems) modeled by <u>HM 5.3 Revised</u> ¹¹⁶	
9	I	Each of these ring systems actually consists of several rings that are linked	
10		together, either because the tandem is part of multiple rings or by intrabuilding	
11		fiber links that join the remaining rings in the system. These rings can contain	
12		up to 16 nodes. ¹¹⁷	
13		HM 5.3 Revised purportedly designs "optimal" interoffice routes, which	Deleted: HM 5.3
14		are the product of a 35-page, undocumented Visual Basic program that	
15		supposedly is able to find the "least cost" configuration of interoffice rings. ¹¹⁸ As	
16		Mr. Murphy explains, the demand information used to determine these rings, as	
17		well as the engineering assumptions employed therein, are severely flawed. ¹¹⁹	Deleted: HM 5.3
18	Q.	WHAT FLAWS HAVE YOU IDENTIFIED REGARDING <u>HM 5.3 REVISED</u> 'S	Deleteu: TIM 3.3
19		APPROACH TO MODELING INTEROFFICE FACILITIES?	
	Blair	e Model considers the following wire centers as the tandem locations for the 13 ring systems: ne, Everett, Grayland, Kirkland, Mount Vernon, Naches, Palouse, Rockford, North Richland, comish, Seattle, and Wenatchee.	

Deleted: HM 5.3

79

¹¹⁷ The Model produces a total of 22 rings for the 99 wire centers modeled by HM 5.3 Revised.

		<u>Exhibit TJT-6T</u> Docket No. UT-023003	_ لر	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶ Formatted: Left
1	A.	Even if HM 5.3 Revised's approach to modeling interoffice facilities did not		Deleted: HM 5.3
2		suffer from the flaws Mr. Murphy identifies, it is far from clear that the		
3		undocumented program is producing meaningful results. The program		
4		purportedly decides which wire centers belong on which rings using an overly		
5		simplified sequential comparison of the cost of directly connecting an office to a		
6		tandem with the cost of adding it to a ring. The costs considered in this		
7		comparison depend on the input costs for fiber cable, support structure, and	G	Deleted: HM 5.3
8		electronics. In fact, <u>HM 5.3 Revised</u> 's method of determining "optimal"		Deleteu: FIM 5.5
9		interoffice SONET rings is very insensitive to the both the demand that it		
10		considers (i.e., traffic volumes entering or exiting a ring at each wire center) and		
11		the costs for fiber cable and electronics a result that calls into serious		
12		question what exactly is being "optimized."		
13		For example, I tested the impact on interoffice design of removing the		
14		effect of high-capacity loops, and concluded that they account for about two-	G	Deleted: HM 5.3
15		thirds of the demand <u>HM 5.3 Revised</u> assumes in designing and costing		Deleted: FIM 5.3
16		interoffice rings. As one would expect, this demand is not uniformly distributed.		
17		Rather, some of the smaller offices have little to no interoffice demand		
18		associated with high-capacity loops (and therefore, their interoffice demand with		
19		or without high-capacity loops are similar), while other offices have large	C.	
20		numbers of high-capacity loops. Consequently, both <u>HM 5.3 Revised</u> 's total		Deleted: HM 5.3

(...continued)

¹¹⁸ Dr. Mercer provides a high-level description of what the program purportedly does. See Mercer Supplemental Direct Testimony at RAM-4 (HM 5.3 Model Description) at pp. 66-71.



¹¹⁹ Murphy Reply Testimony at Section V.

				Exhibit TJT-6T	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶
				Docket No. UT-023003	Formatted: Left
1		interoffice demand and the d	istribution of that dema	and among individual wire	
2		centers are radically differen	t when high-capacity lo	oops are excluded. Despite	
3		the fact that such a change	would seem to call for a	a different arrangement of	Deleted: HM 5.3
4		"optimal" SONET rings, <u>HM</u>	5.3 Revised produces	absolutely identical rings,	Deleted. Third 0.5
5	I	regardless of whether high-c	apacity loops are pres	ent or not ¹²⁰	
6	Q.	WHAT ARE THE COST CO	NSEQUENCES OF TH	IE MODEL'S	
7		INSENSITIVITY TO MANY	ASPECTS OF RING D	ESIGN?	
8	А.	The extreme sensitivity of the	e unit costs of interoffic	ce facilities, which Mr.	
9		Murphy has identified, is the	result of: (1) the inser	sitivity of total ring costs to	
10		demand; and (2) the concom	nitant high sensitivity of	total demand to the	
11		essentially arbitrary input that	at includes from zero to	0 100 percent of non-	
12		switched demand when dete	rmining interoffice inve	estments. The following table	
13		illustrates this phenomenon.			
14			TABLE 9		
15		0%	50%	100%	
	a pr	contrast to the dubious nature of the oceeding before the FCC, Stephen T izon's model is capable of producing	interoffice facilities' location Furner, a witness represent reasonable results:	ns produced by <u>HM 5.3 Revised</u> , in ing AT&T/MCI, agreed that	Deleted: HM 5.3
	P. (Mr. [Francis J.] Murphy, at least in difficult it is to model a SONET net witness] was saying he thought I w very complex problem to do. That what is Verizon's current experien- because of the complexity, the nur mean, what Verizon has actually in implementation for SONET traffic e the Federal Communications Comm	work, and Mr. Gansert [Vei vas initially agreeing with hi t said, though, given that, I ce is in terms of trying to ex mber of nodes that they hav mplemented in their networ given the constraints that the	izon's engineering m, and I would say it's a think you have to look at valuate, at least in this area ve on their SONET I k is rational ney have.	

Before the Federal Communications Commission, CC Docket Nos. 00-218, -249, -251, *Hearing Transcript* (Nov. 29, 2001) at pp. 5630-32. Indeed, the FCC's Wireline Competition Bureau adopted Verizon's transport model instead of the model proffered by AT&T/MCI (which is substantially similar to <u>HM 5.3 Revised</u>'s module). See Virginia Arbitration Order at ¶¶ 503-08.

Deleted: HM 5.3

Exhibit TJT-6T Docket No. UT-023003 Deleted: Exhibit No. ___ (TJT-1T) ¶ Docket No. UT-023003¶

Formatted: Left

				*
	Total Investment	\$120 Million	\$152 Million	\$184 Million
	# of DS-3s	301	944	1,584
	Investment/DS-3	\$397 Thousand	\$162 Thousand	\$116 Thousand
1 2	The table show	vs that changing the us	ser-adjustable input "fra	action of high-
3	capacity loops	requiring interoffice tra	ansport" from 0 percent	to 50 percent
4	(default) to 100) percent causes a larg	ge difference in deman	d (measured in DS-

5 3s), but only a modest difference in cost. Indeed, changing this input from the

6 value of 100 percent that was assumed in previous versions of HM 5.3 causes

7 a large increase in unit investment (from \$116 thousand to \$162 thousand).

8 Q. DOES <u>HM 5.3 REVISED</u>'S APPROACH TO MODELING INTEROFFICE

Deleted: HM 5.3

9

FACILITIES PRODUCE MEANINGFUL RESULTS?

A. No. Given that the Model essentially guesses at the volume of demand that
 interoffice facilities need to accommodate (by invoking the input illustrated in

12 Table 9), and the fact that the resulting investment is extremely insensitive to

13 that arbitrary demand, the Model cannot be expected to produce meaningful

14 results. Indeed, the shaky foundations of <u>HM 5.3 Revised</u>'s interoffice

15 calculations produce results that defy common sense. In particular, despite the

16 expectation that high-capacity facilities such as DS-3s would be less costly on

17 interoffice facilities than as stand-alone loops to end-user customers, because

18 of the greater economies of scale in the former, <u>HM 5.3 Revised</u> produces

19 higher costs for interoffice DS-3 facilities than it does for stand-alone loops. For

20 the interoffice DS -3 facilities, the total cost is \$3,065, with about \$2,590

21 attributable to electronics and about \$475 to transmission facilities (i.e., fiber

Deleted: HM 5.3

Deleted: HM 5.3

Formatted: Left

cables and support structures). For DS-3 loops to end-users, the total cost is
 about \$653, with \$574 attributable to electronics and about \$80 to transmission
 facilities.¹²¹

4	These anomalous results are not surprising, and indeed are consistent
5	with the erroneous results produced by previous versions of the HAI Model. In
6	fact, while some version of the HAI Model's switching and interoffice module
7	has been available since 1998, getting it to produce the proper amounts of
8	interoffice facilities has been a particularly vexing problem. The seriousness of
9	the problem first became apparent in the New York UNE proceeding. Verizon's
10	panel explained that the HAI Model failed to properly include substantial
11	amounts of interoffice equipment, thereby causing AT&T/WorldCom to submit
12	two corrected versions of the switching and interoffice module during the course
13	of the proceeding. ¹²² After the New York proceeding, the module was modified
14	at least once (e.g., the module included in HM 5.2a and filed in 2001 in a
15	Massachusetts proceeding differed from the version filed in New York). In the
16	ongoing SBC California UNE proceeding, I uncovered additional errors in HM

¹²¹Mr. Murphy has identified some serious design flaws associated with <u>HM 5.3 Revised</u>'s assumptions regarding the engineering of DS -3 loops, which ultimately result in DS-3 loops that would be nonfunctional in the real world.

Deleted: HM 5.3

¹²² The inclusion of improperly excluded equipment would obviously increase total investment. AT&T/WorldCom reduced the impact of the greater amounts of equipment by simultaneously changing the input prices for interoffice electronic components. In ultimately rejecting the Model, the New York Commission appeared to take notice of such corrections: "But when all is said and done, the recurring corrections to the Model seem to confirm its weaknesses more than its suppleness, and the Model continues to suffer from the flaws identified by the Commission in the First Elements Proceeding." Before the New York Public Service Commission, Case 98-C-1357, *Recommended Decision on Module 3 Issues by Administrative Law Judge Joel A. Linsider*(May 16, 2001) at p. 34 ("Linsider Decision").

	Docket No. UT-023003	Docket No. UT-023003¶
		Formatted: Left
	5.3's interoffice calculations, which AT&T/MCI subsequently acknowledged. ¹²³	
	Correction of these errors increased interoffice electronics investments by at	
	least 50 percent. ¹²⁴	
	5. END-OFFICE SWITCHING	(
Q.	DOES <u>HM 5.3 REVISED</u> 'S SWITCHING COST FUNCTION ESTIMATE THE	Deleted: HM 5.3
	APPROPRIATE, FORWARD-LOOKING SWITCHING INVESTMENT?	
A.	No, it does not. HM 5.3 Revised's estimate of new switch costs assumes only	Deleted: HM 5.3
	new switches. Verizon NW's actual forward-looking costs, however, will be	
	largely for upgrades and growth additions.	
Q.	IS THE EXCLUSION OF THE COSTS OF UPGRADES AND GROWTH	Deleted: HM 5.3
	SWITCH ADDITIONS FROM HM 5.3 REVISED SIGNIFICANT?	
A.	Most definitely. Earlier versions of the HAI Model relied upon a 1995 McGraw-	
	Hill study, which indicated that add-on switch prices were about 50% higher	
	than new switch prices. The study explained that:	
	Once a switch supplier sells a new system, it has a nearly captive customer; a telecommunications company can only grow a switch by buying add-on lines from the manufacturer of a switch. Therefore, add-on lines are priced higher than lines on new systems and represent higher marginal sales. ¹²⁵	
	The McGraw-Hill Study showed that carriers actually spend about three times	

Deleted: HM 5.3

¹²⁴ The counterintuitive results described in the last paragraph indicate that merely correcting calculation errors is not sufficient to render HM 5.3 Revised's interoffice facilities' calculations reasonable.

		Exhibit TJT-6T Docket No. UT-023003	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶
		•	Formatted: Left
1		and noted that the "gap between additions and new installations will continue to	
2		increase as the installed base approaches 100% digitization. ³¹²⁶ As the 1995	
3		study anticipated, Verizon NW's forward-looking switch costs will be largely the	
4		cost of upgrades and growth switch additions Verizon NW has no plans of	
5		installing new local switches because it has achieved "100% digitization." Yet,	Deleted: HM 5.3
6		HM 5.3 Revised assumes away all costs of upgrades and growth switch	Deleted. Hivi 3.3
7		additions.	
8	Q.	ARE <u>HM 5.3 REVISED</u> 'S INPUT ASSUMPTIONS CONSISTENT WITH	Deleted: HM 5.3
9		RESPECT TO SWITCHING COSTS?	
10	A.	No. If the Commission wants to accept <u>HM 5.3 Revised</u> 's approach, and	Deleted: HM 5.3
11 11		assume that there is never any growth switching added or upgrades, it would	
12		need to revise a number of HM 5.3 Revised's input assumptions in ways that	Deleted: HM 5.3
13		would increase greatly the Model's cost estimates. For example, if Verizon NW	
14		actually installed switches with no plans to ever purchase additional lines, which	
15		is not realistic, then the switches would need substantial excess capacity	
16		much higher than assumed by <u>HM 5.3 Revised</u> . For example, if lines were	Deleted: HM 5.3
17		growing at 3 percent annually, and 6 percent capacity is needed for	
18		administrative fill, installing a switch with enough capacity for the 16-year life	
19		assumed by <u>HM 5.3 Revised</u> would require 70 percent initial spare capacity.	Deleted: HM 5.3
20		Because spare capacity would be substantially increased (on the order of 30	

(...continued)

¹²⁵ Northern Business Information, US Central Office Equipment Market – 1995, McGraw-Hill.
 ¹²⁶ Id. at p. 61.

		Exhibit TJT-6T Docket No. UT-023003	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶
			Formatted: Left
1		percent over the life of the switch), the initial investment and capital costs would	
2		also increase.	
3	Q.	ARE THERE ALTERNATIVE MODIFICATIONS THAT COULD	
4		ACCOMMODATE HM 5.3 REVISED'S UNREALISTIC SWITCHING	
5		ASSUMPTIONS?	
6	А.	Yes. Consistent with, HM 5.3 Revised's assumption that the network uses only	Deleted: HM 5.3
7		new equipment, each switch would have to be replaced every few years to	
8		allow for growth and technological advances in switching (e.g., GR-303	
9		interfaces). Accordingly, the depreciation on switches would have to be much	
10		higher because the life of the switch would be substantially shorter than	
11		assumed by HM 5.3 Revised. This would obviously increase the initial	Deleted: HM 5.3
12		investment and the subsequent capital costs by significant amounts. Replacing	
13		a switch every 3 years, rather than every 16 years, implies that depreciation is	
14		more than 5 times higher per year. This also increases annual switch costs by	
15		substantial amounts the annual charge factor for a 3-year life is about 3.3	
16		times the corresponding factor for a 16-year life.	Deleted: HM 5.3
17		The only other alternative, under <u>HM 5.3 Revised</u> 's assumption that	
18		growth switch costs are never incurred, would be to install a new, smaller switch	
19		every time Verizon NW experienced enough growth to exhaust existing switch	
20		capacity. At a growth rate of about 3 percent per year, a switch initially installed	Deleted: HM 5.3
21		at,HM 5.3 Revised's assumed utilization would need to be augmented with a	Deleteu. Hivi 0.5
22		new, smaller switch at the same location in about 3 years. Adding new	
23		switches every 3 years to serve line growth and maintain an assumed	

I			Deleted: Exhibit No (TJT-1T) ¶
		Docket No. UT-023003	Docket No. UT-023003¶
		€	Formatted: Left
1		administrative fill of 94 percent would also increase the cost per-line	
2		substantially, even using the seriously understated costs for new switches in	Deleted: HM 5.3
3		HM 5.3 Revised	Deleted. This 3.5
4		Of course, the need for floor space, the costs for interconnections	
5		between the additional switches, as well as the costs of disrupting the central	
6		office, should also be included. In addition, HM 5.3 Revised's inputs are	Deleted: HM 5.3
7		inappropriate because, if Verizon NW only deployed new switches and never	
8		added growth lines, the manufacturers' discounts would be much smaller (and	
9		thus prices would be higher) for new lines. If switch manufacturers could not	
10		count on the higher margins they currently receive for growth lines, they would	
11		be unwilling to accept the low margins currently earned on initial installations.	Deleted: HM 5.3
12	Q.	DOES <u>HM 5.3 REVISED</u> INCORPORATE THE FCC'S SWITCH COST	Deleted. FIM 3.5
13		COMPUTATION? ¹²⁷	
14	А.	No. <u>HM 5.3 Revised</u> reduces switching costs when DLC lines are deployed; the	Deleted: HM 5.3
15		FCC's Synthesis Model does not. The result is a reduction in end-office	
16		switching investment by about 13 percent.	
17	VIII.	EXPENSES	
18	Q.	PLEASE DESCRIBE HM 5.3 REVISED'S EXPENSE MODULE.	Deleted: HM 5.3
19	Α.	As previously discussed, the assorted components of <u>HM 5.3 Revised</u> estimate	Deleted: HM 5.3
20		the investment required for various network facilities (e.g., the cable and wire	

¹²⁷ Indeed, the FCC's Wireline Competition Bureau selected Verizon's SCIS model over the switching model used in the HAI Model, citing SCIS's superior treatment of discounts offered by vendors and the fact that the data used to e stimate switch investments (which <u>HM 5.3 Revised</u> has adopted in this proceeding) are dated. See Virginia Arbitration Order at ¶¶ 367-73.

I

Deleted: HM 5.3

	<u>Exhibit TJT-6T</u> Docket No. UT-023003	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶
	•	Formatted: Left
1	needed for loop facilities, the number and type of switches to be modeled, and	
2	the amount of electronics needed for fiber optic facilities). And, as described	
3	more fully below, the Model also produces estimates of: (1) investments for	
4	support assets, such as buildings and motor vehicles, (2) annual capital costs	
5	associated with network and support investments, (3) annual operating and	
6	maintenance expenses for the network and support facilities, and (4) annual	
7	network operations and corporate overhead expenses.	
8	Cost estimates for each of these four categories start with the	Deleted: HM 5.3
9	investments in network facilities produced by <u>HM 5.3 Revised</u> (i.e., they are all	Deleted: HIVI 5.5
10	multiples of the network investment levels). For example, general support	
11	investments apply the ratio of the ARMIS (booked) investment a particular	
12	general support category (e.g., buildings not used for switches) to investment	
13	in ARMIS total plant in service ("TPIS"), less general support investment. Thus,	Deleted: HM 5.3
14	if building investment is five percent of TPIS in the ARMIS data, HM 5.3	Deleted. This 0.0
15	Revised assumes that building investment would be the same five percent of	Deleted: HM 5.3
16	the investment in network facilities produced by the Model. ¹²⁸ Because "HM 5.3	Deleted. Third 3.5
17	Revised produces substantially less investment than Verizon NW's book	
18	I investment, it in effect assumes that an "efficient carrier" could serve the same	
l	¹²⁸ HM 5.3 Revised assumes that a portion of support assets are assigned to retail services (and	Deleted: HM 5.3

Deleted: HM 5.3

²⁸ HM 5.3 Revised assumes that a portion of support assets are assigned to retail services (and therefore are not included in UNE costs). For buildings, furniture, office equipment, and general purpose computers, the Model first assigns corporate operations expenses to wholesale and retail, based on the proportion of total expenses for plant (less general support), network operations, and customer operations (ARMIS Report/Account 6600)that are in the customer operations account. HM 5.3 Revised then calculates an allocator for general support costs that is the ratio of the sum of network operations expenses and the corporate operations expenses assigned to wholesale, to the sum of network operations, customer operations, and corporate operations. That calculation results in an allocation of about 42 percent of these assets to wholesale. A somewhat different calculation results in an allocator of about 41 percent for motor vehicles and work equipment.

		Exhibit TJT-6T Docket No. UT-023003	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶
			Formatted: Left
1		volumes of traffic Verizon NW serves today with fewer (or smaller) buildings,	
2		fewer motor vehicles, less investment in computers, and so forth, as shown in	
3		Tables 2A and 2B above. AT&T/MCI have produced no support for this	
4		arbitrary and questionable outcome.	
5		In addition, the ratio of the book investment of a support asset to the total	
6		network investment should not be applied to the lower levels of forward-looking	Deleted: HM 5.3
7		investment produced by HM 5.3 Revised, because there is no basis for	Deleted. Tim 0.0
8	I	assuming that the level of support assets varies directly with the level of	
9		network investment. For example, the price of central office switches has	Deleted: HM 5.3
10		declined over time (although not as much as the <u>HM 5.3 Revised</u> suggests), but	Deleted: HM 5.3
11	I	the cost of land and buildings has not. Therefore, any land and building ratio	
12		based on book cost would be too low for calculating forward-looking costs if the	
13		ratio is applied to discounted, forward-looking switch investments. Such	
14		erroneous assumptions underestimate the required investment in land and	
15		buildings. In fact, the average ratio of support assets to network assets based	
16		on current costs is 25 percent higher than the average ratio based on book	
17		costs. ¹²⁹	
18	Q.	DOES <u>HM 5.3 REVISED</u> ACCURATELY ESTIMATE NETWORK	Deleted: HM 5.3
19	l	OPERATIONS EXPENSES?	
20	Α.	Absolutely not. <u>HM 5.3 Revised's approach to estimating network operations</u>	Deleted: HM 5.3
21		expenses (ARMIS Account 6530) is similarly flawed. HM 5.3 Revised	Deleted: HM 5.3
	I		

¹²⁹ This calculation uses the current cost to book cost ratios reported in Appendix D of the FCC's Tenth Report and Order.

		Exhibit TJT-6T Docket No. UT-023003
		• Formatted: Left
1		multiplies: (1) the ratio of book expenses in this account to total current
2		investment, by (2) the total investment produced by the Model, to estimate HM
3		5.3 Revised's network operations expenses. As discussed herein, because HM
4		5.3 Revised's investments are understated, network operations expenses are
5		understated as well. Even if a forward-looking network required less
6		investment, there is no logical reason to assume that a reduction in these
7		investments automatically implies that an efficient firm could proportionately
8		reduce its expenditures for power, network engineering, and the like.
9	Q.	PLEASE DESCRIBE HM 5.3 REVISED'S USE OF EXPENSE-TO-
10		INVESTMENT RATIOS, AND THE PROBLEMS ASSOCIATED THEREWITH.
11 12	Α.	With the exception of the annual capital costs, ¹³⁰ the specific factors used to produce JHM 5.3 Revised's cost estimates are adapted from the FCC Synthesis
13		Model. These factors include expense to investment ratios for specific plant
14		categories (e.g., aerial copper cable), and each category of support asset (e.g.,
15		buildings). In order to produce reliable estimates of forward-looking expenses,
16		such expense-to-investment factors must be developed such that they
17		represent the proper relationship between the forward-looking level of network
18		expense and the forward-looking level of network investment.
19		As described more fully below, a fundamental problem arises when
20		these expense to-investment ratios are used to estimate the forward-looking
	¹³⁰ Th	e Direct and Reply Testimonies of Mr. Sovereign and Dr. Vander Weide demonstrate that

³⁰ The Direct and Reply Testimonies of Mr. Sovereign and Dr. Vander Weide demonstrate that AT&T/MCI's recommendations for cost of capital and depreciation produce unreasonably low UNE cost estimates.

		Exhibit TJT-6T Deleted: Exhibit No. (TJT-1T) ¶ Docket No. UT-023003
		Formatted: Left
1		expenses associated with providing UNEs in Washington. Unless there is a
2		close match between the investment levels used to develop the ratios and the
3		investment levels to which the ratios are applied in the cost studies, the
4		application of such ratios, without appropriate forward-looking adjustments,131
5		will not produce accurate UNE cost estimates. ¹³²
6	Q.	PLEASE EXPLAIN WHY IT IS IMPORTANT TO ALIGN THE PRICES USED
7		TO CALCULATE FORWARD-LOOKING INVESTMENT AND FORWARD-
8		LOOKING PRICES.
9	Α.	Adjustments to expense-to-investment ratios based on booked network
10		investment are necessary to make them appropriate for estimating forward-
11		looking expenses, as the following example illustrates. Suppose a carrier
12		installed ten new poles last year for \$500 each and paid \$5 per year to maintain
13		each pole. Further, suppose the price of a new pole this year is \$600, but still it
14		costs \$5 per year to maintain. In this example, then the current cost to book
15		cost ("CC/BC") ratio for poles is \$600/\$500 or 6/5. Application of the CC/BC
16		ratio to the booked investment in the denominator of the ratio \$5/\$500 (.01)
17		yields a new factor of .0083. Because <u>HM 5.3 Revised</u> in many cases

Deleted: HM 5.3

Deleted: HM 5.3

¹³¹ For example, in the case of switching, there is a clear misalignment in <u>HM 5.3 Revise</u>	d while the
FCC's current cost-to-book cost ratio implies that Verizon NW would need to spend 89	percent of its
book investment to replace its switches, HM 5.3 Revised says the replaceme	nt could be
accomplished for only 23 percent.	

I

¹³² VzCost applies a Forward -Looking Calibration ("FLC") factor to ensure that the investment levels of the network expense factors are properly aligned with the reduced level of forward -looking investment produced by the other parts of Verizon's cost model. See Before he Washington Utilities and Transportation Commission, Docket No. UT-023003, Panel Testimony of Verizon Northwest Inc. on Recurring Costs (June 26, 2003) at pp. 150-55.

	Exhibit TJT-6T Docket No. UT-023003	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶
	Docket No. 01-023003	Formatted: Left
1	erroneously assumes that prices are less in the future, ¹³³ applying this factor to	
2	the a lower pole price of, for example, \$400 produces incorrectly low	
3	maintenance expense of \$3.33 per pole.	
4	A similar problem arises if <u>HM 5.3 Revised</u> produces an incorrect	Deleted: HM 5.3
5	estimate of the quantity of facilities required by a carrier providing	
6	telecommunications services. For example, if Verizon NW's real-world	
7	operations require 100 poles, but <u>HM 5.3 Revised</u> produces only 80 poles, the	Deleted: HM 5.3
8	assumption of the \$400 pole price would produce a hypothetical investment of	
9	\$32,000 (80 x \$400), and an associated maintenance expense of \$267 (0.0083	
10	x \$32,000), while the real-world maintenance cost would be \$500 (100 poles x	
11	\$5 per pole as described above). In the case of plant-specific expenses, the	
12	costs of maintaining the network are reduced to only 50 percent of what Verizon	
13	NW spent to maintain its network in 2003.	
14	Finally, there is the additional problem that the FCC's expense-to-	
15	investment ratios are national averages, estimated from historical 1997 and	
16	1998 data. ¹³⁴ As such, the use of these ratios fails to capture Washington-	
17	specific or Verizon NW-specific operating conditions. ¹³⁵ The FCC used	
18	aggregate data for ILECs, but explicitly acknowledged that a national average	
	¹³³ Pole investment is a prime example of this understatement: When the pole investment in the 2003 ARMIS data is adjusted by the current cost-to-book cost ratio and then divided by the number of poles reported in the ARMIS data, the price is <u>three times HM 5.3 Revised</u> 's pole price. Therefore, even if	Deleted: twice
	HM 5.3 Revised produced the correct number of poles and an accurate network expense factor was	Deleted: HM 5.3
	used, the associated maintenance expenses would still be understated by two thirds.	Deleted: HM 5.3

¹³⁴ In contrast to AT&T/MCI's ratios that are based on data that are now five to six years out-of-date, Verizon NW uses data from 2001 and makes them forward looking through the application of inflation and productivity adjustments.

Н	Deleted: twice
H	Deleted: HM 5.3
Υ	Deleted: HM 5.3
Υ	Deleted: one-half

		<u>Exhibit TJT-6T</u> Docket No. UT-023003	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶ Formatted: Left
1		was appropriate for USF purposes only. ¹³⁶ Similarly, although the FCC used	
2		data that was based on the prices ILECs pay for equipment, the FCC used	
3		nationwide estimates of input costs to calculate the value of current investment.	
4		Thus, the expense factors used by AT&T/MCI for UNE purposes fail to align	
5		properly with the equipment price inputs used for their Verizon NW,	
6		Washington-specific cost study.	Deleted: HM 5.3
7	Q.	DESCRIBE HM 5.3 REVISED'S APPROACH TO ESTIMATING CORPORATE	Deleteu: mil 5.5
8		OVERHEAD EXPENSES, AND THE PROBLEMS ASSOCIATED	
9		THEREWITH.	
10	A.	To estimate corporate overhead expenses, <u>HM 5.3 Revised</u> applies an	Deleted: HM 5.3
11		overhead factor of 10.4 percent to all the other costs calculated by the Model.	
12		The results of this calculation are that, while Verizon NW incurred corporate	
13		expenses (USOA Accounts 6710 and 6720) of about \$88 million in 2003, $^{\rm 137}$ the	Deleted: less than
14		Model produces about one quarter of that amount (or \$22 million).	Deleted: 1
15		The large reduction from Verizon NW's current expenditures results from	Deleted: HM 5.3
16		the fact that HM 5.3 Revised applies a ratio of 10.4 percent for corporate	Deleted. TINI 3.5

(...continued)

¹³⁷ This figure is the product of 2003 ARMIS expenses and <u>HM 5.3 Revised</u>'s estimate of the proportion of corporate expenses that correspond to the "wholesale" activities depicted by the Model.

Deleted: HM 5.3

 $^{^{\}rm 135}$ Virginia Arbitration Order at \P 136.

¹³⁶ The FCC distinguished between the use of its Synthesis Model to support the federal USF and its use for other purposes. In a USF context, the FCC did not attempt to describe any particular company (Tenth Report and Order at ¶ 360), whereas in a UNE context, the objective is to estimate the costs an ILEC actually expects to incur.

	Exhibit TJT-6T Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003 Docket No. UT-023003¶ Formatted: Left
1	expenses to all of its other substantially understated forward-looking costs. ¹³⁸
2	As Table 2B shows, those estimates are well below what Verizon NW needs to
3	run its current network. And the resulting overhead cost estimates, likewise,
4	understate forward-looking overhead expenses. This illustrates the general
5	problem with expense factors if hypothetically the cost of all network
6	components were reduced by 50 percent, there is no reason to expect, for
7	example, that only half of the current professional workforce would be required
8	to manage that network.
9 IX. 10	REGULATORY SCRUTINY AND HM 5.3 REVISED'S TREATMENT OF THE Deleted: HM 5.3 CONCERNS VOICED BY OTHER STATE REGULATORY COMMISSIONS
10 11	CONCERNS VOICED BY OTHER STATE REGULATORY COMMISSIONS
10 11 12 Q .	CONCERNS VOICED BY OTHER STATE REGULATORY COMMISSIONS WHAT WEIGHT SHOULD BE PLACED ON DR. MERCER'S STATEMENT
10 11 12 Q 13	CONCERNS VOICED BY OTHER STATE REGULATORY COMMISSIONS WHAT WEIGHT SHOULD BE PLACED ON DR. MERCER'S STATEMENT THAT THE HAI MODEL HAS BENEFITED FROM CAREFUL REGULATORY
10 11 12 Q 13 14	CONCERNS VOICED BY OTHER STATE REGULATORY COMMISSIONS WHAT WEIGHT SHOULD BE PLACED ON DR. MERCER'S STATEMENT THAT THE HAI MODEL HAS BENEFITED FROM CAREFUL REGULATORY SCRUTINY? ¹³⁹
10 11 12 Q 13 14 15 A .	CONCERNS VOICED BY OTHER STATE REGULATORY COMMISSIONS WHAT WEIGHT SHOULD BE PLACED ON DR. MERCER'S STATEMENT THAT THE HAI MODEL HAS BENEFITED FROM CAREFUL REGULATORY SCRUTINY? ¹³⁹ None. While it is accurate to state that the HAI Model has been filed in many
10 11 12 Q 13 14 15 A 16	CONCERNS VOICED BY OTHER STATE REGULATORY COMMISSIONS WHAT WEIGHT SHOULD BE PLACED ON DR. MERCER'S STATEMENT THAT THE HAI MODEL HAS BENEFITED FROM CAREFUL REGULATORY SCRUTINY? ¹³⁹ None. While it is accurate to state that the HAI Model has been filed in many states and has been extensively reviewed, such reviews have often resulted in

20 New York, New Jersey, and Massachusetts have all found that the versions of

¹³⁸ VzCost applies a 4.8% Marketing factor, a 3.6% Marketing Support factor, and a 6.3% Common factor to recover overhead expenses.

 $^{^{\}rm 139}\,\rm Mercer$ Supplemental Direct Testimony at pp. 6 -7.

Formatted: Left

1	the HAI Model sponsored by AT&T/MCI are problematic nevertheless, and have
2	adopted the ILECs' cost models instead. ¹⁴⁰
3	For example, a Recommended Decision released by the New York
4	Public Service Commission selected Verizon's cost model over the HAI Model,
5	Release 5.2, describing the latter as "a ponderous tool that is too far removed
6	from the reality of Verizon's circumstances to be used when there is an
7	alternative better grounded in real data."141 Similarly, in adopting Verizon's cost
8	model, the New Jersey Board concurred with Verizon NJ and others that the
9	HAI Model "failed to use TELRIC-compliant inputs."142 Chief among the New
10	Jersey Board's concerns was "the substantial nature of the difference between
11	the [HAI Model's] cost estimates and Verizon NJ's actual experience," which
12	suggested that the HAI Model "may potentially understate forward-looking
13	costs."143 Moreover, the New Jersey Board was troubled by AT&T's offsetting
14	adjustments and "alarmed" by the anomalous results produced by the HAI
15	Model's clustering algorithm. ¹⁴⁴ In the end, the New Jersey Board declined to
16	adopt the HAI Model, noting that the "Model employs a methodology designed

¹⁴⁰ I appeared as a witness in each of these proceedings, as well as in several universal service proceedings in 1998. With the exception of Kentucky, which selected HM 5.0a for universal service purposes, the regulators in each of these states rejected the HAI Model and opted instead for the cost models sponsored by the ILECs.

¹⁴¹ Linsider Decision at p. 35. Judge Linsider's decision was subsequently affirmed by the New York Commission, which noted that "none of [the parties, including AT&T] excepts to the Judge's rejection of the HAI Model." Before the New York Public Service Commission, Case 98 -C-1357, Order on Unbundled Network Element Rates (Jan. 28, 2002) at pp. 14-15, 17.

¹⁴² New Jersey Order at p. 25.

¹⁴³ New Jersey Order at pp. 25-26.

¹⁴⁴ New Jersey Order at p. 26.

		Exhibit TJT-6T Docket No. UT-023003	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶
			Formatted: Left
1		to create a least-cost, most efficient network without regard to realistic design	
2		considerations." ¹⁴⁵	
3 G	Q .	HAVE ALL OF THE PROBLEMS IDENTIFIED BY THE COMMISSION WITH	
4		RESPECT TO PREVIOUS VERSIONS OF THE HAI MODEL BEEN	
5		REMEDIED?	
6 A	۹.	No. While the proposition that <u>HM 5.3 Revised</u> should rise or fall on its own	Deleted: HM 5.3
7		merits is reasonable, it is also the case that a number of the problems that this	
8		Commission found with HM 3.1 and HM 5.0a still remain.	
9 C	Q .	PLEASE DESCRIBE THESE PROBLEMS.	Deleted: HM 5.3
10 🛛	۹.	In particular, HM 5.3 Revised fails to address two major concerns the	
11		Commission has raised in earlier decisions: (1) problems with particular inputs,	
12		such as placement costs, drop lengths, and switch investments, 146 and (2) the	
13		need validate certain model outputs, such as loop lengths. ¹⁴⁷ With regard to the	
14		former, I note that a large number of outside plant and other inputs are the	
15		same as the HM 5.0a values about which the Commission previously	
16		expressed concern in general, in contrast to the inputs used in VzLoop, HM	Deleted: HM 5.3
17		5.3 Revised's inputs are the result of Mr. Donovan's opinions, and have no	
18		basis whatsoever in what a real-world carrier can expect to pay for such inputs	
19		in Washington.	

¹⁴⁵ New Jersey Order at p. 27.

¹⁴⁶ 1998 Eighth Supp. Order at ¶¶ 93, 134, 285.

¹⁴⁷ Tenth SupplementalOrder at ¶ 271.

	Exhibit TJT-6T Docket No. UT-023003	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶
		Formatted: Left
1	With regard to validation, Dr. Mercer has not presented the types of	
2	comparisons to actual data (e.g., loop lengths) that the Commission suggested	
3	in earlier orders. This omission is not surprising given that, as demonstrated	
4	herein, such comparisons only serve to demonstrate the imprecise nature of	
5	HM 5.3 Revised	Deleted: HM 5.3
6 Q .	PLEASE EXPLAIN.	
7 A.	A revealing test is to compare the average loop lengths for each wire center	
8	produced by the model to corresponding external measures of average loop	
9	length. For the latter, I used the average loop lengths that Mr. Spinks used in	
10	his modified version of <u>HM 5.3 Revised</u> . In particular, I calculated the absolute	Deleted: HM 5.3
11	percentage deviation between the HM 5.3 Revised loop length and Mr. Spinks'	Deleted: HM 5.3
12	loop length for each wire center. For HM 5.3 Revised, these percentages	Deleted: HM 5.3
13	averaged 61 percent, ranging from 0 percent to 635 percent. In contrast, when	Deleted: 57 Deleted: 1
14	I performed the same test on VzLoop loop lengths, the average deviation was	
15	only 15 percent, ranging from 0 percent to 108 percent.	
16 Q .	IS MR. SPINKS' ADJUSTMENTS TO <u>HM 5.3 REVISED</u> 'S COSTS, WHICH	Deleted: HM 5.3
17	ARE BASED ON "TRUING UP" ,HM 5.3 REVISED'S LOOP LENGTHS TO	Deleted: HM 5.3
18	THESE EXTERNAL MEASURES, A RELIABLE WAY TO ESTIMATE UNE	
19	COSTS?	
		Deleted: HM 5.3
20 A .	No. As I described earlier, not only does <u>HM 5.3 Revised</u> produce imprecise	
21	loop lengths, it tends to place the wrong types of facilities (e.g., cables of a	
22	particular size) in the wrong places. Consequently, a mere "true up" of	
23	distances will not guarantee that the cost outputs are reliable.	

		Exhibit TJT-6T	Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003¶
		Docket No. UT-023003	Formatted: Left
1	X .	MAJOR COST CATEGORIES IN <u>HM 5.3 REVISED</u>	Deleted: HM 5.3
2 3	Q.	PLEASE IDENTIFY THE MAJOR CATEGORIES OF LOOP INVESTMENT.	
4	Α.	Valid estimates of economic costs require that a cost model's inputs comport	
5		with the costs and operating conditions Verizon NW experiences. An	
6		informative way to identify the most critical inputs is to determine proportions of	
7		total investment (e.g., ordinary loops) accounted for by specific types of	
8		facilities. In selecting the inputs that ultimately result in total investment, Mr.	
9		Donovan generally has not relied upon data specific to Verizon NW, but rather	
10		has used his own unverified judgment to substantiate a substantial number of	Deleted: HM 5.3
11		HM 5.3 Revised's inputs and investments (e.g., engineering and placement of	Deleted: HIVI 5.3
12	I	cable, support structures, DLC engineering and installation, etc.). In contrast,	
13		the corresponding inputs to VzLoop are based on Verizon NW's recent	
14		experience providing service in Washington (e.g., vendor contracts and the	
15		like). The identification of the critical investment categories below highlights the	Deleted: HM 5.3
16		extent to which <u>HM 5.3 Revised</u> 's costs depend on Mr. Donovan's	Deleted: FIW 5.5
17	I	unsubstantiated opinions, as opposed to any realistic and accurate measure of	
18		the actual costs Verizon NW expects to incur when building and operating its	
19		network.	Deleted: HM 5.3 Deleted: 23.32
20		TABLE 10	Deleted: 5.77%
21	I		Deleted: 10.63%
	I	HM 5.3 Revised VzLoop	Deleted: 84.51

	Investment/	Line% of tota	I Investment/	Line% of total	
Poles	\$26.57	5.93%	\$46.75	4.21%	
Aerial	\$54.27	12.12%	\$70.65	6.36%	
Buried	\$ <u>105.66</u>	23.59%	\$187.81	16.91%	
Undergrou	ind\$13.44	.3.00%	\$49.03	4.42%	//
Conduit	\$44.53	9.94%	\$283.69	25.55%	
DLC	\$ <u>120.29</u>	26.86%	\$301.18	27.12%	

 Deleted: 23.32

 Deleted: 23.32

 Deleted: 5.77%

 Deleted: 43.00

 Deleted: 43.00

 Deleted: 20.89%

 Deleted: 12.62

 Deleted: 3.12%

 Deleted: 9.93%

 Deleted: 117.77

 Deleted: 29.12%

I						"Exhibit TJT-6T		Deleted: Exhibit No (TJT-1T) ¶
						Docket No. UT-023003		Docket No. UT-023003¶
							4	- Formatted: Left
-		- • •						
1		Equipm ent SAI	\$ 8.74	_1.95%	\$17.13	1.54%		Deleted: 8.74
I		Drop	₽ <u>0.74</u>	<u>_1.9070</u>	φ17.13	1.54 /0	<	Deleted: 2.16%
		Terminal	\$ 43.06	.9.61%	\$40.27	3.63%		Deleted: 43.06
		Drop Wire	\$ <u>13.64</u>	.3.05%	\$73.14	6.59%	~	Deleted: 10.65%
ļ		NID	\$ <u>17.64</u>	. <u>3.94%</u>	\$40.83	3.68%	1,	Deleted: 13.64
1		Total	\$ 447.84		\$1,110.48			Deleted: 3.37%
1		, ota	¥ <u></u>		ψ1,110110		7/)	Deleted: 17.64
2		This table shows th	at, in each m	odel, the cos	sts for cable	and structure account		Deleted: 4.36%
-								Deleted: 404.44
3		for about one-half of	of the total inv	estment; and	d DLC equip	oment accounts for		
4		annrovimately one	auarter of the	total investr	ment ¹⁴⁸ Fu	rther,_HM 5.3 Revised's	/	Deleted: HM 5.3
4		approximately one			nent. Tu			
5		investments are ge	nerally about	one half Vzl	Loop's inves	stment levels across the		
		-						
6		board. While a pro	per cost stud	y requires ac	ccurate mea	surement of all cost		
7		innute it is assentio	al to develop :	accurate cos	t ostimatos	for the more critical		
'					e estimates			Deleted: HM 5.3
8		inputs. <mark>HM 5.3 Re</mark>	<mark>vised</mark> fails mis	serably in thi	s regard.		/	
9	XI.	CONCLUSIONS						
10	Q.	PLEASE SUMMAR	RIZE YOUR C	ONCLUSIO	NS.			
1	_						/	Deleted: HM 5.3
11	Α.	HM 5.3 Revised sh	ould not be u	sed to set U	NE rates for	Verizon NW in		
12		Washington. The M	Model does no	ot comply wi	th proper fo	rward-looking cost		
13		methodologies (inc	luding those of	called for by	TELRIC), fa	ails the validation tests		
14		to which it is subject	ted, and is ba	ased on an i	ncorrect rep	resentation of the		
15		economics and ope	erations of loc	al exchange	networks.	Numerous errors are		(
16		also built into the H	IM 5.3 Revise	d's estimatir	ng methodol	ogies and input		Deleted: HM 5.3
17		assumptions, result	ting in incredi	bly understa	ted forward	looking costs of the		
		• *	÷	-		-		

¹⁴⁸ Of course, total investment also depends on the quantities of each component. As I discussed earlier, <u>HM 5.3 Revised</u> generally produces insufficient (or imprecise) quantities of loop facilities as well.

Deleted: HM 5.3

		Exhibit TJT-6T Deleted: Exhibit No (TJT-1T) ¶ Docket No. UT-023003
		Formatted: Left
1		network required to provide reliable service in Verizon NW's Washington
2		territory.
3		In particular, HM 5.3 Revised assumes that service could be provided in
4	ļ	Washington for only 30 percent of Verizon NW's current investment levels, and
5		that Verizon NW's network could be operated with little more than one-half of
6	l	the out-of-pocket expenses (and one-half the labor force) currently experienced.
7		Similarly, Mr. Donovan's ill-advised engineering and installation labor estimates
8		have the incredible implication that an entire network serving all of Verizon
9		NW's 1.1 million lines could be completely installed in one year by a labor force
10		of <u>fewer than 900</u> workers. Deleted: ittle over Deleted: 800
11		For the foregoing reasons, and others discussed in the testimonies of
12		Messrs. Dippon, Richter, and Murphy, the Commission should not rely upon, HM
13		5.3 Revised, to any extent, to establish Verizon NW's UNE rates.
14	Q.	DOES THIS CONCLUDE YOUR REPLY TESTIMONY?
15	Α.	Yes.

Page i: [1] Formatted Right	Rachael Cotner	6/18/2004 11:15:00 AM
Page 37: [2] Deleted	Timothy Tardiff	6/17/2004 6:49:00 PM
HM 5.3		
Page 37: [2] Deleted HM 5.3	Timothy Tardiff	6/17/2004 6:49:00 PM
Page 37: [2] Deleted HM 5.3	Timothy Tardiff	6/17/2004 6:49:00 PM
Page 37: [3] Deleted	trung.lu	6/13/2004 4:00:00 PM
5	5	2,504
Page 37: [3] Deleted	trung.lu	6/13/2004 4:01:00 PM
		43.34
Page 37: [3] Deleted	trung.lu	6/13/2004 4:02:00 PM
		40.72
Page 37: [4] Deleted	trung.lu	6/13/2004 4:05:00 PM 4,398
Page 37: [4] Deleted	trung.lu	6/13/2004 4:06:00 PM
5	5	16.37
Page 37: [4] Deleted	trung.lu	6/13/2004 4:06:00 PM
		15.38
Page 37: [5] Deleted	trung.lu	6/13/2004 4:07:00 PM
		\$50,162
Page 37: [5] Deleted	trung.lu	6/13/2004 4:08:00 PM
		43.67%
Page 37: [5] Deleted	trung.lu	6/13/2004 4:08:00 PM
		28.62%
Page 37: [6] Deleted	trung.lu	6/13/2004 4:07:00 PM \$1,355
Page 37: [6] Deleted	trung.lu	6/13/2004 4:08:00 PM
		43.34%
Page 37: [6] Deleted	trung.lu	6/13/2004 4:08:00 PM
		28.40%
Page 37: [7] Deleted	trung.lu	6/13/2004 4:07:00 PM
		\$2,450
Page 37: [7] Deleted	trung.lu	6/13/2004 4:08:00 PM
		43.34%
Page 37: [7] Deleted	trung.lu	6/13/2004 4:08:00 PM 28.40%
Dama 27, [0] Dalatad	••••••• ••	
Page 37: [8] Deleted	trung.lu	6/13/2004 4:08:00 PM \$5,433
Page 37: [8] Deleted	trung.lu	6/13/2004 4:09:00 PM
rage 37. [o] Deleted	ti ung.iu	43.34%
Page 37: [8] Deleted	trung.lu	6/13/2004 4:09:00 PM
- <u></u>		28.40%
Page 37: [9] Deleted	trung.lu	6/13/2004 4:08:00 PM
		\$69,227

Page 37: [9] Deleted	trung.lu	6/13/2004 4:09:00 PM 39.04%
Page 37: [9] Deleted	trung.lu	6/13/2004 4:09:00 PM
		27.57%
Page 37: [10] Deleted	trung.lu	6/13/2004 4:09:00 PM
		\$117,087
Page 37: [10] Deleted	trung.lu	6/13/2004 4:10:00 PM 36
Page 37: [10] Deleted	trung.lu	6/13/2004 4 :10:00 PM 16
Page 37: [11] Deleted	trung.lu	6/13/2004 4:11:00 PM
		\$291,516
Page 37: [11] Deleted	trung.lu	6/13/2004 4:11:00 PM
		54.81
Page 37: [11] Deleted	trung.lu	6/13/2004 4:11:00 PM
		55.92
Page 37: [12] Deleted	trung.lu	6/13/2004 4:12:00 PM
		\$26,769
Page 37: [12] Deleted	trung.lu	6/13/2004 4:12:00 PM
		58.26%
Page 37: [12] Deleted	trung.lu	6/13/2004 4:12:00 PM
		24.26%
Page 37: [13] Deleted	trung.lu	6/13/2004 4:12:00 PM
		\$75,280
Page 37: [13] Deleted	trung.lu	6/13/2004 4:12:00 PM
		33.63%
Page 37: [13] Deleted	trung.lu	6/13/2004 4:12:00 PM
		22.76%
Page 37: [14] Deleted	trung.lu	6/13/2004 4:12:00 PM
		\$46,797
Page 37: [14] Deleted	trung.lu	6/13/2004 4:12:00 PM
		15.42%
Page 37: [14] Deleted	trung.lu	6/13/2004 4:12:00 PM
		10.32%
Page 37: [15] Deleted	trung.lu	6/13/2004 4:12:00 PM
		\$146,957
Page 37: [15] Deleted	trung.lu	6/13/2004 4:12:00 PM
		34.10%
Page 37: [15] Deleted	trung.lu	6/13/2004 4:12:00 PM
		25.40%
Page 37: [16] Deleted	trung.lu	6/13/2004 4:16:00 PM
		\$50,311
Page 37: [16] Deleted	trung.lu	6/13/2004 4:16:00 PM
		33.18%
Page 37: [16] Deleted	trung.lu	6/13/2004 4:16:00 PM

18.02%

		18.02 /
Page 37: [17] Deleted	trung.lu	6/13/2004 4:16:00 PM \$346,114
Page 37: [17] Deleted	trung.lu	6/13/2004 4:16:00 PM 29.94%
Page 37: [17] Deleted	trung.lu	6/13/2004 4:16:00 PM 20.12%
Page 37: [18] Deleted	trung.lu	6/13/2004 4:17:00 PM \$838,459
Page 37: [18] Deleted	trung.lu	6/13/2004 4:17:00 PM 35.09
Page 37: [18] Deleted	trung.lu	6/13/2004 4:17:00 PM 27.99
Page 62: [19] Deleted \$1.28	trung.lu	6/13/2004 5:47:00 PM
Page 62: [19] Deleted 84.2%	trung.lu	6/13/2004 5:47:00 PM
Page 62: [19] Deleted 97.1%	trung.lu	6/13/2004 5:47:00 PM
Page 62: [20] Deleted \$1.15	trung.lu	6/13/2004 5:47:00 PM
Page 62: [20] Deleted 85.7%	trung.lu	6/13/2004 5:47:00 PM
Page 62: [20] Deleted 97.0%	trung.lu	6/13/2004 5:47:00 PM
Page 62: [21] Deleted \$1.01	trung.lu	6/13/2004 5:47:00 PM
Page 62: [21] Deleted 87.3%	trung.lu	6/13/2004 5:47:00 PM
Page 62: [21] Deleted 96.8%	trung.lu	6/13/2004 5:47:00 PM
Page 62: [22] Deleted \$0.88	trung.lu	6/13/2004 5:47:00 PM
Page 62: [22] Deleted 88.9%	trung.lu	6/13/2004 5:47:00 PM
Page 62: [22] Deleted 96.6%	trung.lu	6/13/2004 5:47:00 PM
Page 62: [23] Deleted \$0.75	trung.lu	6/13/2004 5:47:00 PM
Page 62: [23] Deleted 89.2%	trung.lu	6/13/2004 5:47:00 PM
Page 62: [23] Deleted 96.1%	trung.lu	6/13/2004 5:47:00 PM
Page 62: [24] Deleted	trung.lu	6/13/2004 5:47:00 PM

¢Λ	G	1
ΦU	.0	1

ψ0.01		
Page 62: [24] Deleted 89.5%	trung.lu	6/13/2004 5:47:00 PM
Page 62: [24] Deleted 95.3%	trung.lu	6/13/2004 5:47:00 PM
Page 62: [25] Deleted \$0.54	trung.lu	6/13/2004 5:47:00 PM
Page 62: [25] Deleted 89.7%	trung.lu	6/13/2004 5:47:00 PM
Page 62: [25] Deleted 94.5%	trung.lu	6/13/2004 5:47:00 PM
Page 62: [26] Deleted \$0.48	trung.lu	6/13/2004 5:47:00 PM
Page 62: [26] Deleted 89.4%	trung.lu	6/13/2004 5:47:00 PM
Page 62: [26] Deleted 92.9%	trung.lu	6/13/2004 5:47:00 PM
Page 62: [27] Deleted \$0.43	trung.lu	6/13/2004 5:47:00 PM
Page 62: [27] Deleted 88.4%	trung.lu	6/13/2004 5:47:00 PM
Page 62: [27] Deleted 90.7%	trung.lu	6/13/2004 5:47:00 PM
Page 62: [28] Deleted \$0.39	trung.lu	6/13/2004 5:47:00 PM
Page 62: [28] Deleted 84.8%	trung.lu	6/13/2004 5:47:00 PM
Page 62: [28] Deleted 84.8%	trung.lu	6/13/2004 5:47:00 PM
Page 62: [29] Deleted \$0.37	trung.lu	6/13/2004 5:47:00 PM
Page 62: [29] Deleted 75.6%	trung.lu	6/13/2004 5:47:00 PM
Page 62: [29] Deleted 75.6%	trung.lu	6/13/2004 5:47:00 PM
Page 62: [30] Deleted \$0.35	trung.lu	6/13/2004 5:47:00 PM
Page 62: [30] Deleted 63.8%	trung.lu	6/13/2004 5:47:00 PM
Page 62: [30] Deleted 63.7%	trung.lu	6/13/2004 5:47:00 PM
Page 62: [31] Deleted \$0.35	trung.lu	6/13/2004 5:47:00 PM
Page 62: [31] Deleted	trung.lu	6/13/2004 5:47:00 PM

50.9%

Page 62: [31] Deleted	trung.lu	6/13/2004 5:47:00 PM
51.2%		
Page 62: [32] Deleted	trung.lu	6/13/2004 5:47:00 PM
\$0.35		
Page 62: [32] Deleted	trung.lu	6/13/2004 5:47:00 PM
40.4%		
Page 62: [32] Deleted	trung.lu	6/13/2004 5:47:00 PM
40.4%		
Page 62: [33] Deleted	trung.lu	6/13/2004 5:47:00 PM
\$0.34		
Page 62: [33] Deleted	trung.lu	6/13/2004 5:47:00 PM
32.5%		
Page 62: [33] Deleted	trung.lu	6/13/2004 5:47:00 PM
32.5%		
Page 62: [34] Deleted	Timothy Tardiff	6/17/2004 6:49:00 PM
HM 5.3		

Page 62: [34] Deleted

Timothy Tardiff

6/15/2004 12:09:00 PM