


VERTICAL
NO. 01-285-06879


CLOSE CLEARANCE

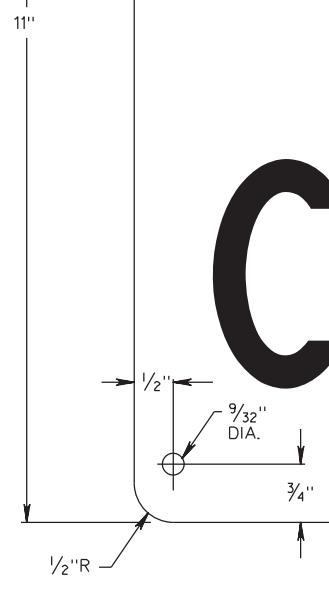

HORIZONTAL
STOCK NO. 01-285-06895

NOTES:

1. CLOSE CLEARANCE SIGNS SHALL BE DISPLAYED WHERE OBJECTS DO NOT PROVIDE FOR FULL CLEARANCE AS SET FORTH ON PLAN AM 70050.001-.002.
2. SIGNS SHALL BE LOCATED ON A FLAT SURFACE AS NEAR AS POSSIBLE TO CLOSE CLEARANCE SITUATION AND IN SUCH A MANNER AS TO BE HIGHLY VISIBLE TO ALL PERSONNEL. SIGNS SHALL BE MOUNTED ON FURRING STRIPS TO AFFORD VENTILATION.
3. LETTERS SHALL BE AS PER PLAN AM 78010.001.
4. SIGN PLATE SHALL BE 0.124 IN. - 5052 ALUMINUM.
5. ONE FACE OF THE PLATE SHALL BE COVERED WITH NO. 3970 WHITE SCHOTCHLITE DIAMOND GRADE REFLECTIVE FILM OR APPROVED EQUIVALENT AND LETTERS OF NO. 3650-12 BLACK SCOTCHCAL OR APPROVED EQUIVALENT.

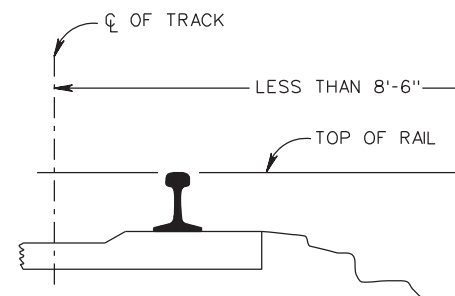

CLOSE CLEARANCE STRIPING FOR CATENARIES

1. CATENARY IS TO BE PROPERLY CLEANED PRIOR TO APPLICATION OF SHEETING TO ENSURE A GOOD BOND
2. SHEETING IS TO BE APPLIED TO FRONT, BACK AND INSIDE OF THE CATENARY, EXCEPT NOT TO THE BACK OF THE FLANGES.